


TIRE CHANGER

Produced in our tire service equipments factory, with 15,000 m² working plant, 1 hour from Shanghai Pudong international airport and city center, 20 minutes from Hongqiao airport.




Over 20 years professional experience;
Stable workforce;
Modern scientific management;
Advanced Production & Processing equipment;
Standardized production implements & tooling;
Company mission: continuously providing safety and reliable products;
Positioning Strategy: quality first, pursue perfect balance for quality and cost;

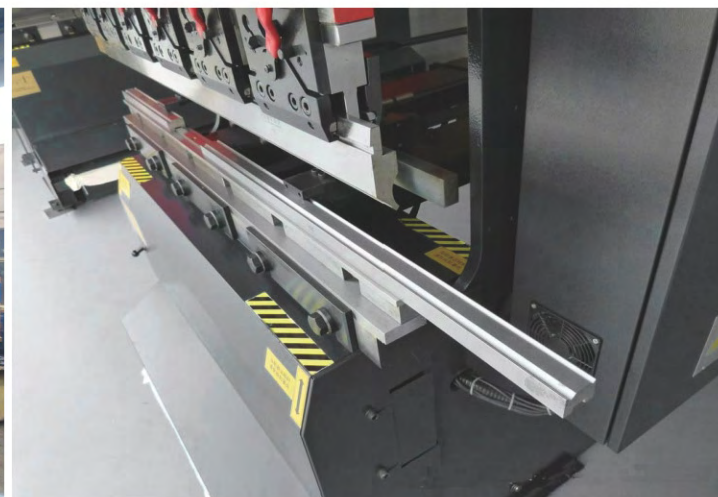

PROMOTION

PL-1211

HIGHER CLASS SERIES 1 year warranty



* Semi-automatic swing arm

* Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy


* Clamping jaws are totally one step die casting

Max working clamping 24"



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength

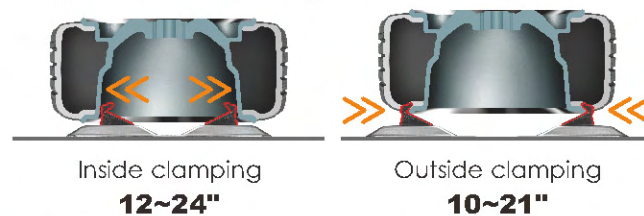


INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Force down the pressing roller behind the mount/demount head, keep 2-3mm between mount/demount head with tire rim, preventing mount/demount head scratch tire rim.
- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim

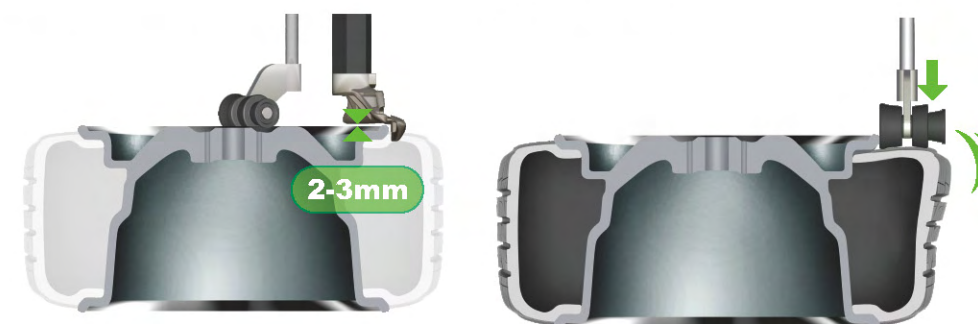

STANDARD PARTS




Digital inflating gun



Complete oil fog maker 2000



Jaw/200 protector (short)



Mount/demount head protector 3#



Complete Tyre pressing roller



Bead breaker shovel protection cover



Lifting lever




Oil-water box



Bead pressing tool

SPECIFICATIONS

Working pressure 8-10bar(116-145 psi)
Optional power supply 110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power 0.55/0.75/1.1 kw
N/G weight 207/229 kg(455/504 lbs)



PROMOTION


PL-1298IT

HIGHER CLASS SERIES 2 years warranty

- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * The round column is used as air tank
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres

RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength

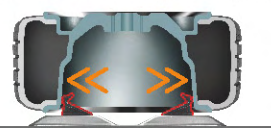

Inside clamping
14~28"



Outside clamping
12~26"

009 MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable homocentric
- * Function of lifting tire makes it easily to raise the low profile tires



INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series



STANDARD PARTS



Complete pressure
gauge box



Complete oil fog
maker 3500



Jaw/200 protector
(short)



Mount/demount
head protector 8#



Complete Tyre
pressing roller



Tyre pressing
head (upper)



Tyre pressing
head(bottom)



Tyre lifting
roller head



Bead breaker
shovel protection
cover



Lifting lever



Oil-water box




Bead pressing
tool



Rim Protection

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	254/310 kg (559/682 lbs)




PROMOTION

PL-1256

HIGHER CLASS SERIES 2 years warranty

- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting

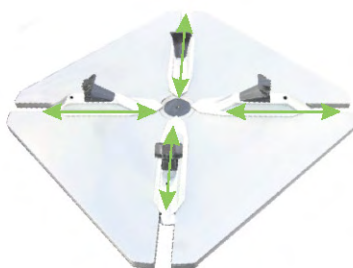

Max working clamping 26"



INDEPENDENT 056 HELP ARM SYSTEM

- * Curved & unique design 360° rotary tyre pressing help arm.
- * Central positioning function : make rim and tyre detached & clamp jaws quickly and conveniently.
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.



PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE




RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength




STANDARD PARTS

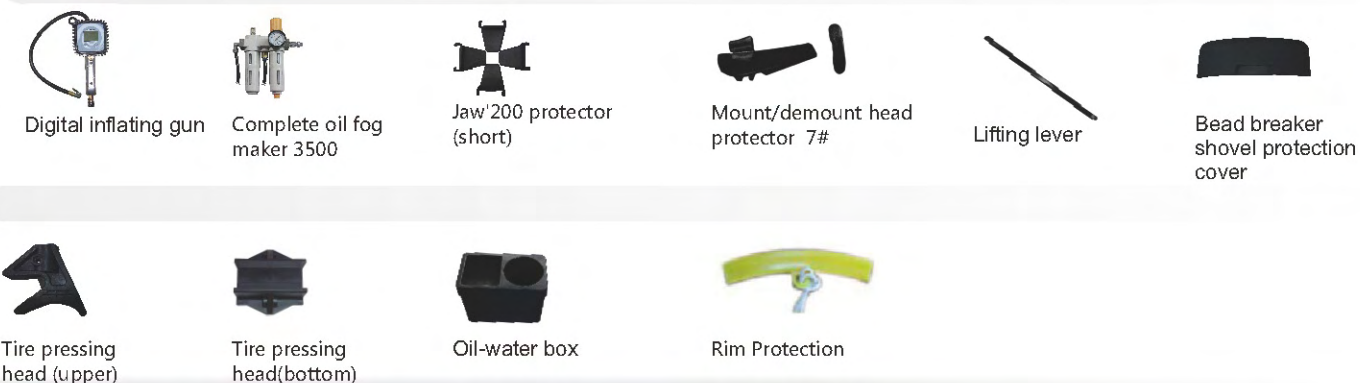

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(056 help arm)	1230*450*350mm(4*1.5*1 ft)
N/G weight	285/330 kg(628/728 lbs)



PROMOTION

PL-1256IT

HIGHER CLASS SERIES 2 years warranty

- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres

Max working clamping 26"

≤406mm
(16")

≤1143mm
(45")




INDEPENDENT 056 HELP ARM SYSTEM

- * Curved & unique design 360° rotary tyre pressing help arm.
- * Central positioning function : make rim and tyre detached & clamp jaws quickly and conveniently.
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE

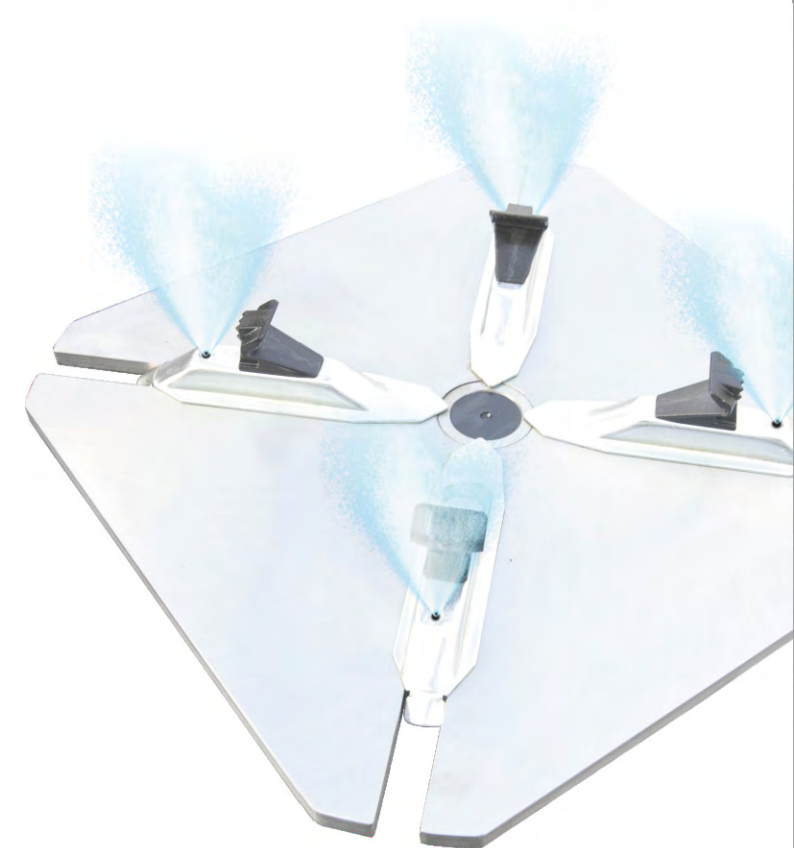


RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

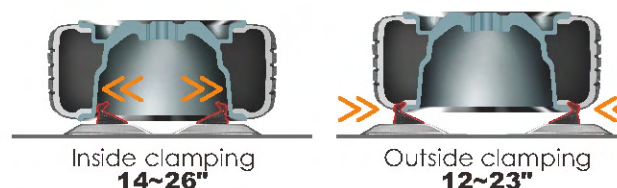


STANDARD PARTS

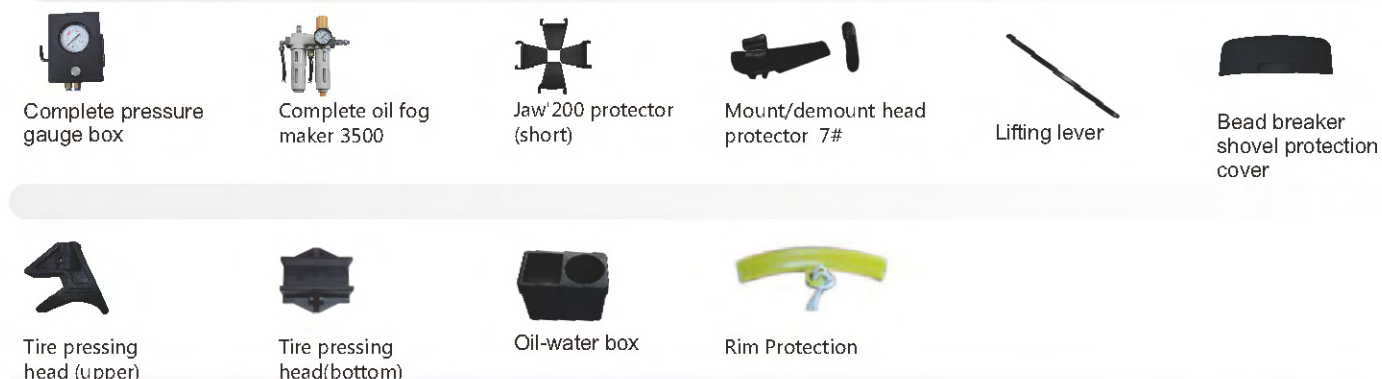

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(056 help arm)	1230*450*350mm(4*1.5*1 ft)
N/G weight	285/330 kg(628/728 lbs)



ALL IN ONE

PL-1200M


BASICE CLASS SERIES 1 year warranty

SAVE SPACE

Effective combination of Tyre Changer and Wheel Balancer, save HALF SPACE than the normal operating space

GOOD STABILITY

Wheel balancer effectively use tyre changer weight, prompting more stable in the balancing process

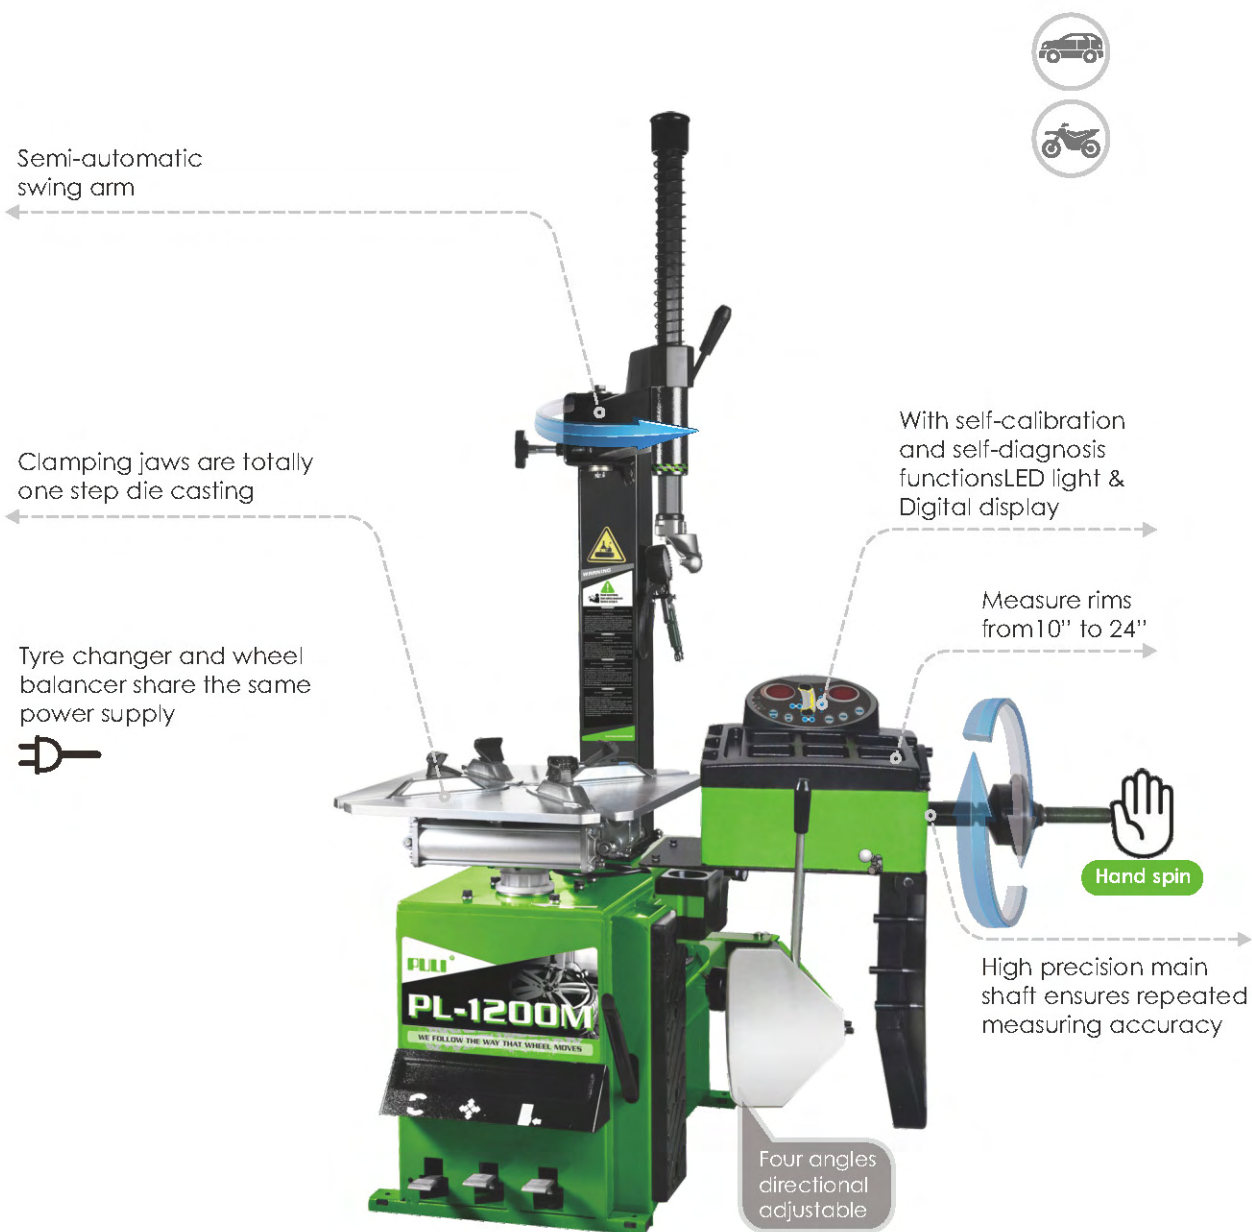


MOUNTING/DEMOUNTING TIRE



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength

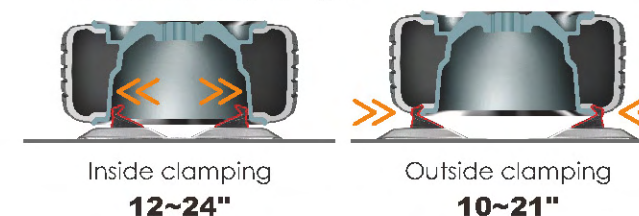

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	166/198 kg(365.2/418 lbs)

WHEEL BALANCE

5 balancing modes



SPECIFICATIONS

Optional power supply	110v (1ph)/ 220v (1/3ph)/ 380v (3ph)
Balancing speed	120 r.p.m
Balancing accuracy	$\pm 1\text{g}(\pm 0.04\text{ oz})$
Measuring time	8s
N/G weight	47/66 kg(103.4/145.2 lbs)

ALL IN ONE

PL-1206M


BASICE CLASS SERIES 1 year warranty

SAVE SPACE


Effective combination of Tyre Changer and Wheel Balancer, save HALF SPACE than the normal operating space

GOOD STABILITY

Wheel balancer effectively use tyre changer weight, prompting more stable in the balancing process

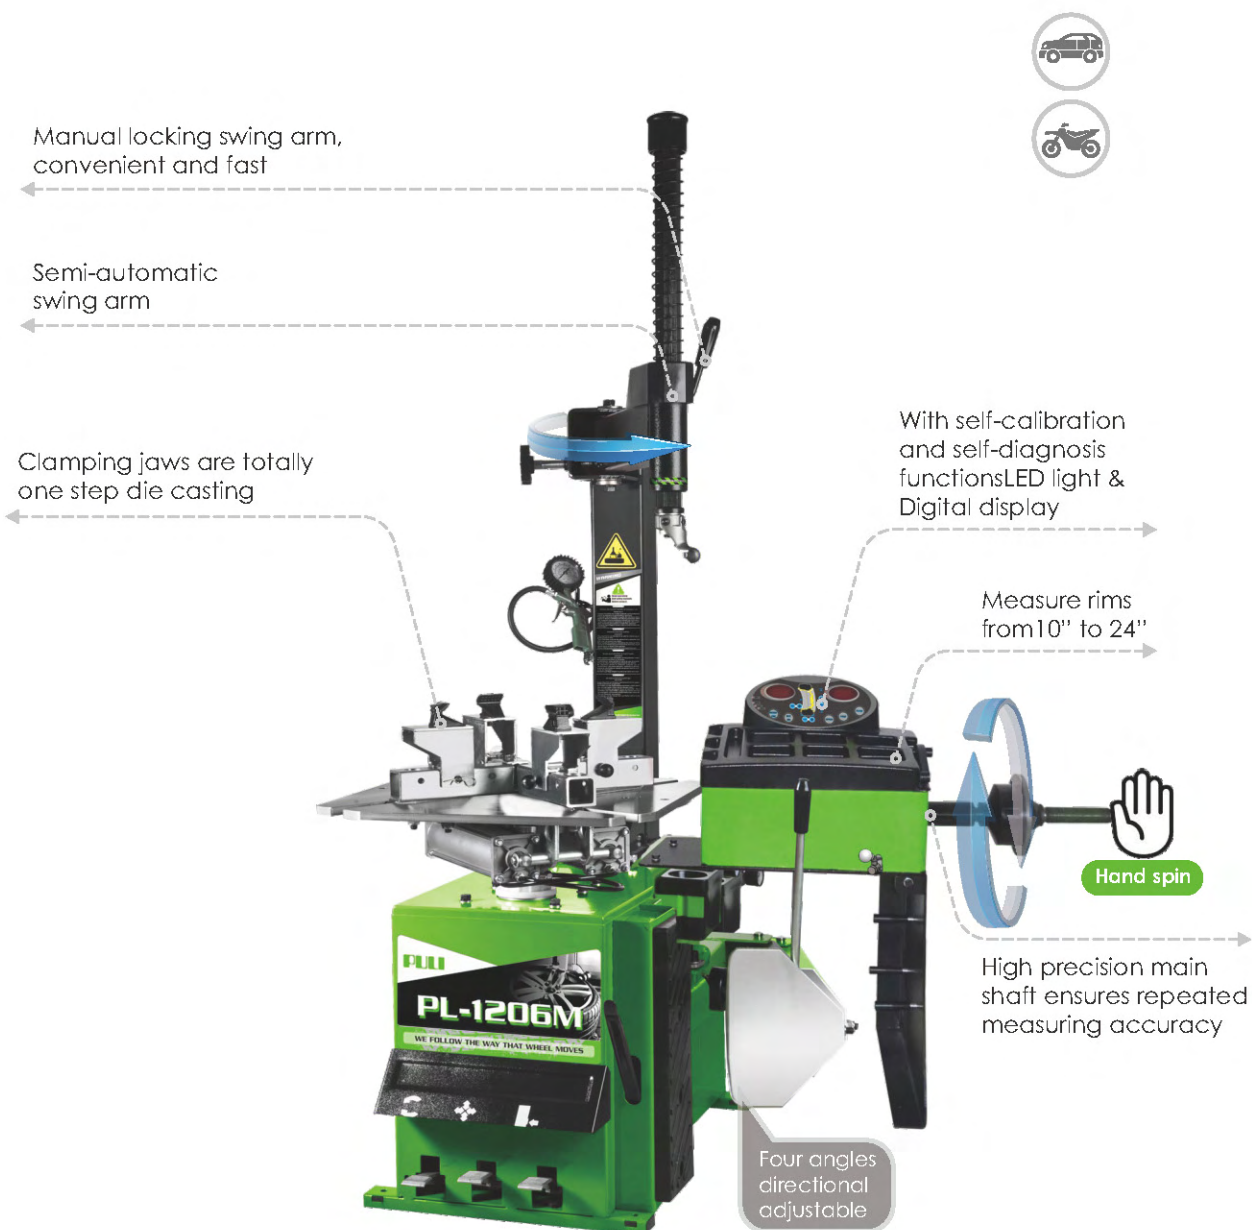

MOUNTING/DEMOUNTING TIRE

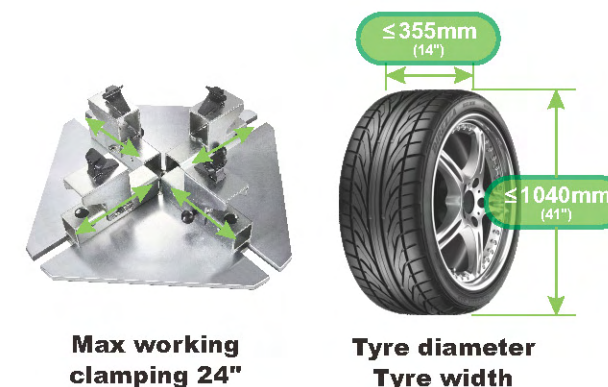

RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength



SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	166/188 kg(365.2/413.6 lbs)

WHEEL BALANCE

5 balancing modes




SPECIFICATIONS

Optional power supply	110v (1ph)/ 220v (1/3ph)/ 380v (3ph)
Balancing speed	120 r.p.m
Balancing accuracy	±1g(±0.04 oz)
Measuring time	8s
N/G weight	47/66 kg(103.4/145.2 lbs)

PL-1260

BASIC SERIES 1 year warranty




- * Special design non- central turntable and high power motor, greatly increase work strength
- * Max working clamping 22"



RIM CLAMPING METHOD

22" large turntable and high power motor, which increase working strength

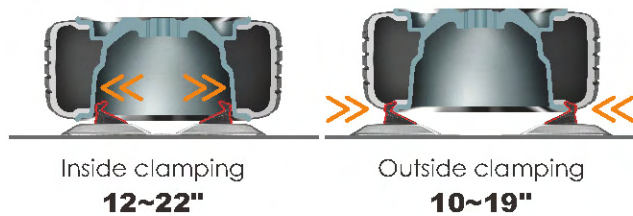


Four angles directional adjustable

STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	166/188kg(365.2/413.6 lbs)



PL-1261

BASIC SERIES 1 year warranty




- * Special design non- central turntable and high power motor, greatly increase work strength
- * Max working clamping 24"



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength

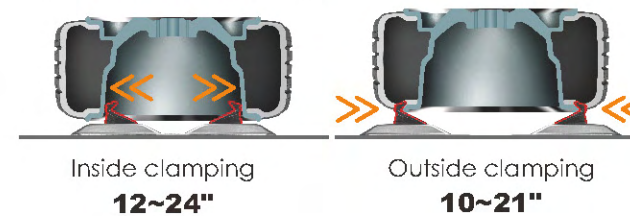


Four angles directional adjustable

STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	166/188kg(365.2/413.6 lbs)



PL-1206

BASIC SERIES 1 year warranty



- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting, low broken rate

- * Special motorcycle adaptor is suitable for clamping various motorcycle tyres
- * Max working clamping 24"



RIM CLAMPING METHOD

20" large turntable and high power motor, which increase working strength



Outside clamping
6~24"



Four angles
directional
adjustable

STANDARD PARTS



Complete inflating
gun



Complete oil fog
maker 2000




Lifting lever



Oil-water box


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	166/188kg(365.2/413.6 lbs)



PL-1200

BASIC SERIES 1 year warranty




- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting, low broken rate

- * 24" turntable and high power motor greatly increase work strength
- * Max working clamping 24"



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength



Inside clamping
12~24"



Outside clamping
10~21"



Four angles
directional
adjustable

STANDARD PARTS



Complete inflating
gun



Complete oil fog
maker 2000




Lifting lever



Oil-water box


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	166/190kg(365.2/418 lbs)



PL-1201

BASIC SERIES 1 year warranty




- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting, low broken rate

- * **Bigger machine body with 24" turntable, greatly increase work strength**
- * **Max working clamping 24"**



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength

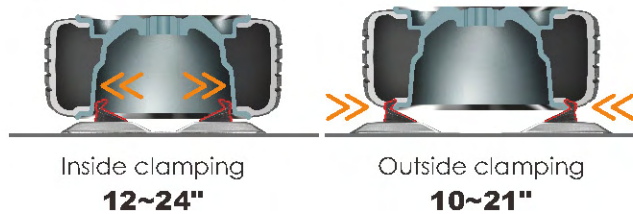


Four angles directional adjustable

STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	188/210kg(413.6/462 lbs)



PL-1201IT

BASIC SERIES 1 year warranty




- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting, low broken rate

- * **Bigger machine body with 24" turntable, greatly increase work strength**
- * **Max working clamping 24"**



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength

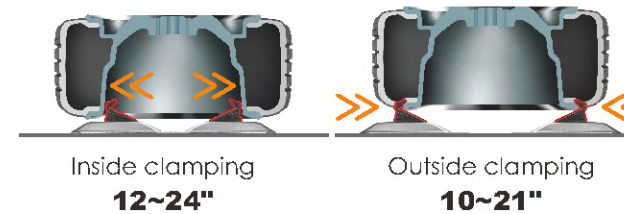


Four angles directional adjustable

STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	200/222kg(440/488.4 lbs)



PL-1221

BASIC SERIES 1 year warranty




- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position

- * Suitable for bigger and wider various new tyres, including some low profile tyres
- * Max working clamping 24"



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength

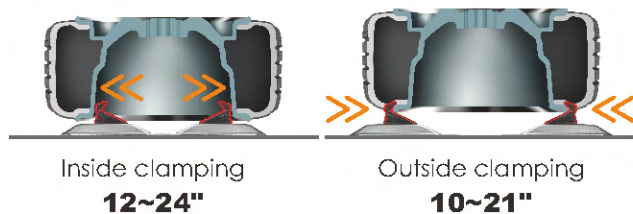


STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	210/234kg(462/514.8 lbs)



PL-1221IT

BASIC SERIES 1 year warranty




- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position

- * Suitable for bigger and wider various new tyres, including some low profile tyres
- * Max working clamping 24"



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength

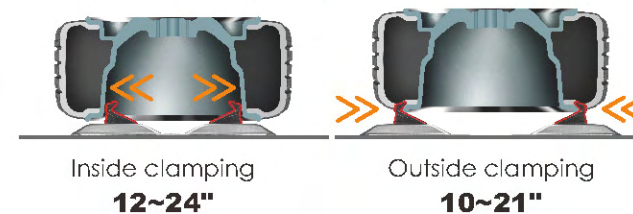


STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	219/241kg(481.8/530.2 lbs)



PL-1226

BASIC SERIES 1 year warranty

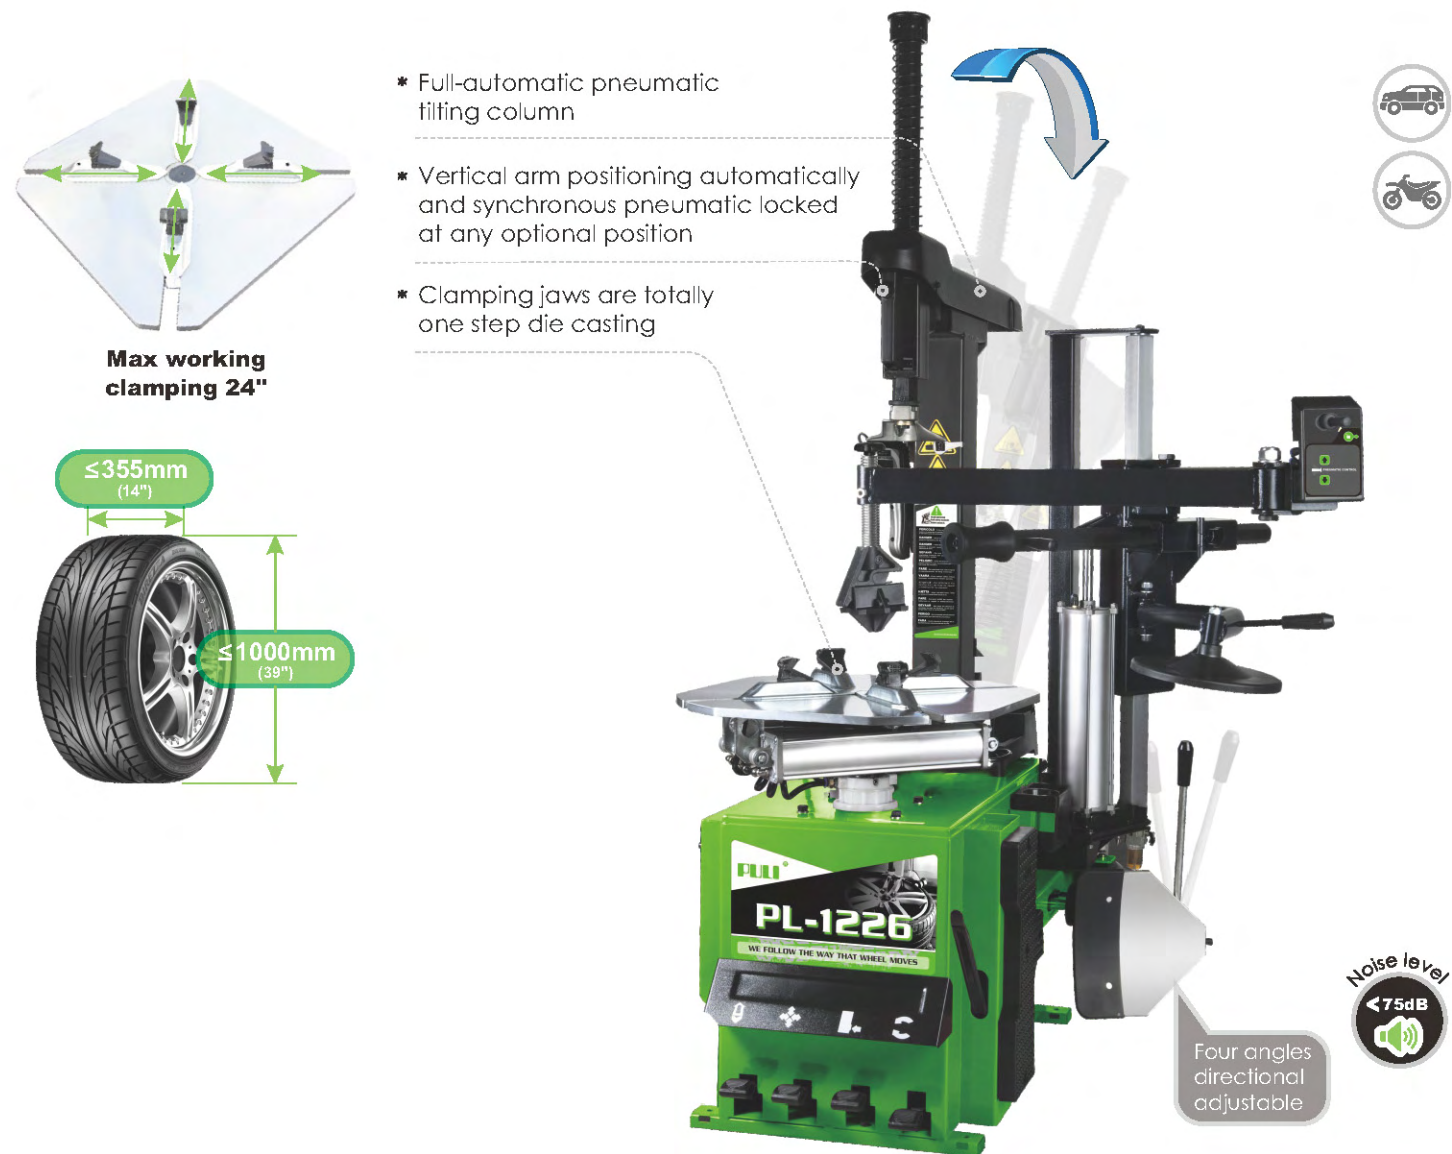

INDEPENDENT 006 HELP ARM SYSTEM


- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- * Central positioning function: make rim and tyre detached& clamp jaws quickly and conveniently



PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE

RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength

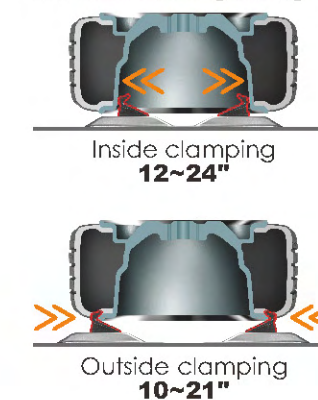


STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(006 help arm)	1230*450*350mm(4.0*1.5*1.2 ft)
N/G weight(main body)	210/234 kg(462/525 lbs)
N/G weight(006 help arm)	66/77 kg(145/169 lbs)
N/G weight(total)	276/311 kg(607.2/684.2 lbs)




PL-1226IT

BASIC SERIES 1 year warranty

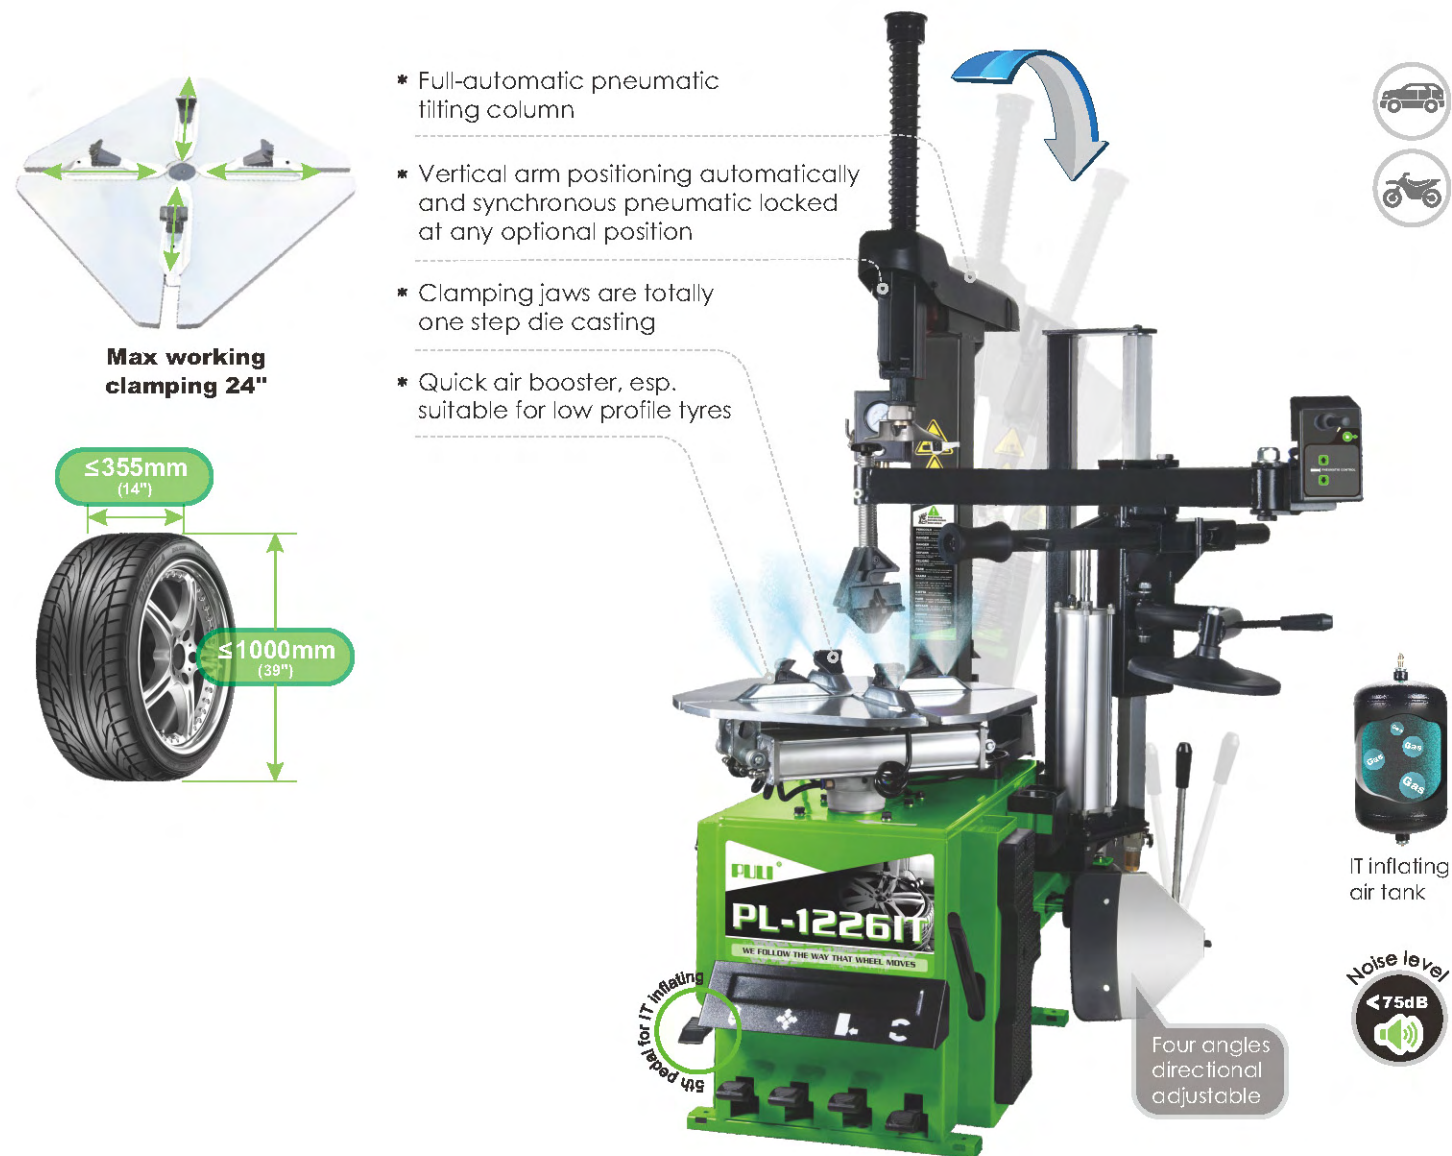

INDEPENDENT 006 HELP ARM SYSTEM


- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently

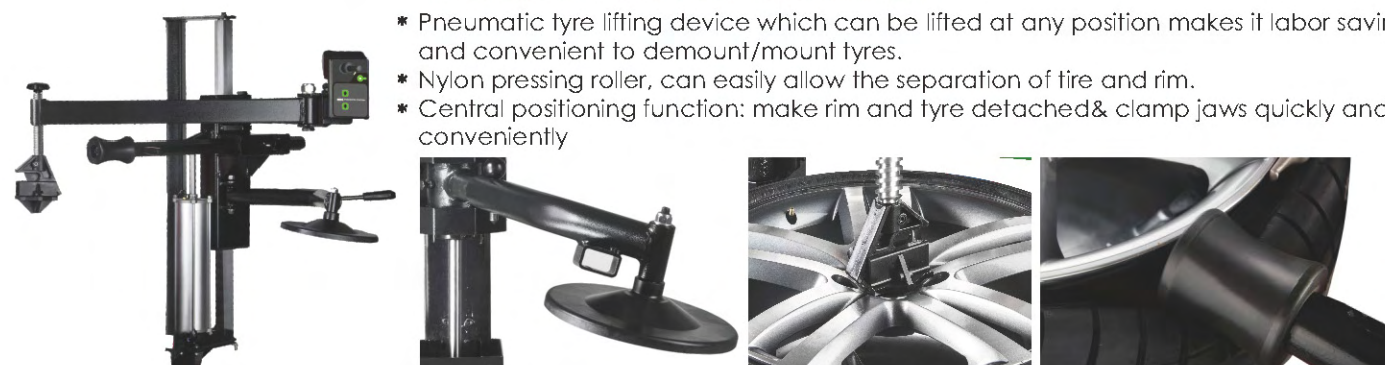

PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE

RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength

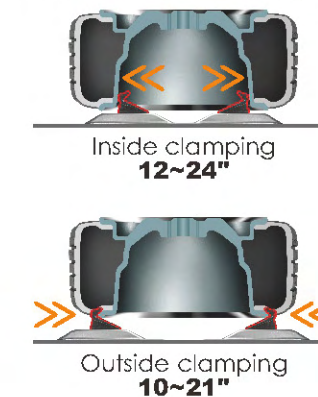


STANDARD PARTS



SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(006 help arm)	1230*450*350mm(4.0*1.5*1.2 ft)
N/G weight(main body)	229/255 kg(462/525 lbs)
N/G weight(006 help arm)	66/77 kg(145/169 lbs)
N/G weight(total)	295/332 kg(649/730.4 lbs)



PL-1227

BASIC SERIES 1 year warranty



INDEPENDENT 007B HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- * Central positioning function: make rim and tyre detached& clamp jaws quickly and conveniently




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE



RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength



Inside clamping
12~24"



Outside clamping
10~21"

STANDARD PARTS



Digital inflating gun



Complete oil fog maker 2000



Jaw/200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Tire pressing head (bottom)



Bead breaker shovel protection cover



Lifting lever




Oil-water box



Rim protection


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(007 help arm)	1550*310*550mm(5.1*1.0*1.8 ft)
N/G weight(main body)	210/234 kg(462/515 lbs)
N/G weight(007 help arm)	90/104 kg(198/229 lbs)
N/G weight(total)	300/338 kg(660/743 lbs)



PL-1227IT

BASIC SERIES 1 year warranty

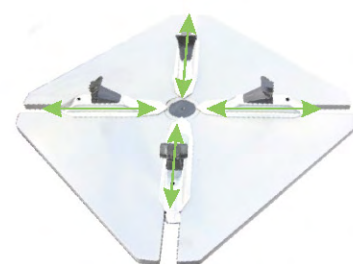

Max working clamping 24"



- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres



IT inflating air tank



Noise level <75dB

Four angles directional adjustable



INDEPENDENT 007B HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently



PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE



RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 2000



Jaw/200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Tire pressing head (bottom)



Bead breaker shovel protection cover



Lifting lever




Oil-water box



Rim protection


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(007 help arm)	1550*310*550mm(5.1*1.0*1.8 ft)
N/G weight(main body)	229/255 kg(504/561 lbs)
N/G weight(007 help arm)	90/104 kg(198/229 lbs)
N/G weight(total)	310/359 kg(660/743 lbs)



PL-1228

BASIC SERIES 1 year warranty

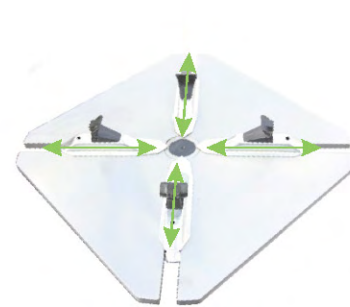

Max working clamping 28"



- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres



IT inflating air tank



Four angles directional adjustable

007B+008 DOUBLE HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently



PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE



RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength



Inside clamping 16~28"



Outside clamping 12~26"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Jaw/200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Tire pressing head (bottom)



Bead breaker shovel protection cover



Lifting lever




Oil-water box



Rim protection


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(007 help arm)	1550*310*550mm(5.1*1.0*2.9 ft)
Dimension(008 help arm)	1230*450*350mm(4.0*1.5*1.2 ft)
N/G weight(main body)	273/313 kg(598/688 lbs)
N/G weight(total)	428/494 kg(942/1087 lbs)



PL-1203

HIGHER CLASS SERIES 2 years warranty

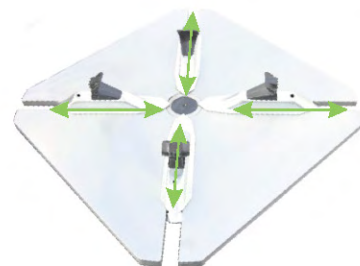


Max working clamping 26"

- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting



RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength

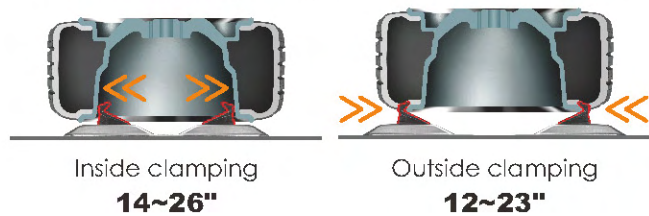

Four angles directional adjustable

STANDARD PARTS



Complete inflating gun



Complete oil fog maker 3500




Lifting lever



Oil-water box


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	212/240kg(466/528 lbs)



PL-1203IT

BASIC SERIES 2 year warranty

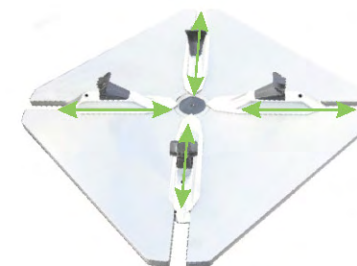


Max working clamping 26"

- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * The round column is used as air tank
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres



RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength

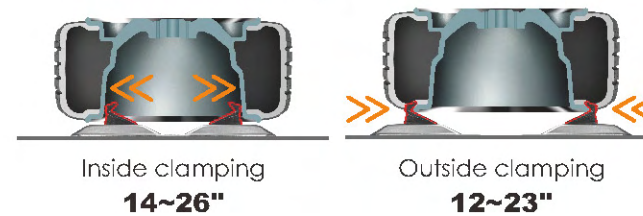

Four angles directional adjustable

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500




Lifting lever



Oil-water box

SPECIFICATIONS


Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	215/243kg(473/535 lbs)



PL-1209

HIGHER CLASS SERIES 2 years warranty

- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting

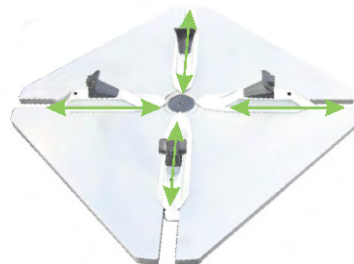

Max working clamping 26"



Four angles directional adjustable



009 MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable homocentric
- * Function of lifting tire makes it easily to raise the low profile tires




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE




RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

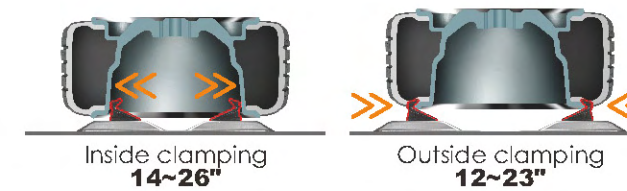


STANDARD PARTS

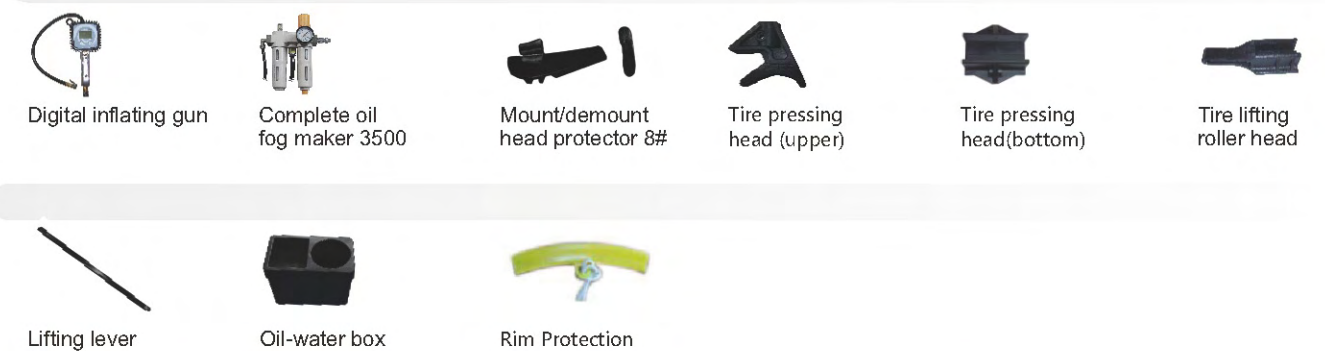

SPECIFICATIONS


Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	230/258kg(506/568 lbs)




PL-1209IT

HIGHER CLASS SERIES 2 years warranty

- * Manual locking swing arm, convenient and fast
- * Semi-automatic swing arm
- * The round column is used as air tank
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres

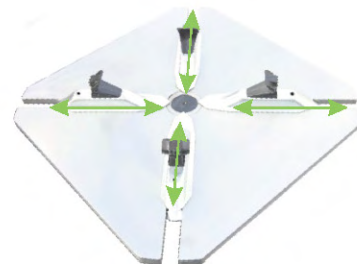

Max working clamping 26"

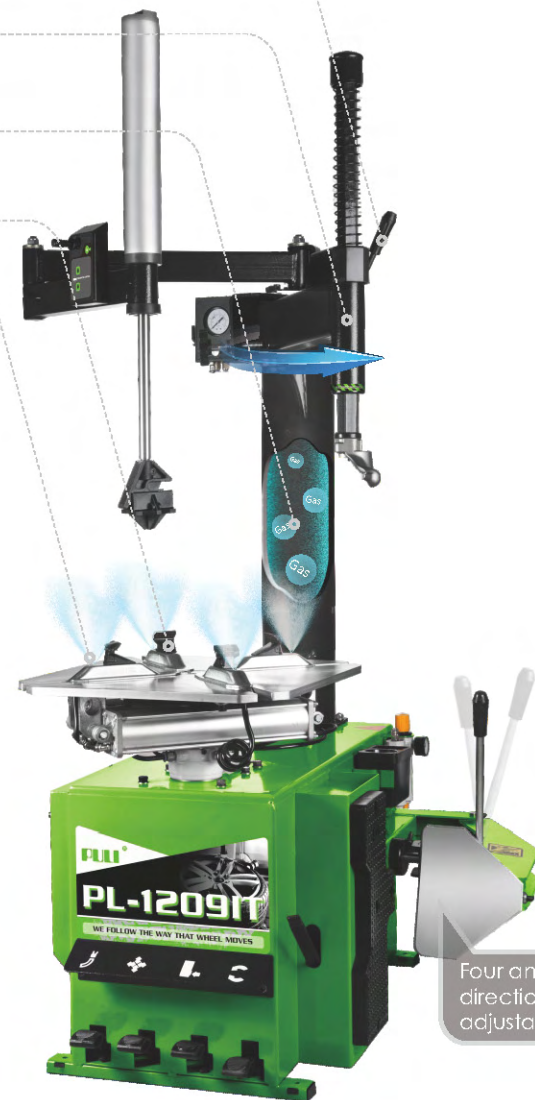

Four angles directional adjustable




009 MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable homocentric
- * Function of lifting tire makes it easily to raise the low profile tires




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE

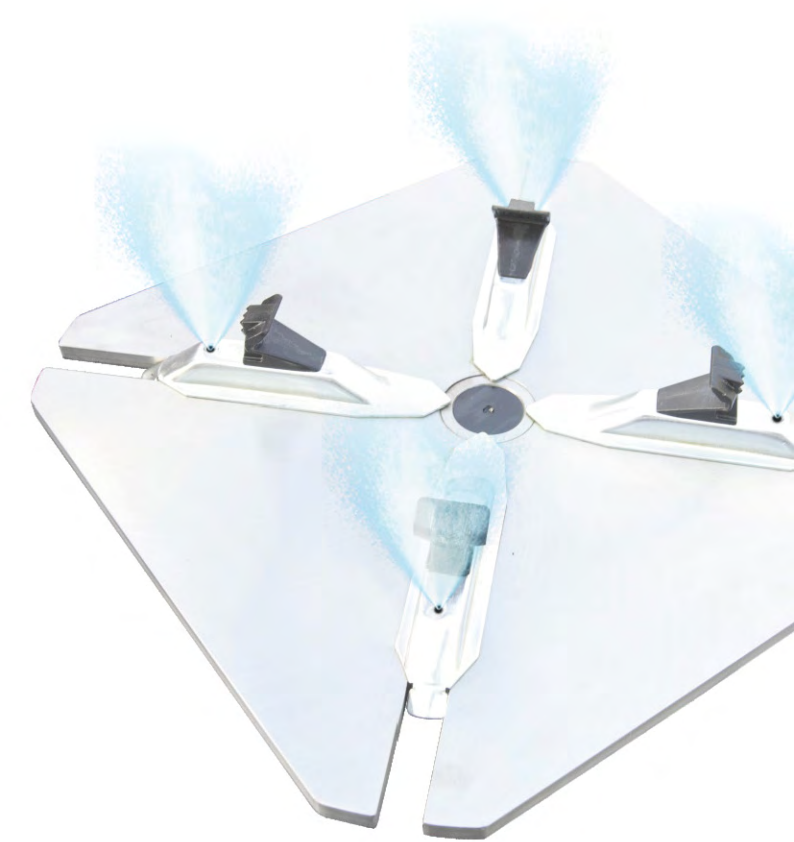


RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

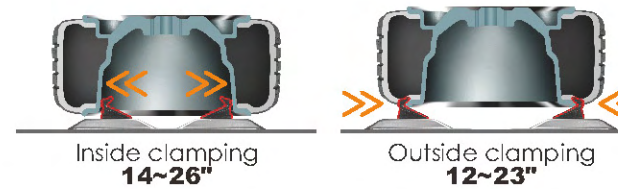


STANDARD PARTS

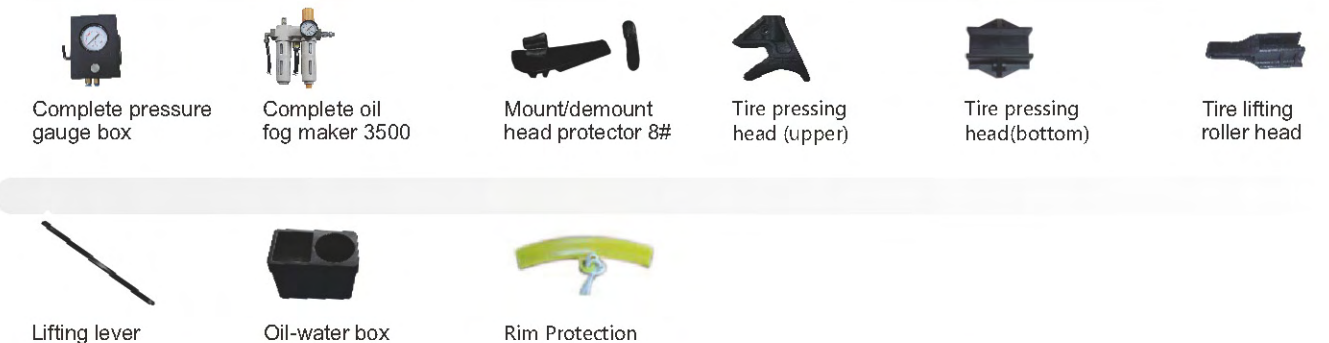


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	233/261 kg(513/574 lbs)



PL-1291

HIGHER CLASS SERIES 2 years warranty

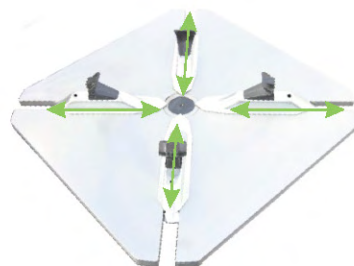

Max working clamping 26"



- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting




Four angles directional adjustable



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

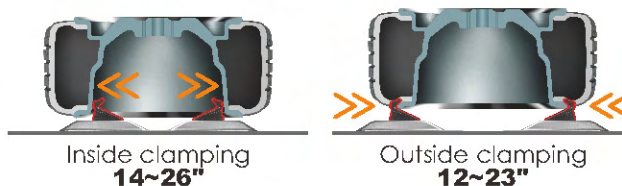

INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series



STANDARD PARTS



Digital inflating gun



Complete oil fog maker 3500



Jaw 200 protector (short)



Mount/demount head protector 8#



Tire pressing head (upper)



Tire pressing head (bottom)



Complete Tyre pressing roller



Bead breaker shovel protection cover



Lifting lever



Oil-water box




Bead pressing tool



Rim Protection tool


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	241/269 kg (530/592 lbs)



PL-1291IT


HIGHER CLASS SERIES 2 years warranty

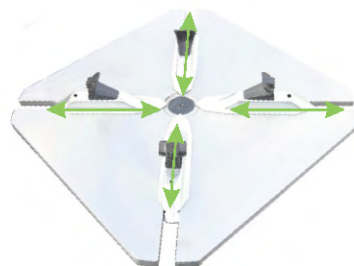

Max working clamping 26"



- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * The round column is used as air tank
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres

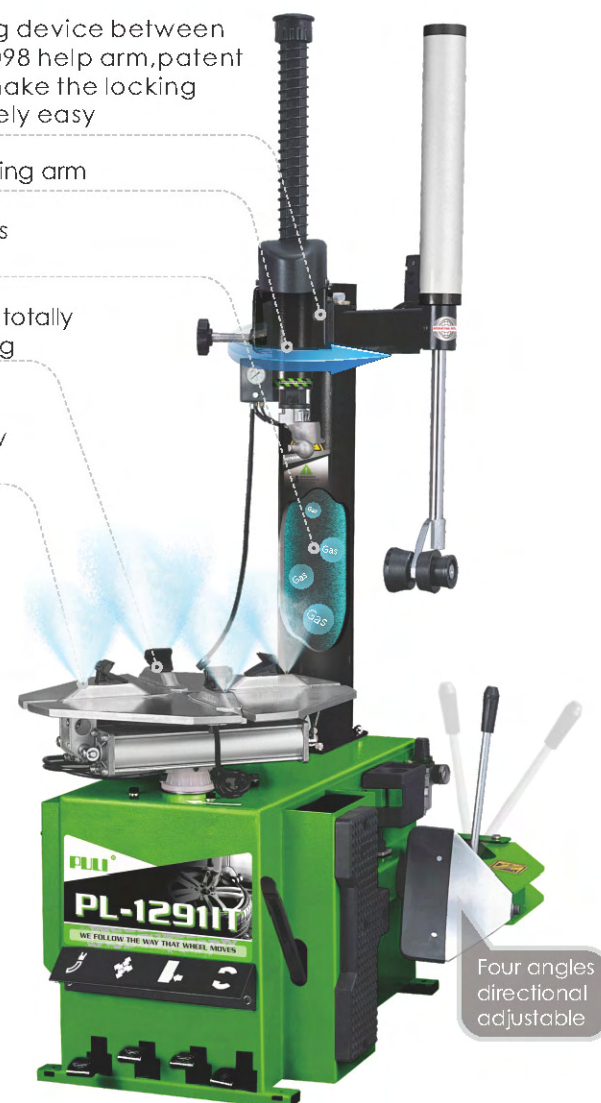


Four angles directional adjustable



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

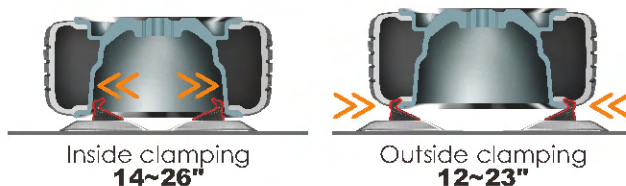

INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series




STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	242/270 kg (532/594 lbs)



PL-1292

HIGHER CLASS SERIES 2 years warranty

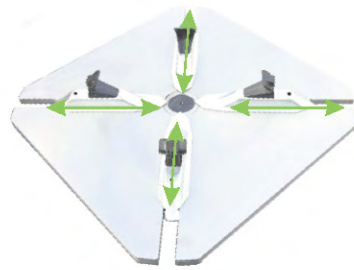


Max working clamping 26"



- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting

RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"



Four angles directional adjustable

009 MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable homocentric
- * Function of lifting tire makes it easily to raise the low profile tires




INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series

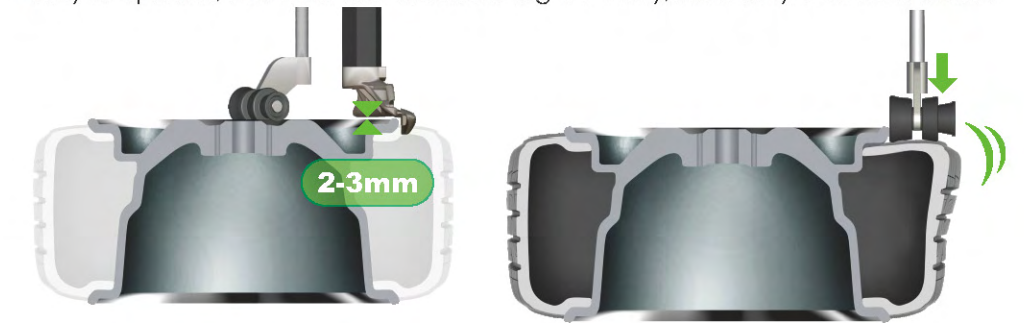

STANDARD PARTS



Digital inflating gun



Complete oil fog maker 3500



Jaw/200 protector (short)



Mount/demount head protector 8#



Complete Tyre pressing roller



Tire pressing head (upper)



Tire pressing head (bottom)



Tire lifting roller head



Bead breaker shovel protection cover



Lifting lever



Oil-water box




Bead pressing tool



Rim Protection


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	244/272 kg (538/600 lbs)



PL-1592

BASIC SERIES 1 year warranty

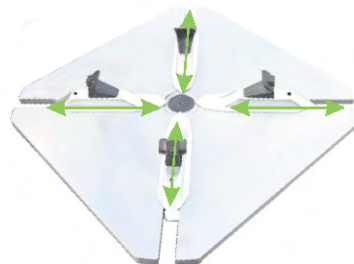


Max working clamping 26"



- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting

RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"



Four angles directional adjustable

009 MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- Central positioning function which can make wheel and turntable homocentric
- Function of lifting tyre makes it easily to raise the low profile tires




INTERNATIONAL PATENT




INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series

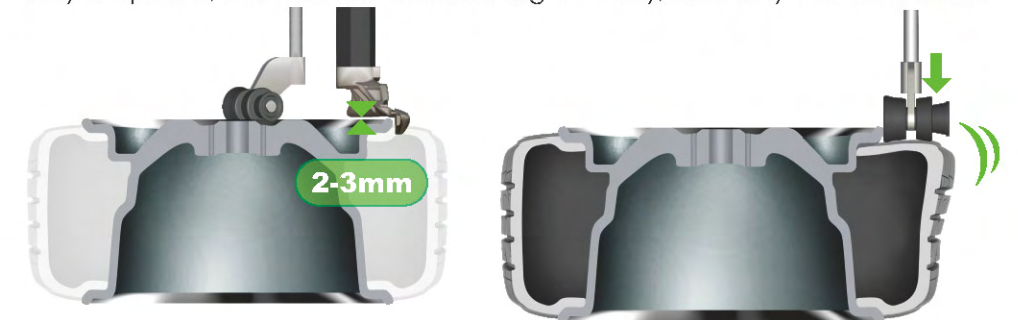


STANDARD PARTS

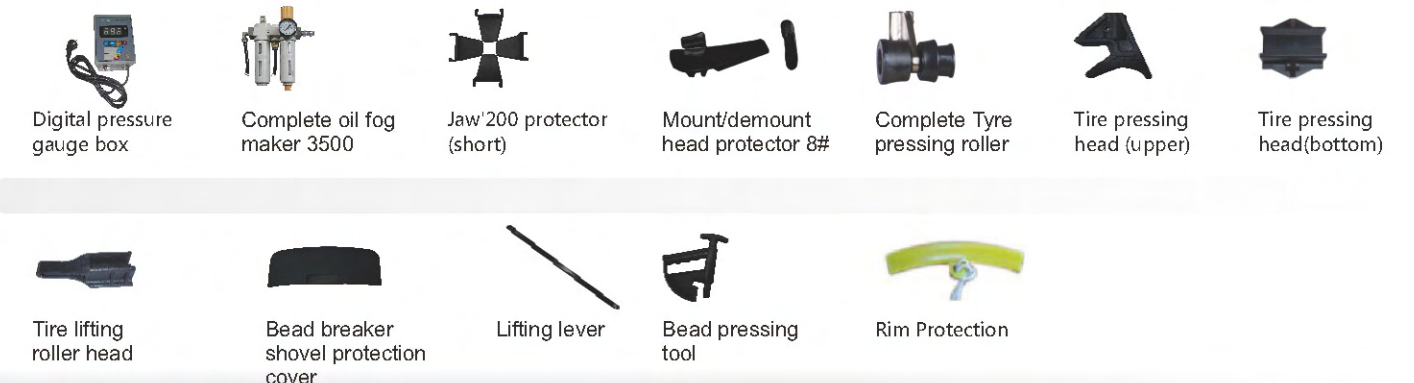

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	254/310 kg (559/682 lbs)




PL-1298IT

HIGHER CLASS SERIES 2 years warranty

- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * The round column is used as air tank
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres

RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength




Inside clamping
14~28"



Outside clamping
12~26"

009 MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable homocentric
- * Function of lifting tire makes it easily to raise the low profile tires

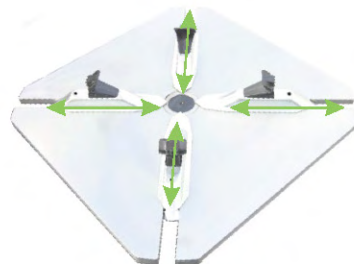

Max working
clamping 28"



Four angles
directional
adjustable

INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series



STANDARD PARTS



Complete pressure
gauge box



Complete oil fog
maker 3500



Jaw/200 protector
(short)



Mount/demount
head protector 8#



Complete Tyre
pressing roller



Tire pressing
head (upper)



Tire pressing
head (bottom)



Tire lifting
roller head



Bead breaker
shovel protection
cover



Lifting lever



Oil-water box




Bead pressing
tool



Rim Protection

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	254/310 kg (559/682 lbs)




PL-1598IT

HIGHER CLASS SERIES 2 years warranty

- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting
- * The round column is used as air tank
- * Quick air booster, esp. suitable for low profile tyres

RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength

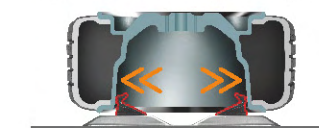


Inside clamping
14~28"



Outside clamping
12~26"

009 MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable homocentric
- * Function of lifting tire makes it easily to raise the low profile tires

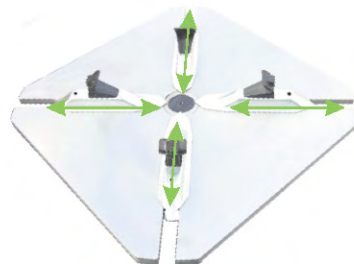

Max working
clamping 28"



Four angles
directional
adjustable




INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series

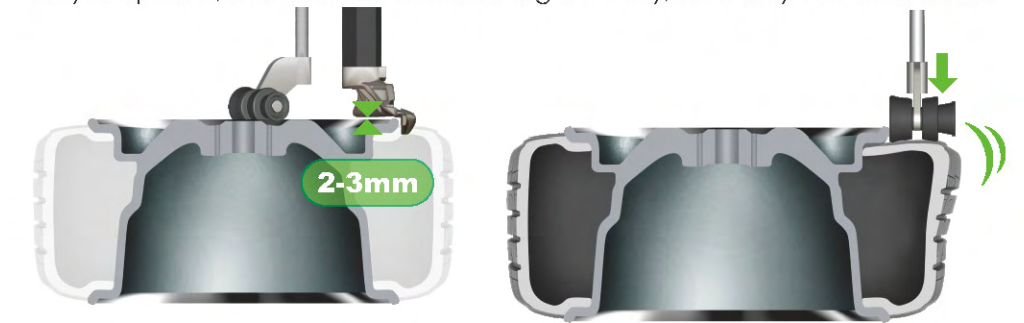

STANDARD PARTS



Digital pressure
gauge box



Complete oil
fog maker 3500



Jaw'200 protector
(long)



Mount/demount
head protector 8#



Tire pressing
head (upper)



Tire pressing
head(bottom)



Tire lifting
roller head



Bead breaker
shovel protection
cover



Lifting lever



Oil-water box



Bead pressing
tool




Complete Tyre
pressing roller



Rim Protection


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(037 help arm)	1550*310*550mm(3.8*1*1.8 ft)
N/G weight(main body)	245/285 kg (540/628 lbs)
N/G weight(037 help arm)	90/104 kg (198/229lbs)
N/G weight(total)	335/389 kg(737/856 lbs)



PL-1297IT

HIGHER CLASS SERIES 2 years warranty

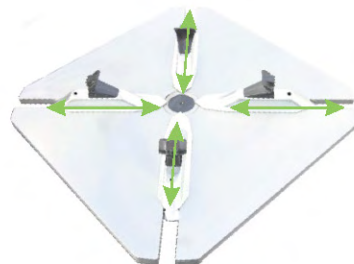


Max working clamping 28"



- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting
- * The round column is used as air tank
- * Quick air booster, esp. suitable for low profile tyres

RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~28"



Outside clamping 12~26"



INDEPENDENT 037 LEFT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount / mount tyres.
- * 360° rotary tyre pressing help arm, pressing tyre and central positioning.



INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series



STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Jaw 200 protector (short)



Mount/demount head protector 8#



Tire pressing head (upper)



Tire pressing head (bottom)



Bead breaker shovel protection cover



Lifting lever



Oil-water box




Complete Tyre pressing roller



Rim Protection

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(037 help arm)	1550*310*550mm(3.8*1*1.8 ft)
N/G weight(main body)	245/285 kg (540/628 lbs)
N/G weight(037 help arm)	90/104 kg (198/229lbs)
N/G weight(total)	335/389 kg(737/856 lbs)



PL-1293IT

HIGHER CLASS SERIES 2 years warranty



- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * The round column is used as air tank



- * 5# plastic demount/mount head, avoiding the metal bird head scratch rims effectively.



- * Quick air booster makes the tyre and rim jointed instantly, especially suitable for the low profile tyre.



- * Lift side pneumatic tyre lifter to help easy lift up the tyres, save man-power.



- * Wider and bigger machine cabinet and central positioning flange for 28" rims greatly increase work strength.
- * Max working scope up to 28"!!!



Four angles directional adjustable

INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series



STANDARD PARTS



Digital inflating gun



Complete oil fog maker 3500



Complete Mount/demount head 8#



Mount/demount head protector 8#



Complete Tyre pressing roller



Bead breaker shovel protection cover



Lifting lever



Oil-water box



Bead pressing tool



Complete quick release nut (tyre changer)




Cones set (tyre changer)



Rim Protection

SPECIFICATIONS

Rim dimensions	8"~28"
Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	236/260 kg(519/571 lbs)



PL-1295

HIGHER CLASS SERIES 2 years warranty



- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm



* 5# plastic demount/mount head, avoiding the metal bird head scratch rims effectively.



* Lift side pneumatic tyre lifter to help easy lift up the tyres, save man-power.



MULTI-FUNCTION LEFT HELP ARM

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable in ceter position
- * Function of lifting tire makes it easily to raise the low profile tires, no lever to dismount the down bead

- * Wider and bigger machine cabinet and central positioning flange for 28" rims greatly increase work strength.
- * Max working scope up to 28"!!!



INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series




STANDARD PARTS




SPECIFICATIONS

Rim dimensions	8"~28"
Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Bead breaker force	2500kg
N/G weight	355/325 kg(715/781 lbs)



PL-1231

HIGHER CLASS SERIES 2 years warranty

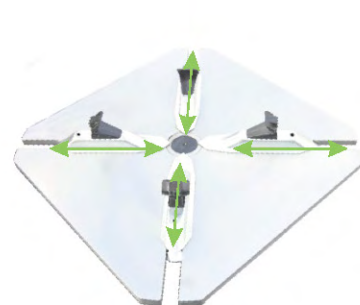


Max working clamping 26"

- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting



RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength

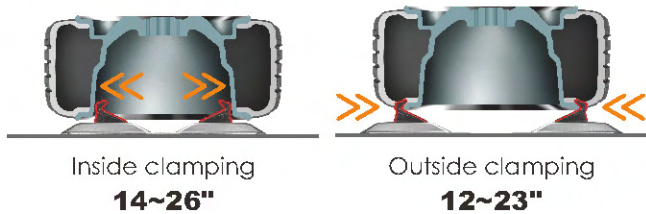

Four angles directional adjustable

STANDARD PARTS



Complete inflating gun



Complete oil fog maker 3500



Mount/demount head protector 7#




Lifting lever



Oil-water box


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	228/256kg(473/535 lbs)



PL-1231T

BASIC SERIES 2 year warranty

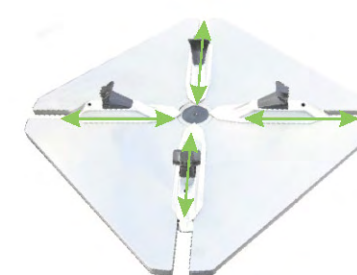


Max working clamping 26"

- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres



RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength

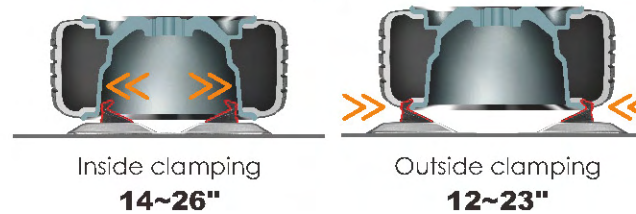

Four angles directional adjustable

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Mount/demount head protector 7#




Lifting lever



Oil-water box


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	240/268kg(528/590 lbs)



PL-1236

HIGHER CLASS SERIES 2 years warranty

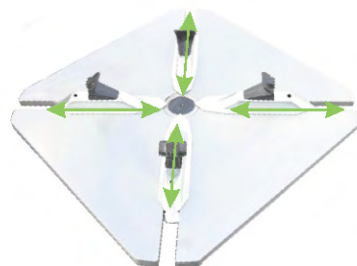

Max working clamping 26"




- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting



Four angles directional adjustable

INDEPENDENT 036 RIGHT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm

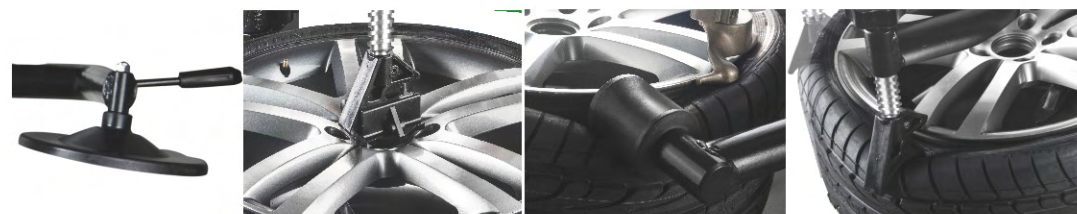


PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE




RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

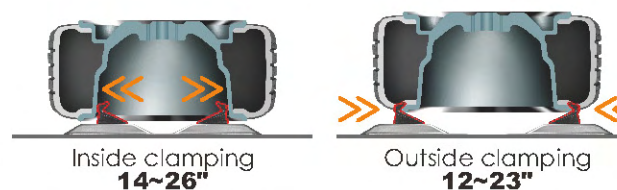


STANDARD PARTS

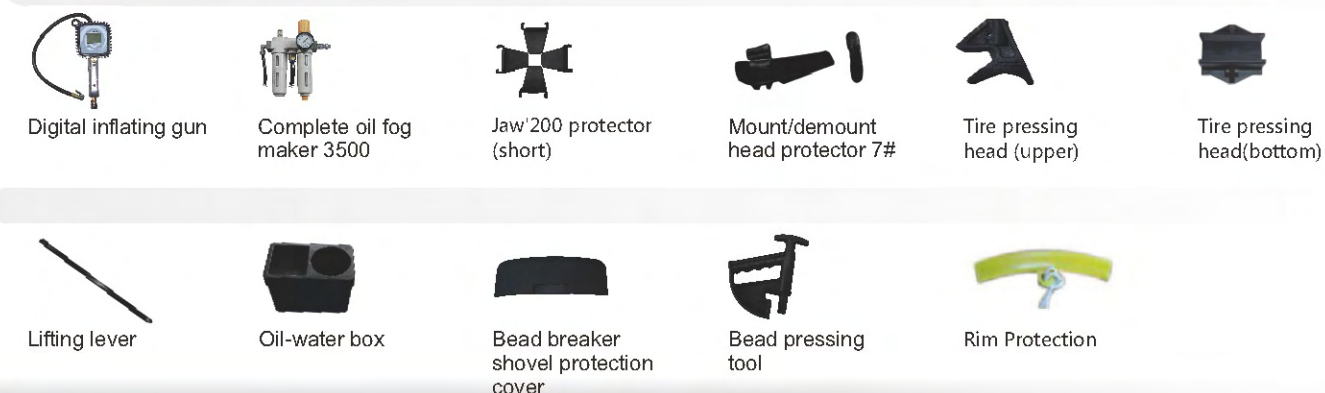

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(036 help arm)	1230*450*350mm(4.0*1.5*1.1 ft)
N/G weight(main body)	228/256 kg (502/563 lbs)
N/G weight(036 help arm)	66/77 kg (145/169lbs)
N/G weight(total)	305/333 kg(671/733 lbs)




PL-1236IT

HIGHER CLASS SERIES 2 years warranty

* Full-automatic pneumatic tilting column

* Vertical arm positioning automatically and synchronous pneumatic locked at any optional position

* Clamping jaws are totally one step die casting

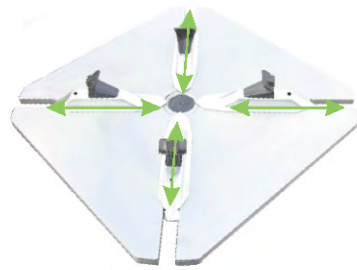

Max working clamping 26"



INDEPENDENT 036 RIGHT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

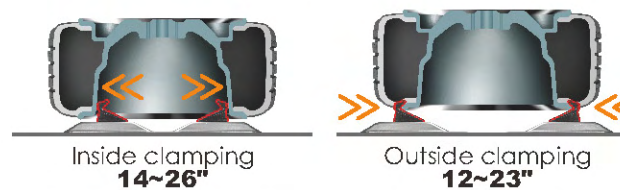


STANDARD PARTS



SPECIFICATIONS


Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(036 help arm)	1230*450*350mm(4.0*1.5*1.1 ft)
N/G weight(main body)	240/268 kg (528/590 lbs)
N/G weight(036 help arm)	66/77 kg (145/169lbs)
N/G weight(total)	306/345 kg(673/759 lbs)



PL-1237

HIGHER CLASS SERIES 2 years warranty

- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Full-automatic pneumatic tilting column
- * Clamping jaws are totally one step die casting

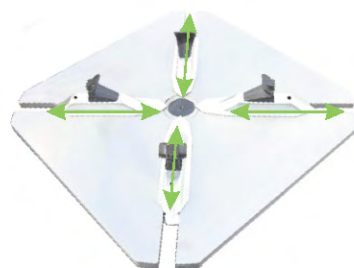

Max working clamping 26"



Four angles directional adjustable

INDEPENDENT 037B LEFT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE




RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

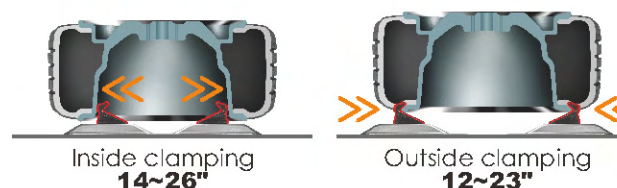


STANDARD PARTS

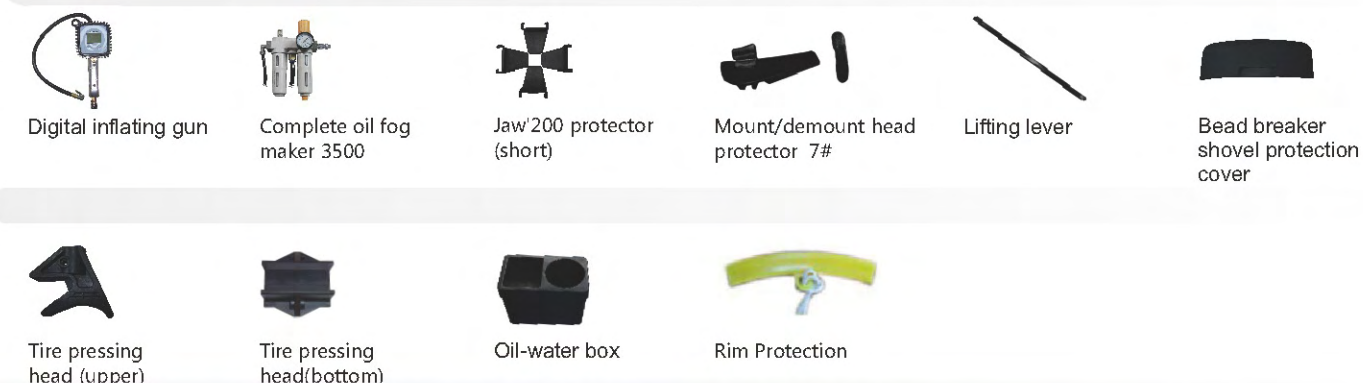


SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(037B help arm)	1550*310*550mm(3.8*1.0*1.8 ft)
N/G weight(main body)	228/256 kg (502/563 lbs)
N/G weight(037B help arm)	90/104 kg (198/229lbs)
N/G weight(total)	318/360 kg(700/360 lbs)



PL-1237IT

HIGHER CLASS SERIES 2 years warranty

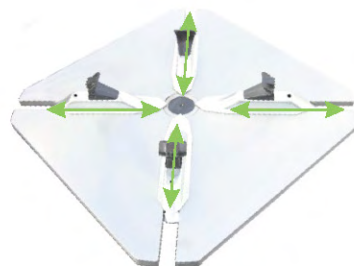

Max working clamping 26"



- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres




INDEPENDENT 037B LEFT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE

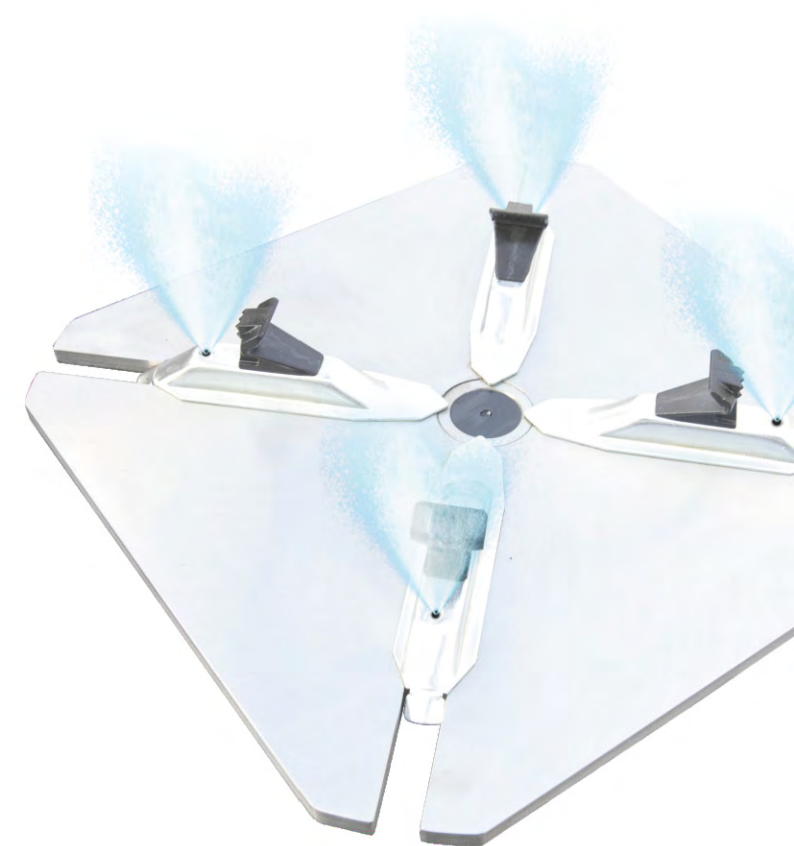

RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

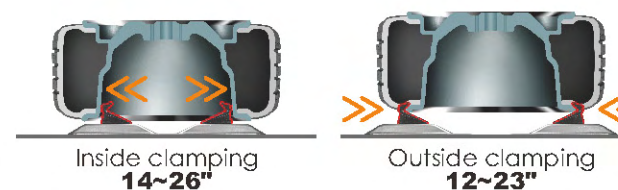


STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(037B help arm)	1550*310*550mm(3.8*1.0*1.8 ft)
N/G weight(main body)	240/268 kg (528/590 lbs)
N/G weight(037B help arm)	90/104 kg (198/229lbs)
N/G weight(total)	330/372 kg(726/818 lbs)



PL-1256J

HIGHER CLASS SERIES 2 years warranty

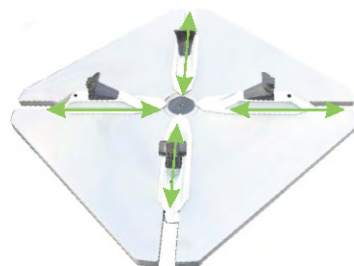

Max working clamping 26"



- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Automatic mount/demount head: no lever technology
- * Clamping jaws are totally one step die casting



INDEPENDENT 056 HELP ARM SYSTEM

- * Curved & unique design 360° rotary tyre pressing help arm.
- * Central positioning function : make rim and tyre detached & clamp jaws quickly and conveniently.
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

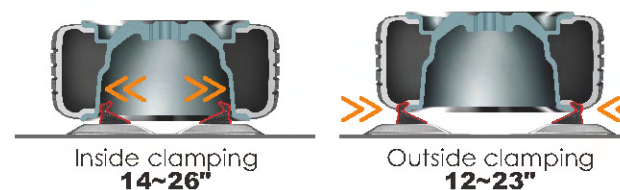


STANDARD PARTS




SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(056 help arm)	1230*450*350mm(4*1.5*1 ft)
N/G weight	285/330 kg(628/728 lbs)



PL-1256ITJ

HIGHER CLASS SERIES 2 years warranty

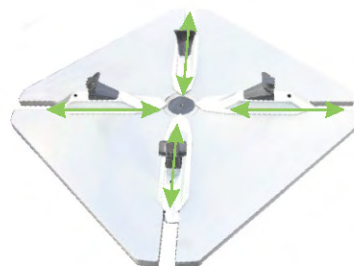

Max working
clamping 26"



- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Automatic mount/demount head: no lever technology
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres




INDEPENDENT 056 HELP ARM SYSTEM

- * Curved & unique design 360° rotary tyre pressing help arm.
- * Central positioning function : make rim and tyre detached & clamp jaws quickly and conveniently.
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE

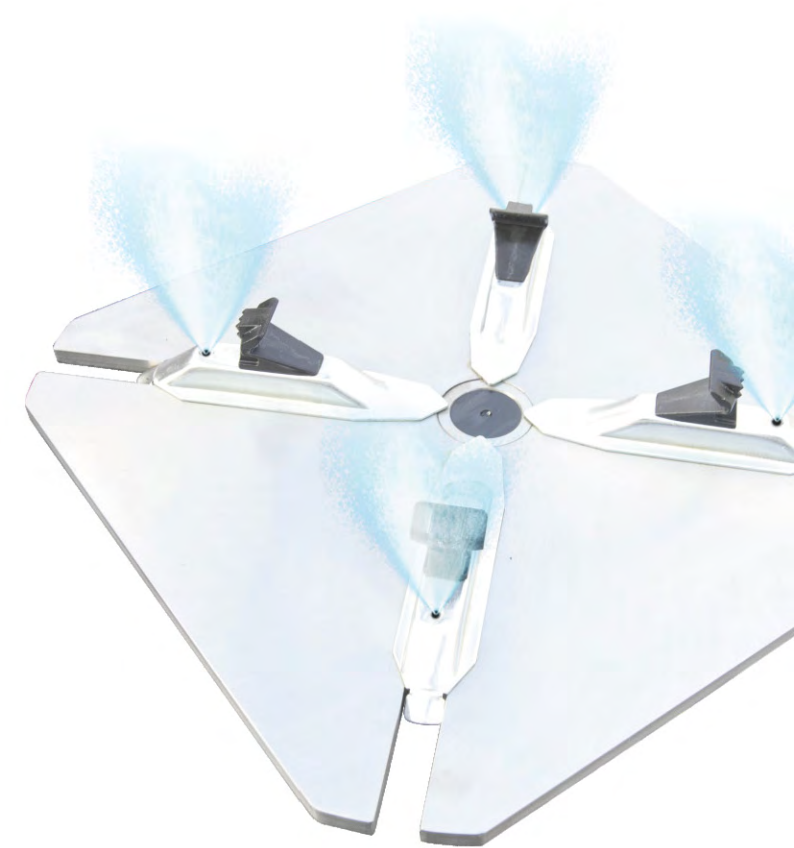


RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength

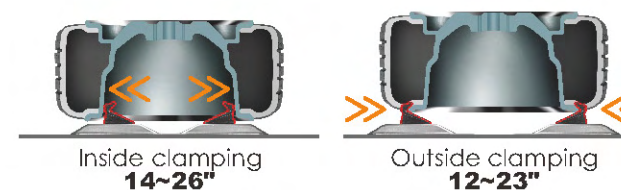


STANDARD PARTS

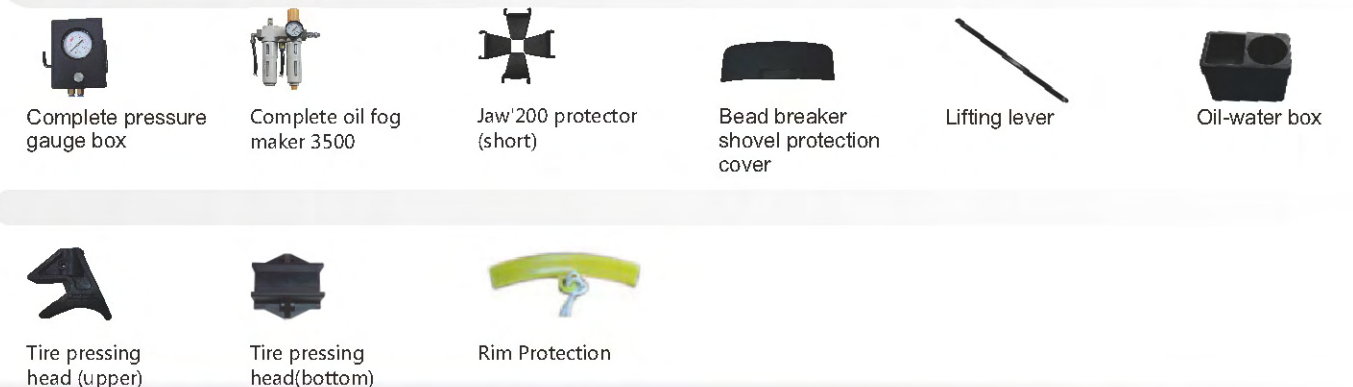

SPECIFICATIONS

Working pressure	8-10bar (116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Motor power	0.55/0.75/1.1 kw
Dimension(056 help arm)	1550*310*550mm(3.8*1.0*1.8 ft)
N/G weight(total)	363/395kg kg(800.3/870.8 lbs)




PL-1239

HIGHER CLASS SERIES 2 years warranty

- * High resolution camera and 8" VGA LCD visualization system lets operator to monitor and control tyre demounting operation. Imported hydraulic pump station and reverse switch.




- * Pneumatic tyre lifter ,save man-power.
- * Full automatic operation control and clamping rim size 10"-30" are specially suitable for big size tyres, explosion-proof tyre, low profile tire ,RV tyres and big vacuum tyres.
- * 360° rotary tyre pressing help arm.
- * Full-automatic hydraulic 360° rotary steel tyre demounting hook can demount tyre without lever.



SPECIFICATIONS

Rim dimensions	10"~ 30"
Working pressure	8-10bar (116-145 psi)
Hydraulic pressure	100bar
Optional rotating motor power supply	220v (1ph/3ph)/380v(3ph)
Optional pump power motor power supply	220v (3ph)/380v(3ph)
Rotating motor power	0.75/1.1 kw
Pump power	1.5 kw
Bead breaker force	1400kg
N/G weight	573/660 kg(1260.6/1452 lbs)



PL-1239P

HIGHER CLASS SERIES 2 years warranty

- * High resolution camera and 8" VGA LCD visualization system lets operator to monitor and control tyre demounting operation. Imported hydraulic pump station and reverse switch.




- * Full hydraulic combiner pressing disk and nylon pressing roller make tyre and rim detached instantly.
- * Full automatic operation control and clamping rim size 10"-30" are specially suitable for big size tyres, explosion-proof tyre, low profile tire ,RV tyres and big vacuum tyres.
- * 360° rotary tyre pressing help arm.
- * Full-automatic hydraulic 360° rotary steel tyre demounting hook can demount tyre without lever.



SPECIFICATIONS

Rim dimensions	10"~ 30"
Working pressure	8-10bar (116-145 psi)
Hydraulic pressure	100bar
Optional rotating motor power supply	220v (1ph/3ph)/380v(3ph)
Optional pump power motor power supply	220v (3ph)/380v(3ph)
Rotating motor power	0.75/1.1 kw
Pump power	1.5 kw
Bead breaker force	1400kg
N/G weight	573/660 kg(1260.6/1452 lbs)



PL-1259

HIGHER CLASS SERIES 2 years warranty

- * Pneumatic control vertical arm rise & fall, easy operation
- * Pneumatic control demount/mount head, with "no lever" technology, even more performing, even more ingenious
- * Automatic central positioning & locking flange workbench for vehicle, SUV and commercial vehicles wheels up to 30".



- * Full pneumatic control to press the edge of both up & down tire beads, quickly and easily to separate tire bead and rim
- * Big working scope from 10"-30", special suitable for big size tyres, anti-flat tyres and big vacuum tyres
- * Unique design 360° rotary tyre pressing help arm



85

PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE




- * Left side pneumatic tyre lifter to help easy lift up & unloading the tyres, save man-power.
- * Full automatic operation.



SPECIFICATIONS

Rim dimensions	10"~ 30"
Working pressure	8-10bar (116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	1.1 kw
Bead breaker force	760kg (2kbf)
N/G weight	480/500 kg(1058/1102 lbs)



86

01



Complete inflating gun

02



Digital inflating gun

03



Complete pressure gauge box

04



Digital pressure gauge box

05



Complete oil fog maker 3500

06



Complete oil fog maker 2000

07



Jaw 200

08



Jaw 600

09



Jaw'200 protector(short)

10



Jaw'200 protector(long)

11



Mount/demount head protector 3#

12



Mount/demount head protector 7# & 8#

13



Complete Mount/demount head B03#

14



Complete mount/demount head 7#

15



Complete Mount/demount head 8#

16



Complete mount/demount head plastic 5#

17



Complete mount / demount head motorcycle

18



T01 Automatic mount/demount head Protector

19



Complete Tyre pressing roller

20



Complete Rotating valve 600

21



Complete Rotating valve (A)

22



Complete Rotating valve

23



Complete quick release nut (tyre changer)

24



Cones set (tyre changer)

25



Motorcycle adaptor of tire changer

26



Tire pressing head (upper)

27



Tire pressing head(bottom)

28



Tire lifting roller head

29



Bead breaker shovel protection cover

30



Lifting lever

31



Oil-water box

32



Bead pressing tool

33



Complete pneumatic locking switch

34



Complete gear box

35



Complete bead breaker cylinder D186

36



Complete bead breaker cylinder D200

37



Rim Protection

38



Air booster

39



Complete 5-way valve (T-union)

40



Complete 5-way valve(tilting)

41



Complete 5-way valve(inflating)

42



Complete 5-way valve(L-union)

44



Reverse switch pedal (sliver)

45



5-way valve pedal(sliver,right)

46



5-way valve pedal(black,right)

47



Reverse switch pedal (black)

48



5-way valve pedal(black,left)