



PL-R100



PL-R200



PL-R210



PL-Q40



PL-Q80

Tire Repair Cabinet & Beehive Port Cabinet

MODEL	PL-R100	PL-R200	PL-R210	PL-Q40	PL-Q80
N.W/G.W.	18/22KG	115/150KG	59/74KG	60/62KG	68/70KG
PRODUCT SIZE	150X69X205CM	150X69X205CM	107X57X58CM	/	/
PACKAGE SIZE	42X28X117CM	152X75X41CM	102X56X41CM	62X62X14CM	139X41X41CM

SPECIFICATIONS



PL-C300



PL-C320



PL-C500



PL-C600



PL-C005



PL-C006



PL-C310



PL-C330



PL-C700



PL-C800



PL-C007



PL-C008

Tool Cabinet

MODEL	PL-C300	PL-C310	PL-C320	PL-C330	PL-C500	PL-C600	PL-C700	PL-C800	PL-C005	PL-C006	PL-C007	PL-C008
N.W/G.W.	11/12KG	14.5/17.5KG	40/42KG	41/43KG	48.3/50.3KG	51.5/53.5KG	54/56KG	56.3/58.3KG	52.3/54.5KG	55.5/57.7KG	58/60.2KG	60.2/62.2KG
PACKAGE SIZE	71X40.5X23CM	71X40.5X32CM	82.5X51X79CM					82.5x51x85.5CM				

SPECIFICATIONS



PL-CR90002



PL-CR90003



PL-CR90004

Car creeper & Work seat

MODEL	PL-CR90002	PL-CR90003	PL-CR90004
N.W/G.W.	7.2/8.2KG	5.5/6KG	5.7/6.6KG
PRODUCT SIZE	102X42.5X11CM	44X36X36.5CM	38X38X57.5CM
PACKAGE SIZE	104X44X12.5CM	45X36.5X24CM	40X40X16CM
QTY/20' CY	465	690	1120

SPECIFICATIONS



GARAGE EQUIPMENTS





Boottle Jack							SPECIFICATIONS	
MODEL	PL-JB90201	PL-JB90301	PL-JB90401	PL-JB90501	PL-JB90601	PL-JB90801	PL-JB91001	PL-JB91201
CAPACITY	2.0T	3.0T	4.0T	5.0T	6.0T	8.0T	10T	12T
MIN. H	158MM	195MM	180MM	197MM	197MM	205MM	205MM	215MM
MAX. H	308MM	380MM	350MM	382MM	382MM	390MM	390MM	400MM
LIFTING. H	90MM	125MM	110MM	125MM	125MM	125MM	125MM	125MM
ADJUST. H	60MM	60MM	60MM	60MM	60MM	60MM	60MM	60MM
N.W/G.W.	2.2/24KG	3.1/27KG	3.2/27KG	4.1/27KG	4.1/27KG	4.9/27KG	5.5/24KG	6.5/14.5KG



Boottle Jack					SPECIFICATIONS	
MODEL	PL-JB91501	PL-JB91601	PL-JB92001	PL-JB93001	PL-JB93201	PL-JB95001
CAPACITY	15T	16T	20T	30T	32T	50T
MIN. H	225MM	225MM	244MM	285MM	285MM	300MM
MAX. H	425MM	425MM	449MM	465MM	465MM	480MM
LIFTING. H	140MM	140MM	145MM	180MM	180MM	180MM
ADJUST. H	60MM	60MM	60MM	/	/	/
N.W/G.W.	7.6/16.5KG	7.6/16.5KG	9.9/22KG	13.4/30KG	22/23KG	30/31KG



SPECIFICATIONS					
MODEL	LIFTING WT	MIN. H	MAX. H	PACKAGE SIZE	GR WT/C
PL-JS90201	2T	273MM	430MM	18X19.5X34.5CM	5.1/5.4KG
PL-JS90301	3T	260MM	435MM	21X18X33CM	5.5/6.0KG
PL-JS90601	6T	370MM	610MM	43X28.5X25CM	10/11KG



Floor Jack					SPECIFICATIONS	
MODEL	PL-JF90201	PL-JF90202	PL-JF90203	PL-JF90204	PL-JF90206	PL-JF90301
CAPACITY	2.0T	2.0T	2.0T	2.0T	2.25T	3.0T
MIN. H	125MM	125MM	135MM	135MM	135MM	85MM
MAX. H	300MM	300MM	335MM	335MM	495MM	485MM
LIFTING. H	175MM	175MM	200MM	200MM	360MM	400MM
N.W/G.W.	6.5/7.5KG	6.5/7.0KG	8.5/9.5KG	8.5/9.0KG	31/33KG	34/36KG



SPECIFICATIONS						
MODEL	S25-2J	S30-2JL	S30-2JH	S40-2J	S40-2JL	S40-2JLH
CAPACITY	25T/10T	30T/15T	30T/15T	40T/20T	40T/20T	40T/20T
MIN. H	185MM	170MM	210MM	190MM	170MM	210MM
LIFTING. H	25T:97MM	30T:86MM	30T:126MM	40T:106MM	40T:88MM	40T:126MM
	10T:95MM	15T:83MM	15T:111MM	20T:88MM	20T:81MM	20T:108MM
EXTERSION. H	75+45MM	75+45MM	75+45MM	75+45MM	75+45MM	75+45MM
N.W/G.W.	53/56KG	47/49KG	50/53KG	62/65KG	53/56KG	56/59KG



SPECIFICATIONS					
MODEL	S50-2J	S50-3J	S60-2J	S60-3J	S80-2J
CAPACITY	50T/25T	50T/25T/10T	60T/40T	60T/40T/20T	80T/50T
MIN. H	215MM	160MM	220MM	175MM	230MM
LIFTING. H	50T:115MM 25T:114MM	50T:62MM 25T:61MM 10T:69MM	60T:121MM 40T:119MM	60T:82MM 40T:81MM 20T:84MM	80T:111MM 50T:204MM
EXTERSION. H	75+45MM	75+45MM	75+45MM	75+45MM	75+45MM
N.W/G.W.	73/76KG	61/64KG	85/88KG	73/76KG	106/109KG



Engine Crane					
SPECIFICATIONS					
MODEL	PL-EC90101	PL-EC90201	PL-EC90202	PL-EC90103	PL-EC90203
LIFTING WT	1.0T	2.0T	2.0T	1000lbs	2000lbs
LIFTING. H	2000MM	2000MM	2000MM	1800MM	1800MM
N.W/G.W.	70/74KG	75/78KG	90/96KG	48/50KG	63/65KG



Engine Stand				
SPECIFICATIONS				
MODEL	PL-ES90101	PL-ES90102	PL-ES90103	PL-ES90104
LIFTING WT	750LBS	1000LBS	1250LBS	2000LBS
LIFTING. H	780MM	780MM	820MM	810MM
N.W/G.W.	19/20KG	22/23KG	25/26KG	38/40KG



Low Transmission Jack					
SPECIFICATIONS					
MODEL	PL-EL90101	PL-EL90102	PL-EL90103	PL-EL90104	PL-EL90105
CAPACITY	0.5T	1.0T	1.5T	2T	3T
MIN. H	190MM	200MM	230MM	210MM	120MM
MAX. H	780MM	760MM	890MM	960MM	880MM
N.W/G.W.	40/47KG	60/68KG	84/92KG	128/135KG	95/105KG



High Transmission Jack						
specification						
MODEL	CAPACITY	MIN. H	MAX. H	STROKE		GR WT
				1ST STAGE	2ND STAGE	
PL-EH90101	0.5T	1100MM	1900MM	/	/	32KG
PL-EH90102	0.5T	1200MM	2000MM	/	/	40.5KG
PL-EH90103	0.5T	870MM	1800MM	465MM	465MM	86KG
PL-EH90104	0.5T	850MM	1750MM	450MM	450MM	68KG



Shop Press						
SPECIFICATIONS						
MODEL	PL-PS91001	PL-PS92001	PL-PS92002	PL-PS93001	PL-PS94001	PL-PS95001
CAPACITY	10T	20T	20T	30T	40T	50T
WORKING RANGE	90-858MM	80-1080MM	0-955MM	130-820MM	100-885MM	100-885MM
STROKE	135MM	145MM	190MM	150MM	235MM	235MM
N.W/G.W.	70/72KG	70/72KG	90/92KG	129/142KG	220/250KG	235/267KG



Motorcycle Lift Jack					
SPECIFICATIONS					
MODEL	PL-ML90101	PL-ML90105	PL-ML90104	PL-ML90106	PL-MS90101
CAPACITY	1500LBS	1100LBS	CAPACITY	1500LBS	CAPACITY:400KG
MIN. H	120MM	95MM	MIN. W	1055MM	Height:400MM
MAX. H	387MM	375MM	MAX. W	1282MM	Width:260-360MM
N.W/G.W.	28/30KG	14/15KG	N.W/G.W.	28/30KG	N.W/G.W.:4.5/5.0KG

Tyre Equipments



PL-C1100S



PL-C1300A



PL-C1200A



PL-C1400A

Bead Booster

MODEL	PL-C1100S	PL-C1300A	PL-C1200A	PL-C1400A
CAPACITY	24 L	20 L	20 L	38 L
PACKAGE SIZE	56X46X50CM	45X40X33CM	48X40X33CM	60X38X40CM
N.W/G.W.	15/16KG	10.5/11.5KG	4/4.5KG	14/14.5KG

SPECIFICATIONS



PL-JD90101



PL-JD90102



PL-JD90103



PL-JD90104

Vulcanizing Machine

MODEL	PL-JD90101	PL-JD90102	PL-JD90103	PL-JD90104
INPUT POWER	2X450W	2X500W	2X500W	500W
TEMPERATURE RANGE	0-300°C	145°C-165°C	145°C-165°C	145°C-165°C
REPAIR AREA	80X70MM ²	100X80MM ²	100X80MM ²	60X80MM ²
N.W/G.W.	64/66KG	43.3/46.4KG	10/11KG	7.9/8.3KG

SPECIFICATIONS



PL-001



PL-703

High Precision Digital Inflatable Gun

Model	MEASURING RANGE	ACCURACY	PACKAGE SIZE	GR WT/C
PL-001	-3.5~-15pSi +0.35~250Psi	0.1Psi (20°C~30°C)	29.6X18X10.6CM	0.59/0.84KG
PL-703	+0.35~250Psi	0.1Psi (20°C~30°C)	28.8X12.7X0.96CM	0.51/0.69KG

SPECIFICATIONS

Air operated truck Tire spreader PL-S825



Air pressure:8-12KG/CM²
Package size :126X96X83cm
N.W/G.W.:95/125KG

Air operated truck Tire spreader PL-S275



Air pressure:8-10KG/CM²
Package size :57X57X103cm
N.W/G.W.:47/52KG

Portable air operated tire spreader PL-A275



Air pressure:6-8kg/cm²
Package size :45X10X26cm
N.W/G.W.:6.5/7KG

Car tire test tanks PL-T820



Air pressure:6-8kg/cm²
Package size :110X112X67cm
N.W/G.W.:90/127KG

Wheel dolly PL-T300A




Lifting WT:300LB
Package size :82X58X18cm
N.W/G.W.:12/14KG

Wheel dolly PL-T500




Lifting WT:1T
Package size :116X90X16cm
N.W/G.W.:68/75KG

Tire carrier dolly PL-T250



Package size :182X66X12cm
N.W/G.W.:44.5/50KG



Mobile Tire & Wheel Lift PL-LM200



MAX L.H
1200MM
APPLY TO TIRE
65KG

Air pressure :8~10kg/cm²
Package size:1020X470X270cm
N.W/G.W.:48/66KG

Mobile Tire & Wheel Lift PL-LM470



MAX L.H
700MM
APPLY TO TIRE
500KG

Air pressure :8~10kg/cm²
Package size:1020X420X310cm
N.W/G.W.:75/84KG

Air operated truck Tire spreader PL-M275



Air pressure:8-10KG/CM²
Package size :81X31X31cm
N.W/G.W.:21/23KG

Manual desk tire spreader PL-MB275



Package size :66X16X22cm
N.W/G.W.:7.5/8KG

Truck tire test tanks PL-T1350




Air pressure:6-12kg/cm²
Package size :76X152X93cm
N.W/G.W.:245/280KG

Wheel dolly PL-T300



Lifting WT:300LB
Package size :82X58X18cm
N.W/G.W.:8/10KG

Bead breaker PL-C1000



Suit For 17.5" to 24.5" Rims
Qty/Carton 2set/3carton
N.W/G.W.:32/34KG

Tire carrier dolly PL-T400



Stack H.:150cm
Package size:150X64X24cm
N.W/G.W.:17/21KG

Mobile Tire & Wheel Lift PL-LM100C



MAX L.H
830MM
APPLY TO TIRE
65KG


Air pressure :8~10kg/cm²
Package size:1060X310X230cm
N.W/G.W.:61/70KG

Mobile Tire & Wheel Lift PL-LM120



MAX L.H
1200MM
APPLY TO TIRE
85KG

Air pressure :8~10kg/cm²
Package size:1425X305X235cm
N.W/G.W.:70/81KG

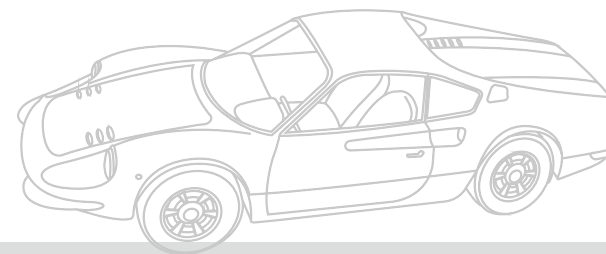

Tyre Equipments



PL-C1000
Bead Breaker

Suit For 17.5" to 24.5" Rims
N.W/G.W 32/34KG
Qty/Carton 2set/3carton
Package size 123*26*12CM
41*35*27CM
41*35*27CM



PL-C1200
Bead Breaker

Suit For any 20", 22.5" & 24.5"
tube & tubeless truck tires up to 13" wide
N.W/G.W 24/25KG
Qty/Carton 2set
Package size 140.5*27*28.5CM



PL-C1300
Bead Breaker

Suit For 17.5" to 24.5" Rims
N.W/G.W 28/30KG
Qty/Carton 2set
Package size 140.5*27*28.5CM



PL-C1400
Bead Breaker

Suit For 17.5" to 24.5" Rims
N.W/G.W 27/29KG
Qty/Carton 2set
Package size 52*38*70CM



PL-C1500
Slide hammer

The slide hammer wedge is forced between the
bead and rim flange. Anspring action reduces
slide hammer kickback.
N.W/G.W 24/25KG
Qty/Carton 2set
Package size 130*14*7CM



PL-C1600
Mount / Demount tool set

Mount/Demount tool set
Suit for most truck tire
N.W/G.W 85KG/90KG
Qty/carton 10set/2carton
Package size 109*17*28CM



PL-C1600C
Mount / Demount tool set

Suit For most truck tire
N.W/G.W 90KG/95KG
Qty/carton 10set/2carton
Package size 109*17*28CM
88*17*28CM



PL-C1700
Mount / Demount tool set

Suit For most truck tire
N.W/G.W 40/42KG
Qty/carton 20pcs
Package size 88*17*28CM



PL-C1800
Tyre layering extractor

Suit For most tube tire of truck
N.W/G.W 45/46KG
Qty/Carton 10set
Package size 109*17*28CM

Air Compressor

2.2 KW
3HP
Generator

100L
26.4 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLV2070-FJ

3 KW
4HP
Generator

130L
34.3 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLV3070-FK

4 KW
5HP
Generator

135L
35.6 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLV2085-FL

5.5 KW
7.5HP
Generator

175L
46.2 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLV2095-FM

7.5 KW
10HP
Generator

225L
59.4 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW3085-FN

7.5 KW
10HP
Generator

225L
59.4 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW3090-FO

7.5 KW
10HP
Generator

270L
71.3 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW3095-FP

11 KW
15HP
Generator

350L
92.5 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW30100-FQ

2.2 KW
3HP
Generator

150L
39.6 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLV70150-DF

3 KW
4HP
Generator

200L
52.8 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW70250-DI

4 KW
5HP
Generator

250L
66 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLV85250-DG

5.5 KW
7.5HP
Generator

250L
66 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLV95250-DH

7.5 KW
10HP
Generator

300L
79.2 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW85300DJ

7.5 KW
10HP
Generator

300L
79.2 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW90300DL

7.5 KW
10HP
Generator

300L
79.2 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW95300DX

11 KW
15HP
Generator

400L
105.6 lbs
Storage Volume

0.8 MPA
116 PSI
Max.working
pressure

PLW100400DY

Wheel Weights

FE STICK

60G
5G*4+10G*4

FE-129

60G
5G*12

FE-139

30Z
1/4OZ*12

FE-359

30Z
1/2OZ*12

FE-399

FE-239

60G
5G*4+10G*4

SILVER

GOLDEN

COMMON

FOR ALLOY RIM

FE-319B

FOR STEEL RIM

FE-329B

ZN STICK

60G
5G*12

ZN-519

FOR ALLOY RIM

ZN-179

FOR STEEL RIM

ZN-189B

Wheel Weights

PB STICK

FOR ALLOY RIM

PB-529

FOR HEAVY TRUCK

PB-559

FOR STEEL RIM

FE-539

PB-889

AMERICAN & CANADIAN STYLE

FOR ALLOY RIM

FOR AMERICAN CAR
LEAD-P179
0.25-2 OZ



FOR AMERICAN CAR
LEAD-MC179
0.25-2 OZ



FOR GERMANY CAR
IN AMERICAN MARKET
LEAD-IAW179
5-60 G



FOR JAPANESE CAR
LEAD-FN179
5-60 G



60G
5G*12

PB-219

60Z
1/2OZ*12

PB-269

60G
5G*4+10G*4

PB-299

100G
20G*5

PB-469

200G
20G*10

PB-569

30Z
1/4OZ*12

PB-259

60Z
1OZ*6

PB-279

100G
25G*4

PB-369

180G
5G*6+25G*6

PB-489

200G
50G*4

PB-669