



GUANGZHOU JINGJIA AUTO EQUIPMENT CO., LTD

Tel: 86-20-36747082/36350276/86274320/86274345

Fax: 86-20-36747055/36350987

Http://www.chinapuli.com E-mail: export@chinapuli.com



THE COMPANY PROFILE


Over the last 20 years R&D and manufacturing experience of tyre changers, wheel balancers and wheel alignment equipments, we have been always concentrating on continuous pursuit of quality excellence and technological innovation, ensuring all the machines are produced under dedicated workmanship, international standards and strictly quality control. We always work hard to meet customers' needs by providing high cost-effective, competitive products and enthusiastic, considerate service.

Due to the trust and support from customers, we have grown to be the leading manufacturer in this industry, with total 50,000 m² working plants and monthly outputs of 6,000 pcs tyre service equipments, our products have been

exported to over 60 countries and have gained some good reputation from the customers and end-users.





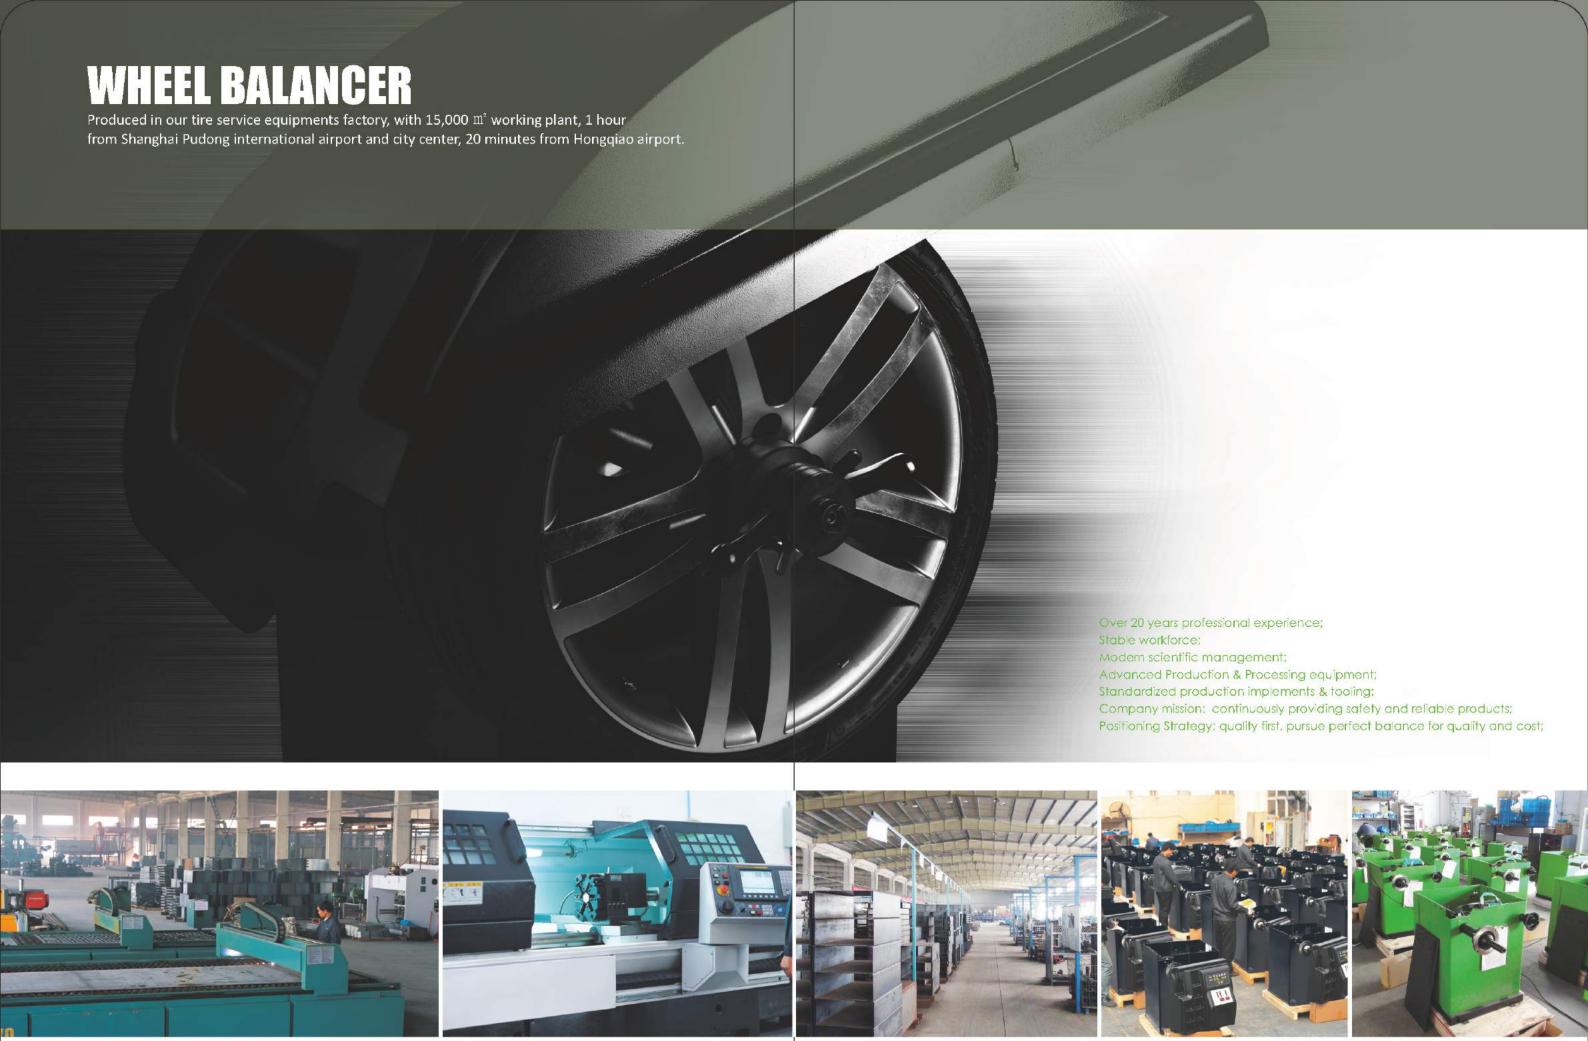

GROWTH HISTORY





2005

Expanded production base in Shanghai City, covers 15,000 m² in size



1998-2004

Production base of Lubrication and gas system increased to 8,000 m² in Guangzhou City.

Add another two separate production lines of oil lubrication system and gas inflation system equipment

2008



1995 Started to produce t equipment in china

Started to produce tire

Add lifts production line, expanded production base in Qidong City, complete the 1st phase 20,000 m² for lift equipments





2009

Add production line of A/C machine and fuel injector machines in Guangzhou City. Complete the 2nd phase 20,000 m² for tire service equipments in Qidong City.



2007

Created PULI brand for oversea markets of exportation purpose



2017

42000m² factory for tyre changers, wheel balancers & Lifts



2014

Launch SAP B1 management system



2013

Become a mid-Size company and leading player in automotive service industry, with totally 700 employees, 7 individual companies and 5 production bases located in Shanghai, Qidong and Guangzhou City



2012

Start 3rd phase of Qidong working plant project



Monthly outputs reach to 6,000pcs for tyre service equipments

DIJI UNITED TO EXPLORE! 战的特徵系作李响轨通清符

	TYRE CHANGER	01~02
LIOT	PL-1211	03~04
III W	BI 1200	
		05~06
ZD	PL-1256	07~08
	PL-1256IT	09~10
Title Control	WHEEL BALANCER	11~12
0		
≥	PL-1823	12
PROMOTION	PL-1828	13
<u>~</u>	PL-1897	14~16
100	ALL IN ONE	1 1 10
8	PL-1200M	17~18
	PL-1206M	19~20
	PL-1260	21
	PL-1261	22
YEAR WARRANTY		77.77 °°
All the Control of th	PL-1206	23
	PL-1200	24
	PL-1201	25
	PL-1201∏	26
18		
CHANGER	PL-1221	27
ž	PL-1221IT	28
I₹I	PL-1226	29~30
I	PL-1226IT	31~32
O		
TYRE	PL-1227	33~34
5	PL-1227IT	35~36
	PL-1228	37~38
	TRUCK TYRE CHANGER	39
	BL 2002	100000
	PL-2900	40
	PL-2960	41
A .	PL-2980	42
	PL-3008	
	1 2 3000	43~44
	DI 1202	45
	PL-1203	45
VEADE IAIA DE ANEXE	PL-1203IT	46
YEARS WARRANTY	PL-1209	47~48
	PL-1209IT	49~50
		51~52
	PL-1291	
	PL-1291IT	53~54
	PL-1292	55~56
	PL-1592	57~58
	PL-1298IT	59~60
	내일 하지 않았는데 있었다. 이 그는 그를 가는 그를	
NGER	PL-1598IT	61~62
ਰ	PL-1297IT	63~64
Ž	PL-1293IT	65~66
4	PL-1295	67~68
TYRE CH.		
<u> </u>	PL-1231	69
₩	PL-1231IT	70
	PL-1236	71~72
	PL-1236IT	73~74
	DI 1227	
		75~76
	PL-1237IT	77~78
	PL-1256J	79~80
	PL-1256ITJ	81~82
	PL-1239	83
	_,	
	Pl-1239P	84
0	PL-1259	85~86
	TIRE CHANGER SPARE PARTS	87~88
	PL-1108	89
	PL-1109	90
YEAR WARRANTY		
	PL-1110	91
	PL-1150	92
	PL-1152	93
oc.	PL-1100	94
BALANCER		
¥	PL-1120	95
á	TRUCK WHEEL BALANCER	
	PL-1500	n.c
. ₹	DI 1050	96
	PL-1850	97
曲	DI 1800	
	PL-1800	98
VEADS WADDANTS	PL-1820	99
YEARS WARRANTY	PL-1821	100
	PL-1824	
	PL-1829	101
		102
ϕ	WHEEL BALANCER SPARE PARTS	103~104





HIGHER CLASS SERIES 1 year warranty




Max working clamping 24"





RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Force down the pressing roller behind the mount/demount head, keep 2-3mm between mount/demount head with tire rim, preventing mount/demount head
- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim







Digital inflating gun



Complete oil fog maker 2000 (short)



Jaw'200 protector



Mount/demount head protector 3#



Complete Tyre Bead breaker pressing roller shovel protection cover



Oil-water box

Bead pressing



Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 207/229 kg(455/504 lbs)






PL-1298IT

HIGHER CLASS SERIES 2 years warranty

* Pneumatic locking device between vertical arm

and 098 help arm, patent unique function make

the locking operation extremely easy




Max working clamping 28"







RIM CLAMPING METHOD 28" enlarged turntable and high power motor, which increase working strength



Outside clamping 12~26"



009 MULTI-FUNCTION LEFT HELP ARM

- *360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- *Central positioning function which can make wheel and turntable homocentric
- *Function of lifting tire makes it easily to raise the low profile tires









INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS



Tire lifting

roller head

Complete pressure gauge box



Complete oil fog maker 3500

Bead breaker

cover

shovel protection



Jaw'200 protector (short)



head protector 8#

Oil-water box



Complete Tyre pressing roller



Tire pressing



head (upper) head(bottom)



Bead pressing tool



SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight


8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 254/310 kg (559/682 lbs)

Lifting lever





HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"





INDEPENDENT 056 HELP ARM SYSTEM

* Curved & unique design 360° rotary tyre pressing help arm.

07

- * Central positioning function: make rim and tyre detached & clamp jaws quickly and
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE




RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"



Complete oil fog



Jaw 200 protector (short)



Mount/demount head protector 7#



Bead breaker shovel protection cover



Tire pressing

head (upper)

Tire pressing

head(bottom)

maker 3500



Oil-water box

Rim Protection

08

SPECIFICATIONS

Working pressure Optional power supply Optional motor power Dimension(056 help arm) N/G weight


8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1230*450*350mm(4*1.5*1 ft) 285/330 kg(628/728 lbs)





PL-1256IT

HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"







INDEPENDENT 056 HELP ARM SYSTEM

- * Curved & unique design 360° rotary tyre pressing help arm.
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently.
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE




RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Jaw' 200 protector (short)



Mount/demount head protector 7#



Bead breaker shovel protection cover



Tire pressing head (upper)



Tire pressing head(bottom)



Oil-water box



Rim Protection

SPECIFICATIONS

Working pressure Optional power supply Optional motor power Dimension(056 help arm) N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1230*450*350mm(4*1.5*1 ft) 285/330 kg(628/728 lbs)







HIGHER CLASS SERIES 2 years warranty













passenger cars (Tr36)





Cone (Tr36)











release nut (Tr36)





caliper

shaft(Tr36)



assembly tools





Standard wetights100g

Pressure ring

SPECIFICATIONS

Optional power supply Motor power Balancing speed Balancing accuracy Measuring time N/G weight

0.20/0.37kw 200 r.p.m





PL-1828

HIGHER CLASS SERIES 2 years warranty



OPTIONAL







4-hole adapter for passenger cars (Tr36)

Universal wheel flange (Tr36)

release nut (Tr36)



Cone (Tr36)



Protection hood



Plastic lid











caliper

shaft(Tr36)





assembly tools







Optional power supply Motor power Balancing speed Balancing accuracy Measuring time

200 r.p.m

 $\pm 1g(\pm 0.04 \text{ oz})$





9balancing modes












PL-1897WR


HIGHER CLASS SERIES 2 years warranty









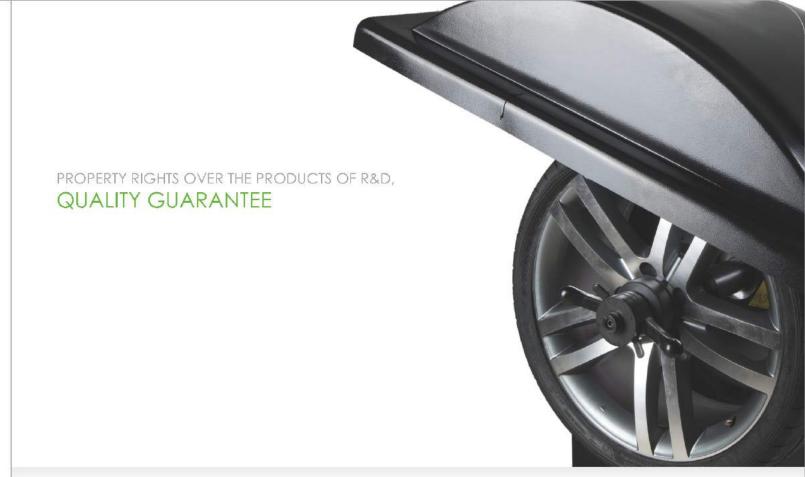

- * Deluxe design. Bigger machine cabinet with thicker material.
- Intelligent error self-test function makes sure the correct use and convenient operations Pneumatic braking system!
- * High accuracy for the balancer, guarantee high quality service
- Easy and safety operation






PL-1200M BASICE CLASS SERIES 1 year warranty

SAVE SPACE

Effective combination of Tyre Changer and Wheel Balancer, save HALF SPACE than the normal operating space

GOOD STABILITY

Wheel balancer effectively use tyre changer weight, prompting more stable in the balancing process

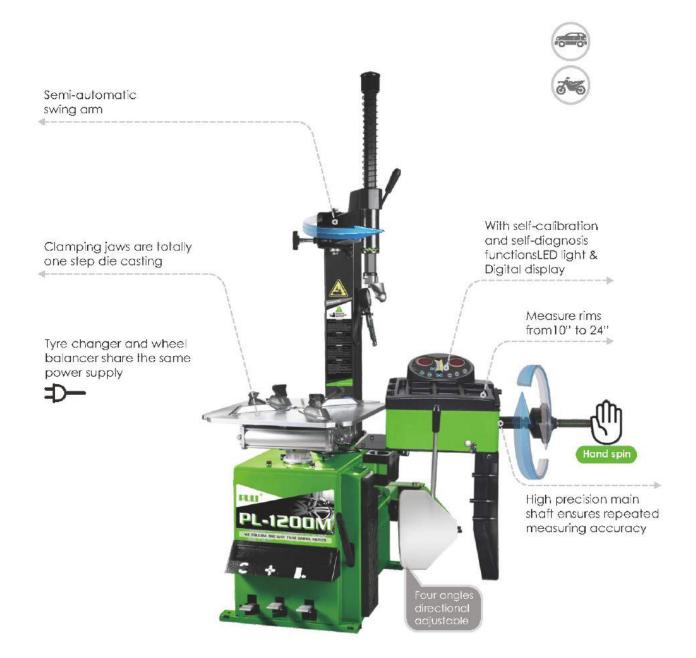

MOUNTING/DEMOUNTING TIRE



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength



clamping 24"



Tyre width

Inside clamping 12~24"

Outside clamping 10~21"

SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 166/198 kg(365.2/418 lbs)

WHEEL BALANCE







SPECIFICATIONS

Optional power supp Balancing speed Balancing accuracy Measuring time N/G weight

Optional power supply 110v (1ph)/ 220v (1/3ph)/ 380v (3ph) Balancing speed 120 r.p.m

 $\pm 1g(\pm 0.04 \text{ oz})$

47/66 kg(103.4/145.2 lbs)

BASIC SERIES 1 year warranty



- * Special design non- central turntable and high power motor, greatly increase work strength
- * Max working clamping 22"




RIM CLAMPING METHOD

22" large turntable and high power motor, which increase working strength



Inside clamping 12~22"



Outside clamping 10~19"

* Manual locking swing arm, convenient and fast * Semi-automatic swing arm * Non-central Clamping jaws are totally one step die casting

STANDARD PARTS



N/G weight

Complete oil fog maker 2000





Oil-water box

SPECIFICATIONS

Working pressure Optional power supply Optional motor power

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 166/188kg(365.2/413.6 lbs)



PL-1261


BASIC SERIES 1 year warranty




* Special design non- central turntable and high power motor, greatly increase work strength

* Max working clamping 24"





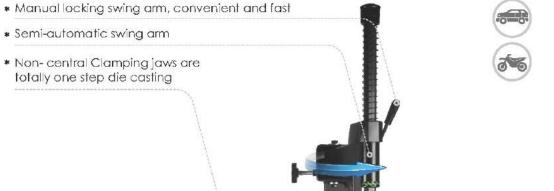



RIM CLAMPING METHOD


24" large turntable and high power motor, which increase working strength





Inside clamping

Outside clamping 10~21"



STANDARD PARTS

12~24"









Lifting lever Oil-water box

SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight

Complete inflating

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 166/188kg(365.2/413.6 lbs)



BASIC SERIES 1 year warranty



* Special motorcycle adaptor is suitable for clamping various motorcycle tyres

* Max working clamping 24"



RIM CLAMPING METHOD

20" large turntable and high power motor, which increase working strength



Outside clamping 6~24"

* Manual locking swing arm, convenient and fast * Semi-automatic swing arm * Clamping jaws are totally one step die casting, low broken rate

STANDARD PARTS



N/G weight

gun

Complete oil fog maker 2000







Oil-water box

SPECIFICATIONS

Working pressure Optional power supply Optional motor power


8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 166/188kg(365.2/413.6 lbs)



PL-1200

BASIC SERIES 1 year warranty

* Manual locking swing arm, convenient and fast




* 24" turntable and high power motor greatly increase work strength

* Max working clamping 24"



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength





Inside clamping 12~24"

Outside clamping 10~21"



STANDARD PARTS







Lifting lever Oil-water box

SPECIFICATIONS


Complete inflating

Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 166/190kg(365.2/418 lbs)



BASIC SERIES 1 year warranty



* Bigger machine body with 24" turntable, greatly increase work strength


* Max working clamping 24"





RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"

* Manual locking swing arm, convenient and fast * Semi-automatic swing arm * Clamping jaws are totally one step die casting, low broken rate

STANDARD PARTS



gun







Oil-water box

SPECIFICATIONS


Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 188/210kg(413.6/462 lbs)




PL-1201IT

BASIC SERIES 1 year warranty



- * Bigger machine body with 24" turntable, greatly increase work strength
- * Max working clamping 24"



- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting, low broken rate
- * Quick air booster, esp. suitable for low profile tyres





RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength





Inside clamping 12~24"

Outside clamping 10~21"



STANDARD PARTS



gauge box





Oil-water box


SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 200/222kg(440/488.4 lbs)



BASIC SERIES 1 year warranty



* Suitable for bigger and wider various new tyres, including some low profile tyres

* Max working clamping 24"



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength



Inside clamping 12~24"



10~21"

* Vertical arm positioning automatically and synchronous pneumatic locked

at any optional position

* Full-automatic pneumatic

tilting column

 Clamping jaws are totally one step die casting





Outside clamping

STANDARD PARTS



Complete oil fog maker 2000



Oil-water box

Complete inflating gun

SPECIFICATIONS


Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 210/234kg(462/514.8 lbs)



PL-1221IT

BASIC SERIES 1 year warranty



- * Suitable for bigger and wider * Clamping jaws are totally various new tyres, including some low profile tyres
- * Max working clamping 24"



* Vertical arm positioning automatically and synchronous pneumatic locked at any optional position

one step die casting

* Quick air booster, esp. suitable for low profile tyres



RIM CLAMPING METHOD

24" large turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"







gauge box







Lifting lever

SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 219/241kg(481.8/530.2 lbs)



IT inflating air tank

BASIC SERIES 1 year warranty



Max working clamping 24"





INDEPENDENT 006 HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.

29

* Central positioning function: make rim and tyre detached& clamp jaws quickly and







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D. QUALITY GUARANTEE



STANDARD PARTS

high power motor, which increase working strength

Inside clamping 12~24"

Outside clamping 10~21"



Digital inflating gun



Lifting lever

Complete oil fog maker 2000



Jaw'200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Tire pressing head(bottom)



Bead breaker shovel protection cover



Oil-water box



Bead pressing




Rim protection

SPECIFICATIONS


N/G weight(total)

Working pressure Optional power supply Optional motor power Dimension(006 help arm) N/G weight(main body) N/G weight(006 help arm) 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1230*450*350mm(4.0*1.5*1.2 ft) 210/234 kg(462/525 lbs) 66/77 kg(145/169 lbs) 276/311 kg(607.2/684.2 lbs)



PL-1226IT

BASIC SERIES 1 year warranty



Max working clamping 24"





INDEPENDENT 006 HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.

31

* Central positioning function: make rim and tyre detached& clamp jaws quickly and







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D. QUALITY GUARANTEE



RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 2000



Jaw'200 protector (short)



Mount/demount

Tire pressing head protector 7# head (upper)







Bead breaker Lifting lever shovel protection cover



Oil-water box



32

Bead pressing



Rim protection

SPECIFICATIONS


N/G weight(total)

Working pressure Optional power supply Optional motor power Dimension(006 help arm) N/G weight(main body) N/G weight(006 help arm)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1230*450*350mm(4.0*1.5*1.2 ft) 229/255 kg(462/525 lbs) 66/77 kg(145/169 lbs) 295/332 kg(649/730.4 lbs)



BASIC SERIES 1 year warranty



Max working clamping 24"





INDEPENDENT 007B HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- * Central positioning function: make rim and tyre detached& clamp jaws quickly and conveniently





PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE




RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"

STANDARD PARTS



Digital inflating gun



Complete oil fog maker 2000



Jaw'200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Tire pressing head(bottom)



shovel protection

Bead breaker

cover





Oil-water box



Rim protection

SPECIFICATIONS

Working pressure Optional power supply Optional motor power Dimension(007 help arm)

N/G weight(main body)
N/G weight(007 help arm)
N/G weight(total)


8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(5.1*1.0*1.8 ft) 210/234 kg(462/515 lbs) 90/104 kg(198/229 lbs)

300/338 kg(660/743 lbs)



PL-1227IT

BASIC SERIES 1 year warranty



Max working clamping 24"





INDEPENDENT 007B HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.

35

* Central positioning function: make rim and tyre detached& clamp jaws quickly and conveniently







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"

STANDARD PARTS



Complete pressure gauge box



Lifting lever

Complete oil fog maker 2000



Jaw'200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Tire pressing head(bottom)



Bead breaker shovel protection cover



Oil-water box



Rim protection


SPECIFICATIONS

N/G weight(total)

Working pressure Optional power supply Optional motor power Dimension(007 help arm) N/G weight(main body) N/G weight(007 help arm) 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(5.1*1.0*1.8 ft) 229/255 kg(504/561 lbs) 90/104 kg(198/229 lbs) 310/359 kg(660/743 lbs)



BASIC SERIES 1 year warranty



Max working clamping 28"





007B+008 DOUBLE HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- Central positioning function: make rim and tyre detached& clamp jaws quickly and conveniently







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE




RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength



Inside clamping 16~28"



Outside clamping 12~26"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Jaw'200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



sing lire pressing per) head(bottom)







Oil-water box




Rim protection

SPECIFICATIONS

Working pressure
Optional power supply
Optional motor power
Dimension(007 help arm)
Dimension(008 help arm)
N/G weight(main body)
N/G weight(total)


8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(5.1*1.0*2.9 ft) 1230*450*350mm(4.0*1.5*1.2 ft) 273/313 kg(598/688 lbs) 428/494 kg(942/1087 lbs)



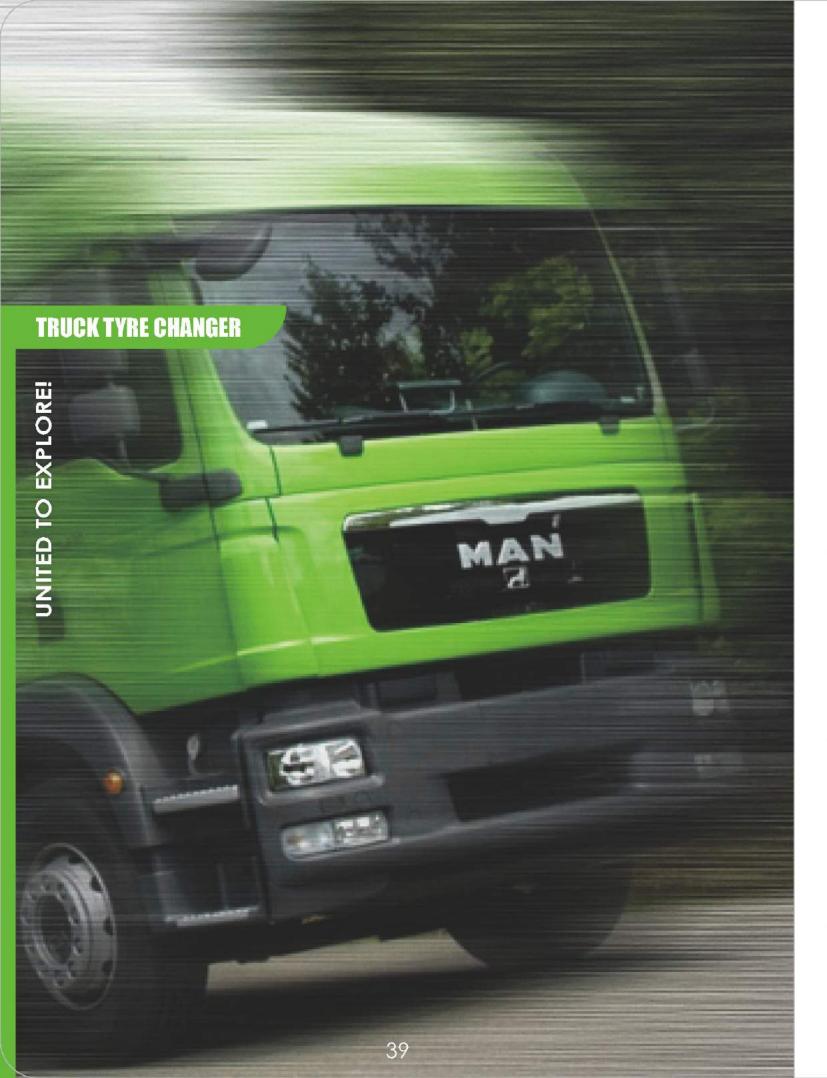

PL-2900 **TRUCK SERIES 1 year warranty**







Max. wheel weight



Maximum tire width & diameter

- * Hydraulic motor with pressure adjustment device.
- * Automatically fast turning.
- * Portable console, double speed of both pump and rotating motor.
- * High performance, maximum safety, absolutely universal application for quickly and convenient to demount/mount various of tyres as bus, truck, camion, etc.
- * Own independent intellectual property rights





rotation of theclamp range

- Electrohydraulic operation.Movable control unit.



STANDARD PARTS



N/G weight

Lubricating pump Bead guide lever



Bead holding device for alloy



SPECIFICATIONS

Hydraulic pump motor Rotating motor Clamping capacity

220v (3ph)/380v(3ph); 1.5kw 220V (3ph)/ 380V (3ph); 2.2kw 14"-26" 520/670kg (1146/1477 lbs)



PL-2960 **TRUCK SERIES 1 year warranty**







Max. wheel weight



Maximum tire width & diameter



 Clockwise and anticlockwise rotation of theclamp range from 14"-42"



- * Electrohydraulic operation.
- * Movable control unit.



- * Automatically fast turning.
- * Portable console, double speed of both pump and rotating motor.
- * High performance, maximum safety, absolutely universal application for quickly and convenient to demount/mount various of tyres as bus, truck, camion, etc.
- * Own independent intellectual property rights











STANDARD PARTS



N/G weight

Lubricating pump Bead guide lever



Bead holding device for alloy rims

tyre lever

41

SPECIFICATIONS

Hydraulic pump motor Rotating motor Clamping capacity

220v (3ph)/380v(3ph); 2.2kw 220V (3ph)/ 380V (3ph); 2.2kw 14"-42"

774/860kg (1706/1896 lbs)



PL-2980

TRUCK SERIES 1 year warranty









Max. wheel weight



Maximum tire width & diameter



Clockwise and anticlockwise rotation of theclamp range from 14"-56"



- * Electrohydraulic operation.
- * Movable control unit

- * Hydraulic motor with pressure adjustment device.
- * Automatically fast turning.
- * Portable console, double speed of both pump and rotating motor.
- * High performance, maximum safety, absolutely universal application for quickly and convenient to demount/mount various of tyres as bus, truck, camion, etc.
- * Own independent intellectual property rights



STANDARD PARTS



N/G weight





Bead holding device for alloy



42

SPECIFICATIONS

Hydraulic pump motor Rotating motor Clamping capacity

220v (3ph)/380v(3ph); 3.0/4.0kw 220V (3ph)/ 380V (3ph); 2.4/3.0kw

14"-56"

960/1080kg (2116/2381 lbs)



RUCK

PL-3008 TRUCK SERIES 1 year warranty






STANDARD PARTS

- * PL-3008 is a movable electro hydraulic tyre changer for truck, bus and tractors
- * PL-3008 be optional equipped with a power generator & air compressor
- ★ The machine can be optional with Italian pump



DIMENSIONS OF VAN'S DOOR

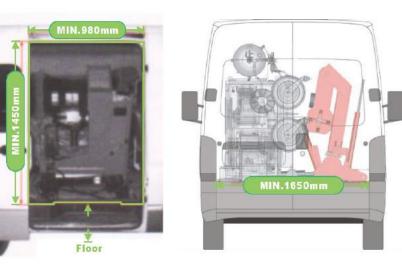



OPTIONAL DEVICE: POWER GENERATOR & AIR COMPRESSOR



MOVABLE TYRE CHANGER+AIR COMPRESSOR

PTIONAL

SPECIFICATIONS OVERALL

N/G weight

768kg / 880kg (1693 / 1940 lbs)

Outside dimension L*W*H(mm) 1680*1080*1650 (5.5*3.5*5.4ft)

STANDARD PARTS & OPTIONAL CONES / SET



Bead holding device for alloy rims Tyre lever



OPTIONAL CONES / SET

SPECIFICATIONS

 Rim dimension
 13"-26"

 Max. wheel diameter
 1300mm(51")

 Max. wheel width
 600mm(24")


 Max. wheel weight
 700kg(1543lbs)

Rotating motor 1.1kw Hydraulic pump motor 1.1kw

Optional power supply 220/400v,1ph/3ph,50/60hz optional N / G weight 508kg / 580kg(1120 / 1279 lbs)



HIGHER CLASS SERIES 2 years warranty



* Manual locking swing arm, convenient and fast

- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting



Max working clamping 26"



RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"



STANDARD PARTS



gun





Lifting lever



Oil-water box

SPECIFICATIONS


Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 212/240kg(466/528 lbs)




PL-1203IT


BASIC SERIES 2 year warranty



Max working clamping 26"










* Quick air booster, esp. suitable for low profile tyres




RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"



STANDARD PARTS



gauge box



Complete oil fog

maker 3500









Oil-water box

SPECIFICATIONS

Complete pressure


Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 215/243kg(473/535 lbs)



HIGHER CLASS SERIES 2 years warranty

* Manual locking swing arm, convenient and fast



clamping 26"





PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



≤406mm (187) ≤1143mm (457)



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



» «

Inside clamping 14~26"

Outside clamping 12~23"

STANDARD PARTS



Digital inflating gun



Complete oil fog maker 3500



Mount/demount head protector 8#



Tire pressing head (upper)



Tire pressing Tire lifting head(bottom) roller head







Lifting lever

N/G weight

Oil-water box

Rim Protection

★ Function of lifting tire makes it easily to raise the low profile tires





*360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting

*Central positioning function which can make wheel and turntable homocentric



SPECIFICATIONS

Working pressure Optional power supply Optional motor power 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 230/258kg(506/568 lbs)




29

009 MULTI-FUNCTION LEFT HELP ARM

tyre, pressing tyre and central positioning.

PL-1209IT

HIGHER CLASS SERIES 2 years warranty



clamping 26"





009 MULTI-FUNCTION LEFT HELP ARM

- *360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- *Central positioning function which can make wheel and turntable homocentric
- *Function of lifting tire makes it easily to raise the low profile tires

31








PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



>>

Inside clamping 14~26"

Outside clamping 12~23"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Mount/demount head protector 8#



Tire pressing head (upper)



Tire pressing head(bottom)





N/G weight



Oil-water box


Rim Protection

SPECIFICATIONS

Working pressure Optional power supply Optional motor power 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 233/261 kg(513/574 lbs)




HIGHER CLASS SERIES 2 years warranty









* Semi-automatic swing arm

* Clamping jaws are totally one step die casting





IT inflating air tank





INTERNATIONAL PATENT

INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS







maker 3500



(short)





Mount/demount

head protector 8#





Oil-water box

Bead pressing tool



Complete Tyre pressing roller



Bead breaker shovel protection cover



Lifting lever



Rim Protection

RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Outside clamping 12~23"

SPECIFICATIONS


Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 241/269 kg (530/592 lbs)



PL-1291IT

HIGHER CLASS SERIES 2 years warranty



clamping 26"









INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS







Complete oil fog maker 3500

Bead breaker

cover

shovel protection



Jaw'200 protector (short)



Mount/demount head protector 8#



Oil-water box



tool



Complete Tyre pressing roller



Lifting lever



Rim Protection

SPECIFICATIONS

Working pressure

Optional power supply Optional motor power N/G weight 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 242/270 kg (532/594 lbs)



35

RIM CLAMPING METHOD


increase working strength

Inside clamping 14~26"

26" enlarged turntable and high power motor, which

Outside clamping 12~23"

HIGHER CLASS SERIES 2 years warranty



clamping 26"

* Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy

* Semi-automatic swing arm

* Clamping jaws are totally one step die casting





RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"





009 MULTI-FUNCTION LEFT HELP ARM

- *360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- *Central positioning function which can make wheel and turntable homocentric
- *Function of lifting tire makes it easily to raise the low profile tires

37










INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE









STANDARD PARTS







maker 3500



(short)









Tire pressing head (upper) head(bottom)

Tire lifting

roller head



Bead breaker

cover

shovel protection



Lifting lever



Oil-water box

head protector 8#



Complete Tyre

pressing roller



Bead pressing

Rim Protection


SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 244/272 kg (538/600 lbs)



BASIC SERIES 1 year warranty



clamping 26"



- * Semi-automatic swing arm
- * Clamping jaws are totally one step die casting





RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength



Inside clamping 14~26"







*360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.

Central positioning function which can make wheel and turntable homocentric Function of lifting tire makes it easily to raise the low profile tires









INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS



gauge box



maker 3500





(short)





Mount/demount

head protector 8#







Complete Tyre pressing roller

head (upper)

head(bottom)





Bead breaker

cover

shovel protection



Jaw'200 protector





Rim Protection



Tire lifting

roller head

Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 254/310 kg (559/682 lbs)




PL-1298IT

HIGHER CLASS SERIES 2 years warranty

* Pneumatic locking device between vertical arm

and 098 help arm, patent unique function make

the locking operation extremely easy



Max working clamping 28"







increase working strength

Outside clamping 12~26"

009 MULTI-FUNCTION LEFT HELP ARM

- *360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- *Central positioning function which can make wheel and turntable homocentric
- *Function of lifting tire makes it easily to raise the low profile tires









INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS



gauge box





(short)





Mount/demount

head protector 8#



Complete Tyre

pressing roller





Tire pressing head (upper)

Tire pressing head(bottom)



Tire lifting

roller head



Bead breaker

cover

shovel protection

maker 3500





Oil-water box





Bead pressing

Rim Protection

SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 254/310 kg (559/682 lbs)



PL-1298IT

HIGHER CLASS SERIES 2 years warranty

* Pneumatic locking device between vertical arm

and 098 help arm, patent unique function make


the locking operation extremely easy

* The round column is used as air tank

one step die casting

* Quick air booster, esp. suitable for low

profile tyres



Max working clamping 28"







Outside clamping 12~26"





- *360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- *Central positioning function which can make wheel and turntable homocentric
- *Function of lifting tire makes it easily to raise the low profile tires











INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Jaw'200 protector (short)



head protector 8#



Complete Tyre pressing roller



Tire pressing head (upper)



Tire pressing head(bottom)



Tire lifting

roller head



Bead breaker shovel protection cover



Lifting lever



Oil-water box



Bead pressing tool



Rim Protection

SPECIFICATIONS


Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 254/310 kg (559/682 lbs)



PL-1598IT

HIGHER CLASS SERIES 2 years warranty



Max working clamping 28"











009 MULTI-FUNCTION LEFT HELP ARM

- *360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- *Central positioning function which can make wheel and turntable homocentric
- *Function of lifting tire makes it easily to raise the low profile tires



Outside clamping 12~26"







INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series







Digital pressure gauge box



Complete oil fog maker 3500



Jaw'200 protector (long)



Mount/demount head protector 8#



Tire pressing head (upper)



Tire pressing head(bottom)





Bead breaker

cover

shovel protection

Lifting lever



Oil-water box



Bead pressing



Complete Tyre




Rim Protection

SPECIFICATIONS


Working pressure Optional power supply Optional motor power Dimension(037 help arm) N/G weight(main body) N/G weight(037 help arm) N/G weight(total)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(3.8*1*1.8 ft) 245/285 kg (540/628 lbs) 90/104 kg (198/229lbs) 335/389 kg(737/856 lbs)



PL-1297IT

HIGHER CLASS SERIES 2 years warranty



Max working clamping 28"







INDEPENDENT 037 LEFT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount / mount tyres.
- * 360° rotary tyre pressing help arm, pressing tyre and central positioning.







INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500

Lifting lever



Jaw'200 protector (short)



Mount/demount head protector 8#



Tire pressing head (upper)



Tire pressing head(bottom)



cover

Bead breaker shovel protection



Oil-water box



Complete Tyre pressing roller



Rim Protection

SPECIFICATIONS

Working pressure
Optional power supply
Optional motor power
Dimension(037 help arm)
N/G weight(main body)
N/G weight(037 help arm)
N/G weight(total)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(3.8*1*1.8 ft) 245/285 kg (540/628 lbs) 90/104 kg (198/229lbs) 335/389 kg(737/856 lbs)





PL-1293IT

HIGHER CLASS SERIES 2 years warranty













 5* plastic demount/mount head, avoiding the metal bird head scratch rims effectively.



* Quick air booster makes the tyre and rim jointed instantly, especially suitable for the low profile tyre.







* Lift side pneumatic tyre lifter to help easy lift up the tyres, save man-power. * Wider and bigger machine cabinet and central positioning flange for 28" rims greatly increase work strength.

■ Max working scope up to 28"!!!



64





INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS



Digital inflating gun



Complete oil fog maker 3500



Complete Mount/ demount head 8#



Mount/demount head protector 8#



Complete Tyre pressing roller



cover

/

Lifting lever

Oil-water box



Bead pressing tool



Complete quick release nut (tyre changer)



Cones set (tyre changer)



et (tyre Rim Protection

SPECIFICATIONS

Rim dimensions Working pressure

Working pressure Optional power supply Optional motor power N/G weight 8"~28" 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 236/260 kg(519/571 lbs)



HIGHER CLASS SERIES 2 years warranty



 Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy

* Semi-automatic swing arm





 5* plastic demount/mount head, avoiding the metal bird head scratch rims effectively.



 Lift side pneumatic tyre lifter to help easy lift up the tyres, save man-power.



- Wider and bigger machine cabinet and central positioning flange for 28" rims greatly increase work strength.
- ★ Max working scope up to 28"!!!



MULTI-FUNCTION LEFT HELP ARM

67

- * 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- * Central positioning function which can make wheel and turntable in ceter position
- * Function of lifting tire makes it easily to raise the low profile tires, no lever to dismount the down bead











INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series





STANDARD PARTS



Digital inflating gun



Complete oil Complete oil for maker 3500 pr



Complete Tyre pressing roller



Tire pressing head (upper)



Tire pressing head(bottom)



Oil-water box

Bead breaker

cover

shovel protection



(tyre changer)

Complete quick Cones se release nut changer)

68





Cones set (tyre Rim Protection

SPECIFICATIONS

Rim dimensions


Working pressure
Optional power supply
Optional motor power
Bead breaker force
N/G weight

8"~28" 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 2500kg

355/325 kg(715/781 lbs)




HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"






* Clamping jaws are totally one step die casting



RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping

12~23"



gun

Complete inflating



Complete oil fog maker 3500



Mount/demount head protector 7#



Lifting lever

Oil-water box

SPECIFICATIONS

Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 228/256kg(473/535 lbs)



PL-1231T

BASIC SERIES 2 year warranty







* Vertical arm positioning automatically and synchronous pneumatic locked at any optional position


* Clamping jaws are totally one step die casting

* Quick air booster, esp. suitable for low profile tyres



RIM CLAMPING METHOD

26" large turntable and high power motor, which increase working strength







Outside clamping 12~23"



STANDARD PARTS



gauge box



Complete oil fog

maker 3500





protector 7#

Mount/demount head





Lifting lever

Oil-water box

SPECIFICATIONS

Complete pressure


Working pressure Optional power supply Optional motor power N/G weight

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 240/268kg(528/590 lbs)



a**i**r tank

HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"





INDEPENDENT 036 RIGHT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm



PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"

STANDARD PARTS



Lifting lever

Digital inflating gun



Complete oil fog maker 3500

Oil-water box



Jaw'200 protector (short)



Mount/demount head protector 7#





head (upper)



Bead pressing



Rim Protection

SPECIFICATIONS

Working pressure Optional power supply Optional motor power Dimension(036 help arm) N/G weight(main body) N/G weight(036 help arm) N/G weight(total)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1230*450*350mm(4.0*1.5*1.1 ft) 228/256 kg (502/563 lbs) 66/77 kg (145/169lbs) 305/333 kg(671/733 lbs)

Bead breaker


cover

shovel protection



PL-1236IT

HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"





INDEPENDENT 036 RIGHT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 3500



Jaw'200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Lifting lever



Oil-water box



Bead breaker shovel protection cover



Bead pressing tool



Rim Protection


SPECIFICATIONS

Working pressure
Optional power supply
Optional motor power
Dimension(036 help arm)
N/G weight(main body)
N/G weight(036 help arm)
N/G weight(total)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1230*450*350mm(4.0*1.5*1.1 ft) 240/268 kg (528/590 lbs) 66/77 kg (145/169lbs) 306/345 kg(673/759 lbs)



HIGHER CLASS SERIES 2 years warranty




clamping 26"

and synchronous pneumatic locked at any optional position * Full-automatic pneumatic

Vertical arm positioning automatically

tilting column * Clamping jaws are totally







INDEPENDENT 037B LEFT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm








PROPERTY RIGHTS OVER THE PRODUCTS OF R&D. QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"



Digital inflating gun



Complete oil fog maker 3500



Jaw'200 protector (short)



Mount/demount head protector 7#



Lifting lever



cover



Tire pressing head(bottom)

Oil-water box

Rim Protection

SPECIFICATIONS


Working pressure Optional power supply Optional motor power Dimension(037B help arm) N/G weight(main body) N/G weight(037B help arm) N/G weight(total)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(3.8*1.0*1.8 ft) 228/256 kg (502/563 lbs) 90/104 kg (198/229lbs) 318/360 kg(700/360 lbs)



PL-1237IT

HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"





INDEPENDENT 037B LEFT HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently
- * 360° rotary tyre pressing help arm







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"



Complete pressure gauge box



Complete oil fog maker 3500



Jaw 200 protector (short)



Mount/demount head Lifting lever protector 7#





shovel protection cover



Tire pressing head (upper)



Tire pressing head(bottom)



Oil-water box



Rim Protection

SPECIFICATIONS


Working pressure Optional power supply Optional motor power Dimension(037B help arm) N/G weight(main body) N/G weight(037B help arm) N/G weight(total)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(3.8*1.0*1.8 ft) 240/268 kg (528/590 lbs) 90/104 kg (198/229lbs) 330/372 kg(726/818 lbs)



PL-1256J

HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"





INDEPENDENT 056 HELP ARM SYSTEM

- * Curved & unique design 360° rotary tyre pressing help arm.
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently.
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping
14~26"

Outside clamping
12~23"

STANDARD PARTS



Complete oil fog



Jaw'200 protector (short)



Bead breaker shovel protection



Lifting lever





Tire pressing

head (upper)



maker 3500





Rim Protection



T01 Automatic mount/ demount head Protector


SPECIFICATIONS

Working pressure Optional power supply Optional motor power Dimension(056 help arm) N/G weight 8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1230*450*350mm(4*1.5*1 ft) 285/330 kg(628/728 lbs)



PL-1256ITJ

HIGHER CLASS SERIES 2 years warranty



Max working clamping 26"







INDEPENDENT 056 HELP ARM SYSTEM

- * Curved & unique design 360° rotary tyre pressing help arm.
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and
- * Double nylon pressing roller design, much easier for demounting / mounting the tire.







PROPERTY RIGHTS OVER THE PRODUCTS OF R&D. **QUALITY GUARANTEE**




RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~26"



Outside clamping 12~23"

STANDARD PARTS

Complete pressure



gauge box



maker 3500







Bead breaker shovel protection



Oil-water box

head (upper)







Rim Protection

SPECIFICATIONS

Working pressure Optional power supply Motor power Dimension(056 help arm)

N/G weight(total)

8-10bar(116-145 psi) 110v (1ph)/ 220v (1/3ph)/380v(3ph) 0.55/0.75/1.1 kw 1550*310*550mm(3.8*1.0*1.8 ft) 363/395kg kg(800.3/870.8 lbs)



HIGHER CLASS SERIES 2 years warranty

* High resolution camera and 8" VGA LCD visualization system lets operator to monitor and control tyre demounting operation. Imported hydraulic pump station and reverse switch.












- * Pneumatic tyre lifter ,save man-power.
- * Full automatic operation control and clamping rim size 10"-30" are specially suitable for big size tyres, explosion-proof tyre, low profile tire ,RV tyres and big vacuum tyres.
- * 360° rotary tyre pressing help arm.
- * Full-automatic hydraulic 360° rotary steel tyre demounting hook can demount tyre without lever.









SPECIFICATIONS

Rim dimensions Working pressure

Hydraulic pressure

Optional rotating motor power supply

Optional pump power motor power supply

Rotating motor power

Pump power

Bead breaker force

N/G weight

10"~ 30"

8-10bar (116-145 psi)

100bar

220v (1ph/3ph)/380v(3ph)

220v (3ph)/380v(3ph)

0.75/1.1 kw

1.5 kw

1400kg

573/660 kg(1260.6/1452 lbs)



HIGHER CLASS SERIES 2 years warranty

★ Pneumatic control vertical arm rise & fall, easy operation



 Automatic central positioning & locking flange workbench for vehicle,
 SUV and commercial vehicles wheels up to 30".







- * Left side pneumatic tyre lifter to help easy lift up & unloading the tyres, save man-power.
- * Full automatic operation.



- * Full pneumatic control to press the edge of both up & down fire beads, quickly and easily to separate fire bead and rim
- ★ Big working scope from 10"-30", special suitable for big size tyres, anti-flat tyres and big vacuum tyres
- * Unique design 360° rotary tyre pressing help arm







SPECIFICATIONS

Rim dimensions
Working pressure
Optional power supply
Optional motor power

Optional motor power Bead breaker force

760kg (2kbf) 480/500 kg(10

1.1 kw

10"~ 30"

8-10bar (116-145 psi)

110v (1ph)/ 220v (1/3ph)/380v(3ph)

N/G weight 480/500 kg(1058/1102 lbs)



TIRE CHANGER SPARE PARTS



Complete inflating gun



Digital inflating gun



Complete pressure gauge box

03



04

Digital pressure gauge box



D5

Complete oil fog maker 3500

10





Complete oil fog maker 2000



Jaw 200





08

Jaw 600



09

Jaw'200 protector(short)



Jaw'200 protector(long)





Mount/demount head protector 3#





Mount/demount head protector 7# & 8#



head B03#



14

head 7#



Complete Mount/demount Complete mount/demount



head 8#



20



15

Complete Mount/demount





Complete mount/demount demount head head plastic 5#



17

22

Complete mount / motorcycle



18

23

T01 Automatic mount/ demount head Protector



24

19

Complete Tyre pressing roller





Complete Rotating valve 600





Complete Rotating valve (A)



Complete Rotating valve



Complete quick release nut (tyre changer)



Cones set (tyre changer)







Motorcycle adaptor of tire changer



26

Tire pressing head (upper)



27

Tire pressing head(bottom)

32



28

Tire lifting roller head



29

Bead breaker shovel protection cover





Lifting lever



31

Oil-water box



Bead pressing tool

37



33

Complete pneumatic locking switch



Complete gear box



Complete bead breaker cylinder D186



41

cylinder D200



Complete bead breaker Rim Protection

42



Air booster



39

Complete 5-way valve (T-union)





Complete 5-way valve(tilting)



Complete 5-way valve(inflating)



Complete 5-way valve(L-union)



Reverse switch pedal (sliver)



pedal(sliver, right)



pedal(black,right)

Reverse switch

pedal (black)



5-way valve pedal(black,left)



BASIC SERIES 1 year warranty











4-hole adapter for passenger cars (Tr36)





Universal wheel flange (Tr36)



Cone (Tr36)









release nut (Tr36)





shaft(Tr36)



assembly tools

caliper







wetights100g

Pressure ring

SPECIFICATIONS

Optional power supply Balancing speed Balancing accuracy Measuring time N/G weight

120 r.p.m $\pm 1g(\pm 0.04 \text{ oz})$ 47/66 kg(103.4/145.2 lbs)



PL-1109

BASIC SERIES 1 year warranty













passenger cars (Tr36)



Universal wheel flange (Tr36)



Cone (Tr36)



Plastic lid



Rubber Buffer



release nut (Tr36)







shaft(Tr36)



caliper



assembly tools





SPECIFICATIONS

Optional power supply Balancing speed Balancing accuracy Measuring time N/G weight

120 r.p.m

 $\pm 1g(\pm 0.04 \text{ oz})$

47/66 kg(103.4/145.2 lbs)



BASIC SERIES 1 year warranty





- * High precision main shaft ensures repeated measuring accuracy
- Extended measuring scale can measure rims from 10" to 24"
- * With self-calibration and self-diagnosis functions
- * LED light & Digital display
- * Movable& Easy- Your Good Helper























passenger cars (Tr36)

Universal wheel



Cone (Tr36)



Plastic lid







release nut (Tr36)





shaft(Tr36)

caliper



assembly tools





Pressure ring

SPECIFICATIONS

Optional power supply Balancing speed Balancing accuracy Measuring time N/G weight

120 r.p.m

 $\pm 1g(\pm 0.04 \text{ oz})$



PL-1150

BASIC SERIES 1 year warranty



OPTIONAL











Universal wheel flange (Tr36)

STANDARD PARTS



Cone (Tr36)



Protection hood





Plastic lid Rubber Buffer





Complete quick

release nut (Tr36)





Width Caliper



shaft(Tr36)



caliper



assembly tools





SPECIFICATIONS

Optional power supply Motor power Balancing speed Balancing accuracy Measuring time N/G weight

200 r.p.m

 $\pm 1g(\pm 0.04 \text{ oz})$



BASIC SERIES 1 year warranty



















Cone (Tr36)



Protection hood









release nut (Tr36)



shaft(Tr36)



caliper





760 mm 960mm 2.5 ft 3.1 ft

1080 mm 3.5 ft



00 mm

Standard wetights100g Pressure ring

SPECIFICATIONS

Optional power supply Motor power Balancing speed Balancing accuracy Measuring time

200 r.p.m

 $\pm 1g(\pm 0.04 \text{ oz})$

PL-1100

BASIC SERIES 1 year warranty



OPTIONAL











STANDARD PARTS



Cone (Tr36)



2pcs/set





















SPECIFICATIONS

Optional power supply Motor power Balancing speed Balancing accuracy Measuring time

N/G weight

0.20/0.37kw $\pm 1g(\pm 0.04 \text{ oz})$



BASIC SERIES 1 year warranty















Universal wheel flange (Tr36)

STANDARD PARTS



Cone (Tr36)









release nut (Tr36)





caliper

shaft(Tr36)







Standard Pressure ring



Optional power supply Motor power Balancing speed Balancing accuracy Measuring time N/G weight

110v (1ph)/ 220v (1/3ph)/ 380v (3ph) 0.20/0.37kw 200 r.p.m $\pm 1g(\pm 0.04 \text{ oz})$ 102/126kg(224/277 lbs)



PL-1500

TRUCK SERIES 1 year warranty


4 balancing modes(Car & Truck)














* Memory of measured data and error self-test function

* Various balancing modes for different tyres



ALU-2



STANDARD PARTS






























SPECIFICATIONS

Optional power supply Balancing speed

220V/1PH/0.75KW 220V/3PH/0.55KW 380V/3PH/0.55KW $\pm 50g(\pm 1.76 \text{ oz})$

88/103kg(194/227 lbs)



TRUCK SERIES 1 year warranty

4 balancing modes(Car & Truck) * Pneumatic tyre lifting platform can








mount tyre conveniently and balance variousbig tyres easily.

* High precision main shaft ensures repeated measuring accuracy

* Memory of measured data and error self-test function * Various balancing modes for







Threaded



shaft(Tr40) caliper assembly tools



































SPECIFICATIONS Optional power supply

Balancing speed Balancing accuracy Measuring time N/G weight

220V/1PH/0.75KW 220V/3PH/0.55KW 380V/3PH/0.55KW 200 r.p.m 8s 226/273kg(498/601 lbs)



PL-1800

HIGHER CLASS SERIES 2 years warranty











Universal wheel flange (Tr36)



Cone (Tr36)



Protection hood





Plastic lid Rubber Buffer







release nut (Tr36)





shaft(Tr36)



caliper









Optional power supply Motor power Balancing speed Balancing accuracy Measuring time

N/G weight

200 r.p.m $\pm 1g(\pm 0.04 \text{ oz})$

98/122 kg(216/268 lbs)



HIGHER CLASS SERIES 2 years warranty













Universal wheel



Cone (Tr36)



Protection hood









release nut (Tr36)





caliper

shaft(Tr36)



assembly tools





Pressure ring



Optional power supply Motor power Balancing speed Balancing accuracy Measuring time N/G weight

0.20/0.37kw 200 r.p.m





PL-1821

HIGHER CLASS SERIES 2 years warranty











Universal wheel flange (Tr36)

Complete quick

release nut (Tr36)



Cone (Tr36)



Protection hood



Plastic IId











caliper

shaft(Tr36)



assembly tools







SPECIFICATIONS

Optional power supply Motor power Balancing speed Balancing accuracy Measuring time

200 r.p.m

 $\pm 1g(\pm 0.04 \text{ oz})$



HIGHER CLASS SERIES 2 years warranty

















Cone (Tr36)














release nut (Tr36)











wetights100g




SPECIFICATIONS


Optional power supply Motor power Balancing speed Balancing accuracy Measuring time

200 r.p.m $\pm 1g(\pm 0.04 \text{ oz})$

PL-1829

HIGHER CLASS SERIES 2 years warranty

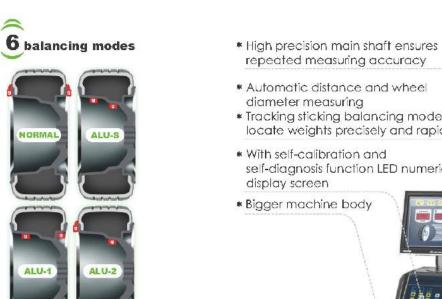











passenger cars (Tr36)



WIDTH MEASURING SCALE data automatic measurement function, and automatic memory function of measured data





Cone (Tr36)



Protection hood



Plastic IId





release nut (Tr36)

flange (Tr36)







caliper

shaft(Tr36)



assembly tools






SPECIFICATIONS

Optional power supply Motor power Balancing speed Balancing accuracy Measuring time

200 r.p.m



WHEEL BALANCER SPARE PARTS

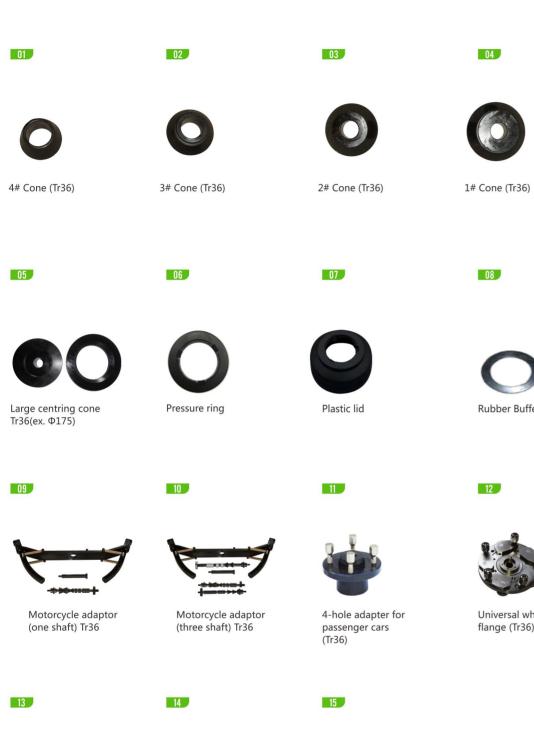


Standard wetights

100g


Complete quick

release nut (Tr36)

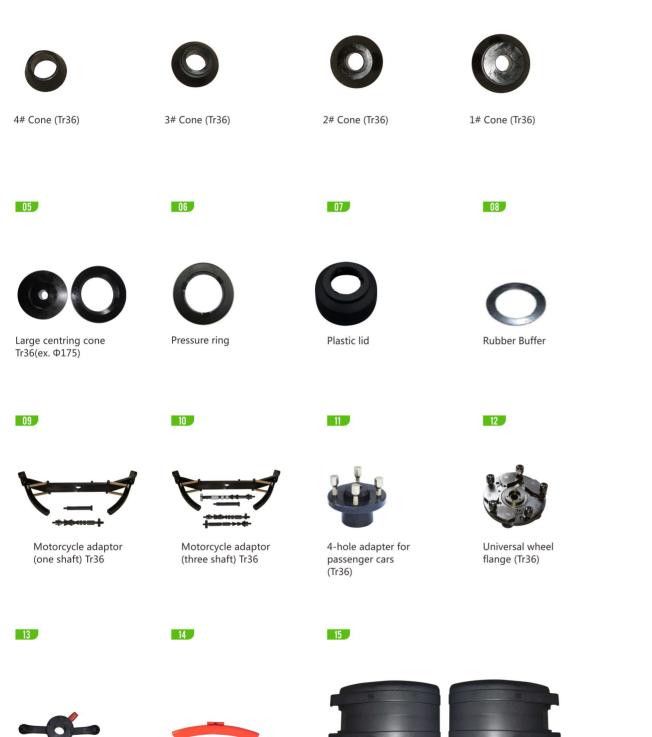

Protection hood

2pcs/set

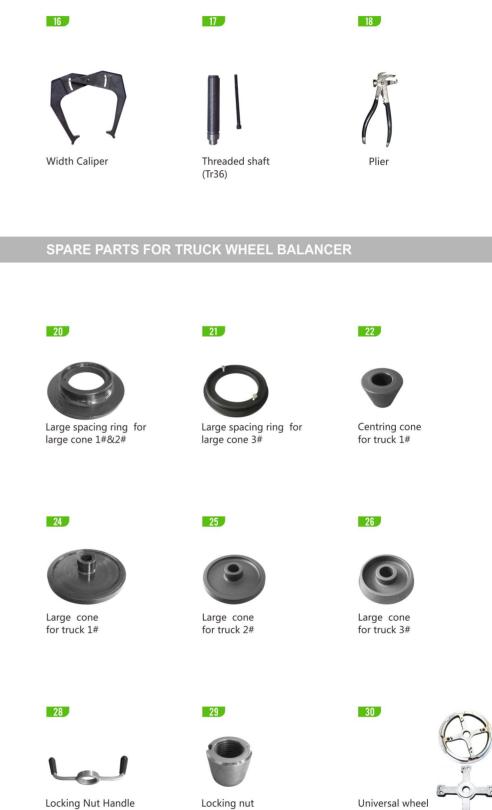

19

tools

23

Centring cone

Caliper for truck

for truck 2#

27

flange for truck

Protection hood assembly