

LIFT SERIES 2016

PULI

UNITE



UNITED TO EXPLORE


GUANGZHOU JINGJIA AUTO EQUIPMENT CO., LTD.

Tel: 86-20-86274345/86274320/86271992/86274256/86271343/36350276

Fax: 86-20-36747055/36350987

Http://www.chinapuli.com

E-mail: export@chinapuli.com

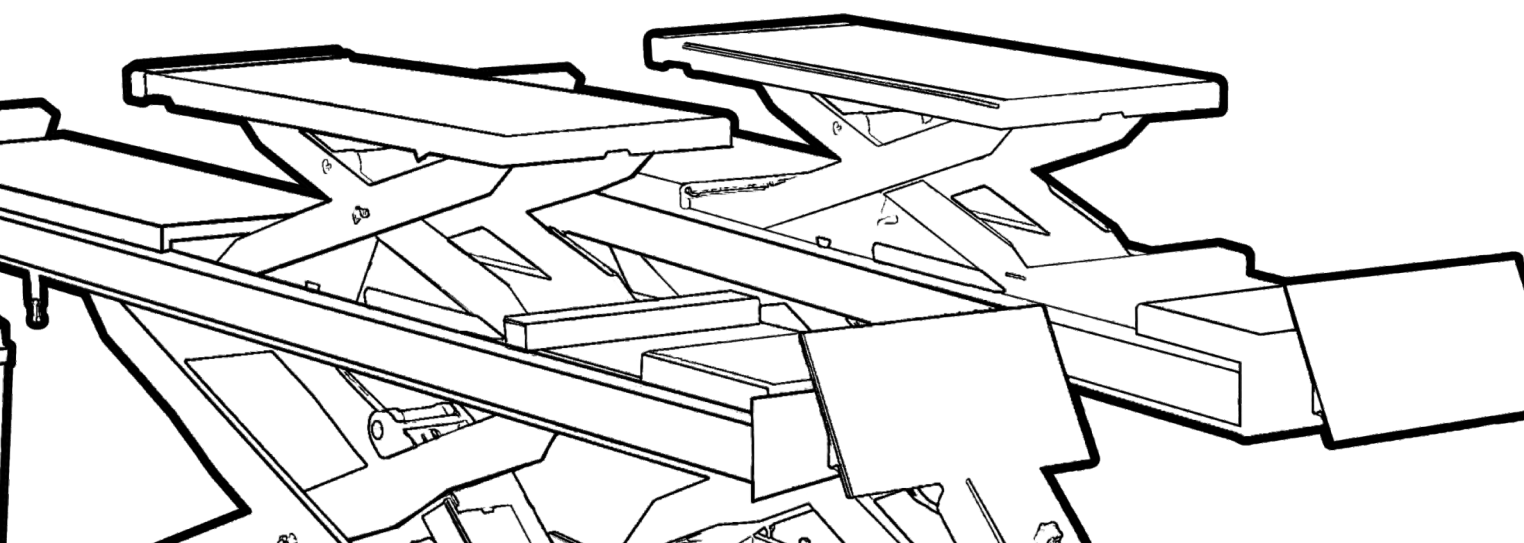

PULI
UNITE

COMPANY INTRODUCTION



GUANGZHOU JINGJIA AUTO EQUIPMENT CO.,LTD. is a leading Chinese Manufacturer with more than 20 years' producing experience specialist in researching , developing and manufacturing automotive service equipments, such as single post lift, two post lift, four post lift, scissor lift and other kinds of auto lifts.

Our factory was currently located in Binghai Industry Zone, Qidong City which conveniently connected with many highways and is just one hour drive to Shanghai city. Our manufacturing facility is 50,000m² in size.

As one of the fastest growing company in China Automotive Service Equipment industry, we have established an international -wide customers' base with our significant expansion into global markets and have achieved successful business cooperation with customers from more than 30 countries and regions. We have been honored with ISO-9001: 2000 approval by our well-organized in administrative management and production arrangement. Most of our products were under CE certificate.

We will devote our efforts to catching the step of a keep-on-gonging global market and we warmly welcome you come to visit our factory!



CONTENTS

TWO POST LIFT

04 Two post lift with floor plate

- 05 PL-3.5-2B/PL-4.0-2B
- 06 PL-3.5-2W
- 07 PL-4.0-2D
- 08 PL-4.0-2DU
- 09 PL-4.0-2DE
- 10 PL-3.5-2E/PL-4.0-2E

11 Clear floor two post lift

- 12 PL-3.8-2A
- 13 PL-4.0-2A
- 14 PL-4.0-2ET/PL-5.0-2ET
- 15 PL-4.0-SW
- 16 PL-4.5-MP/PL-5.0-MP
- 17 PL-4.5-SW

FOUR POST LIFT

- 19 PL-F35/F40/F45/F50/F55
- 20 PL-FS35Z/FS35/FS35D/FS40/FS45/FS50/FS55

PARKING LIFT

- 22 PL-PK402
- 23 PL-PK201

SCISSOR LIFT

- 25 PL-H30
- 26 PL-H30M
- 27 PL-B30M
- 28 PL-B30/PL-B30Y
- 29 PL-Z30/PL-Z30Y
- 30 PL-Z30L
- 31 PL-Z30M
- 32 PL-E30/PL-E35
- 33 PL-E30L/PL-E35L
- 34 PL-E30L(SUV)/PL-E35L(SUV)
- 35 PL-E30C/PL-E35C
- 36 PL-D35G
- 37 PL-P35/P45/P55
- 38 PL-C35/C45/C55
- 39 PL-Y35/Y35D/Y40/Y45
- 40 PL-D35/D35D/D45/D55
- 41 PL-D35HH/D45HH/D55HH
- 42 PL-D35B/PL-D40B
- 43 PL-S35/S40
- 44 The second lifting trolley

MOTORCYCLE LIFT

- 46 PL-M01
- PL-M02/PL-M04
- 47 PL-MT03/MT04/MT05



SINGLE POST LIFT

- 49 PL-S5.0T/S7.5T
- 50 PL-S2.5T




PL-3.5-2B/PL-4.0-2B

TWO POST LIFT WITH FLOOR PLATE

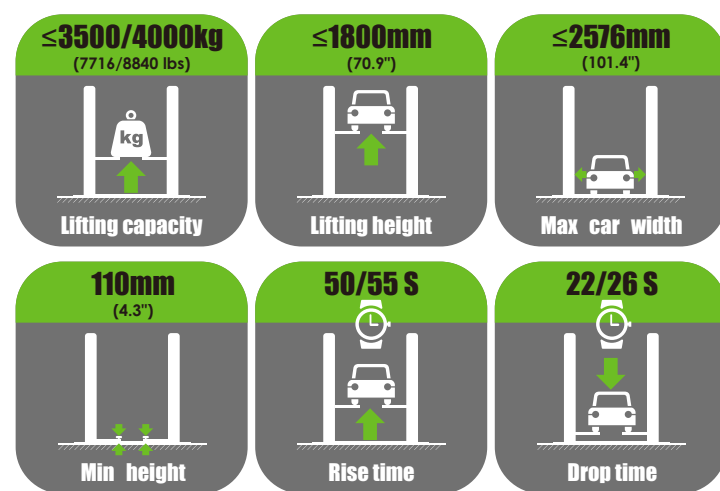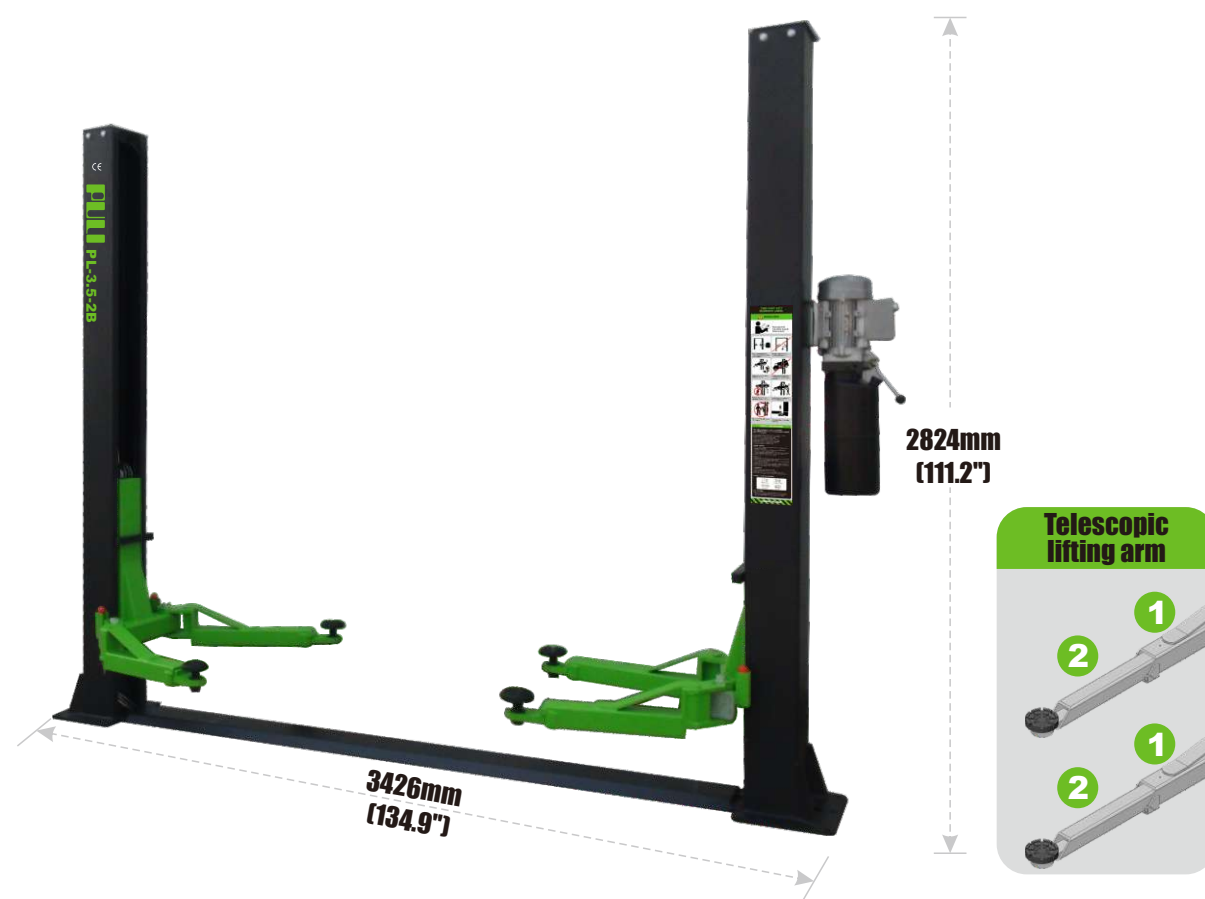

USE RANGE OF TELESCOPIC LIFTING ARM


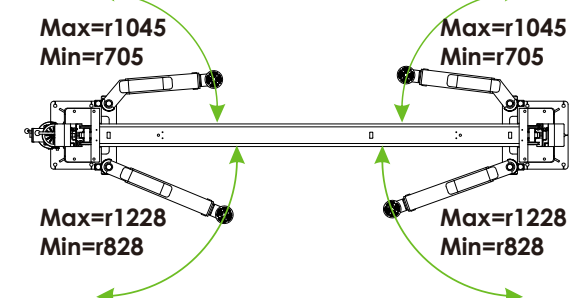


SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
 Motor power 2.2 kw

PL-3.5-2W

TWO POST LIFT WITH FLOOR PLATE

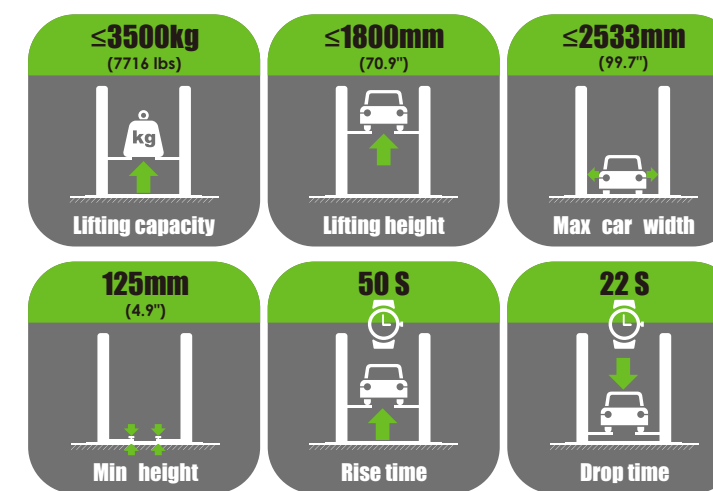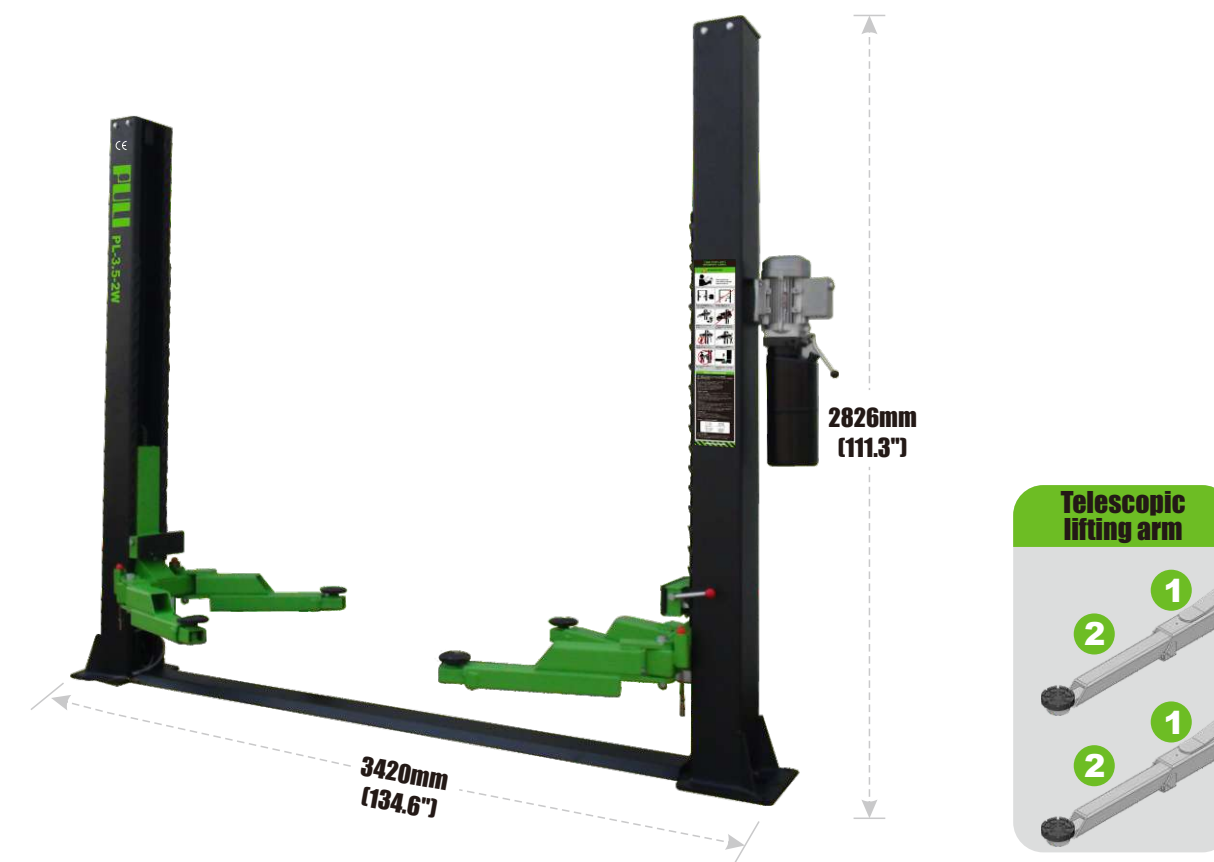

USE RANGE OF TELESCOPIC LIFTING ARM

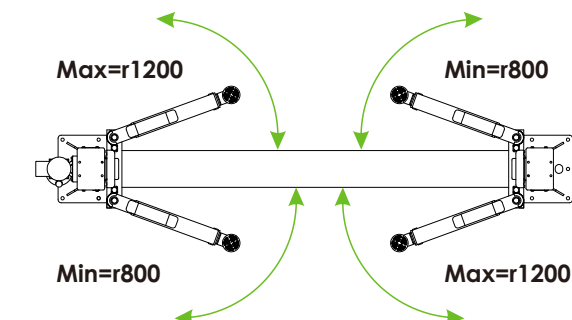


SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
 Motor power 2.2 kw

PL-4.0-2D

TWO POST LIFT WITH FLOOR PLATE

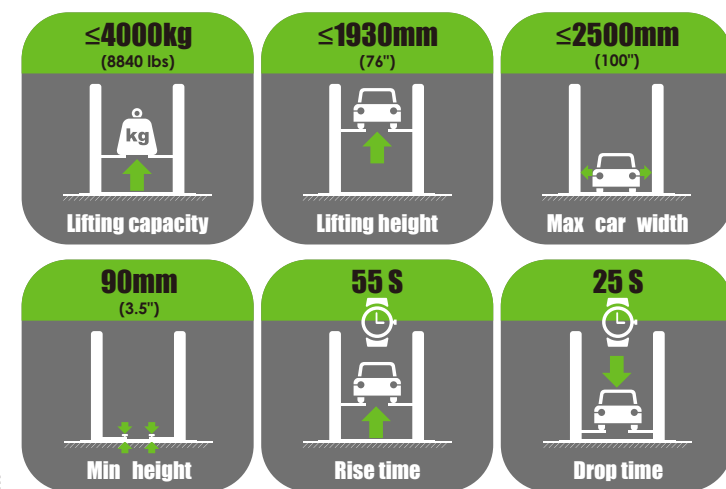

USE RANGE OF TELESCOPIC LIFTING ARM


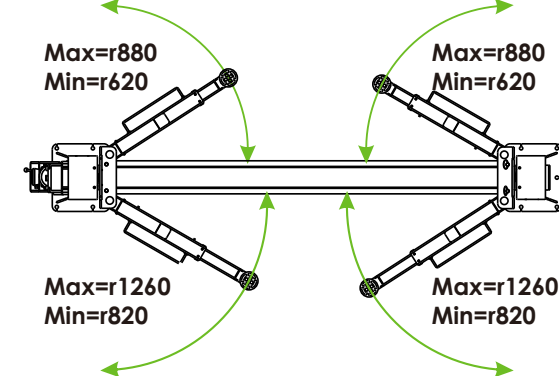


SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-4.0-2DU

TWO POST LIFT WITH FLOOR PLATE

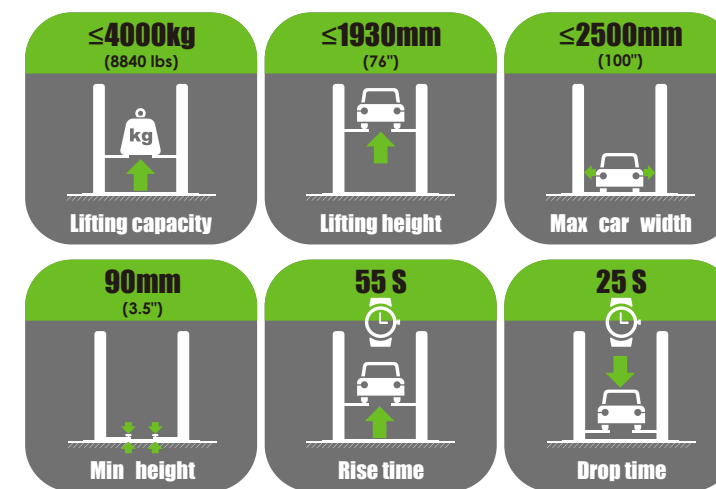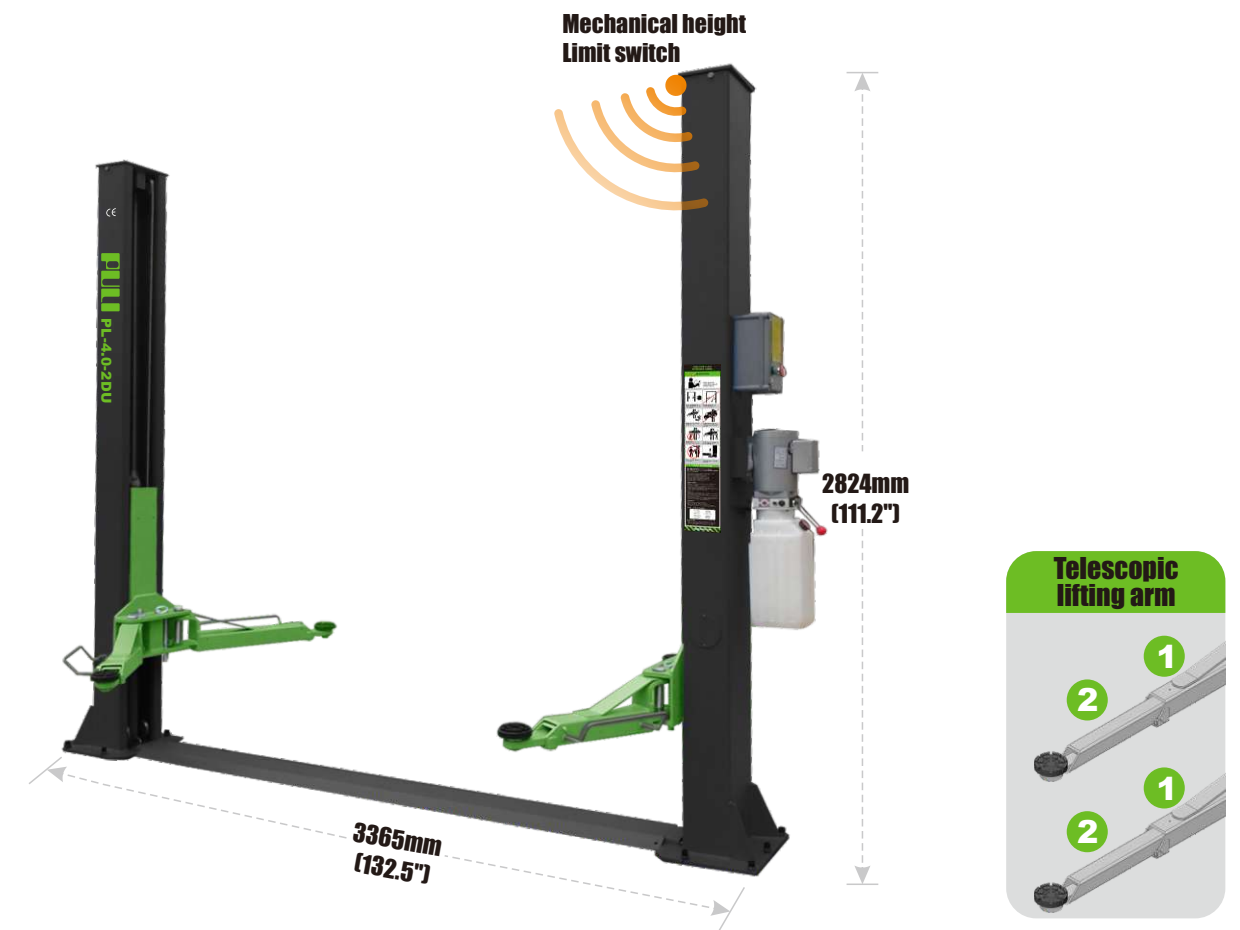

USE RANGE OF TELESCOPIC LIFTING ARM


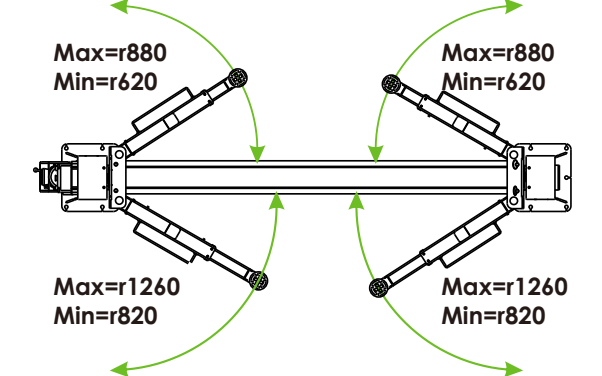


SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-4.0-2DE

TWO POST LIFT WITH FLOOR PLATE

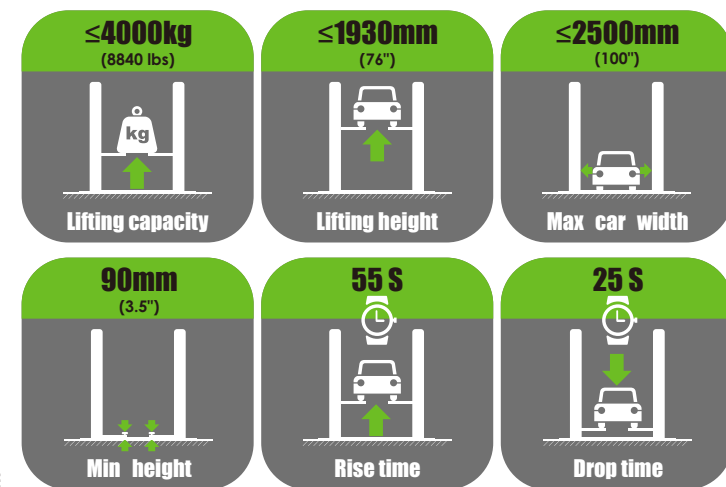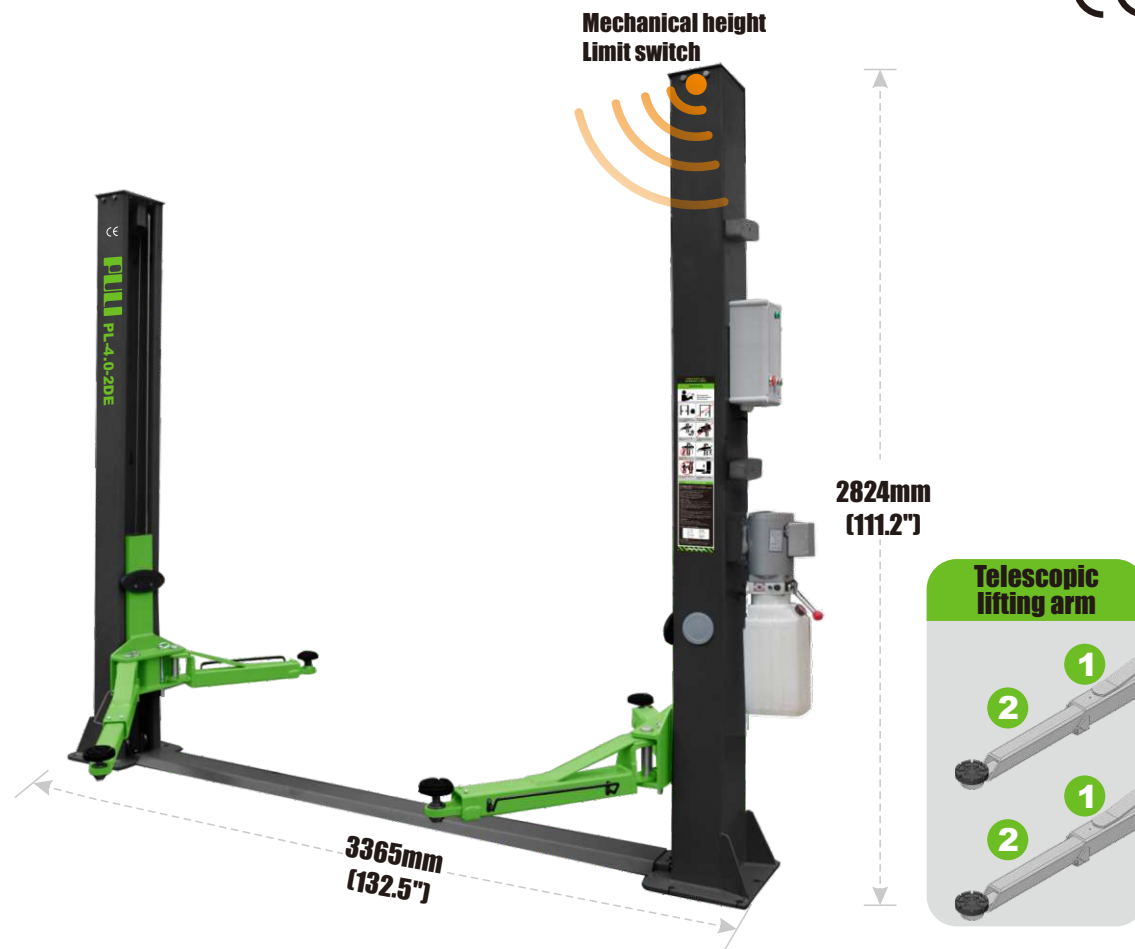

USE RANGE OF TELESCOPIC LIFTING ARM


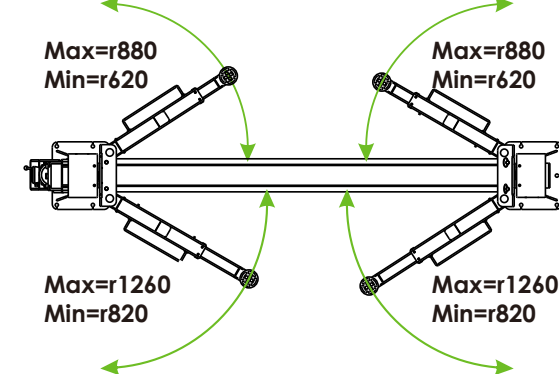


SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-3.5-2E/PL-4.0-2E

TWO POST LIFT WITH FLOOR PLATE

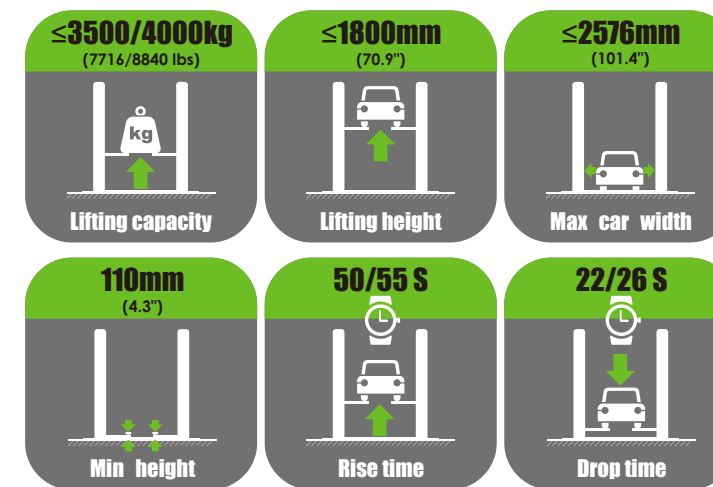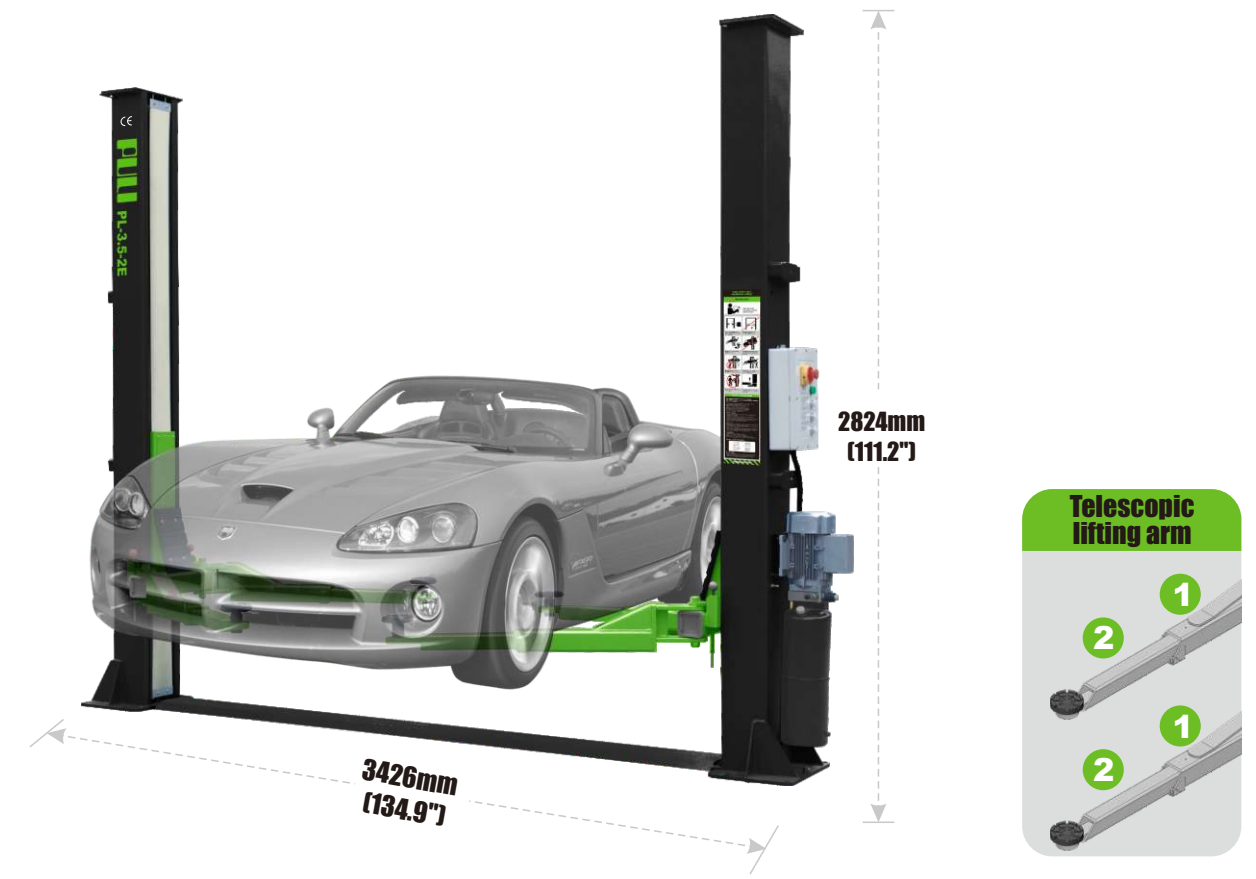

USE RANGE OF TELESCOPIC LIFTING ARM

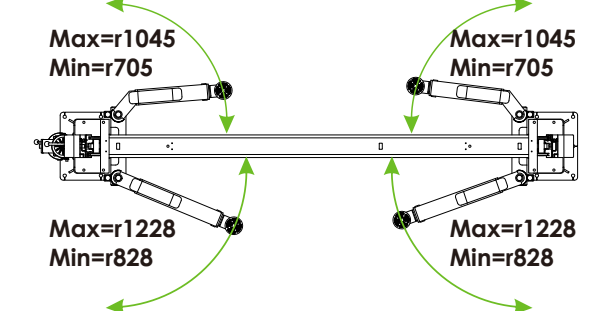


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

CLEAR FLOOR TWO POST LIFT




PL-3.8-2A CLEAR FLOOR TWO POST LIFT

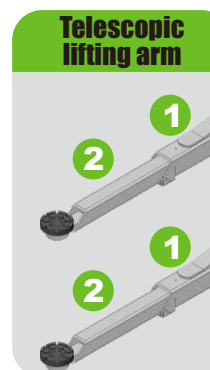

≤4000kg (8840 lbs) Lifting capacity	≤1800mm (70.9") Lifting height	≤2576mm (101.4") Max car width
110mm (4.3") Min height	50 S Rise time	22 S Drop time

USE RANGE OF TELESCOPIC LIFTING ARM

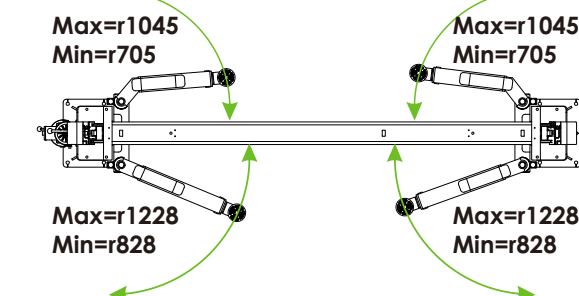


SPECIFICATIONS

Optional power supply	220v (1ph)/380v(3ph)
Motor power	2.2 kw

PL-4.0-2A

CLEAR FLOOR TWO POST LIFT

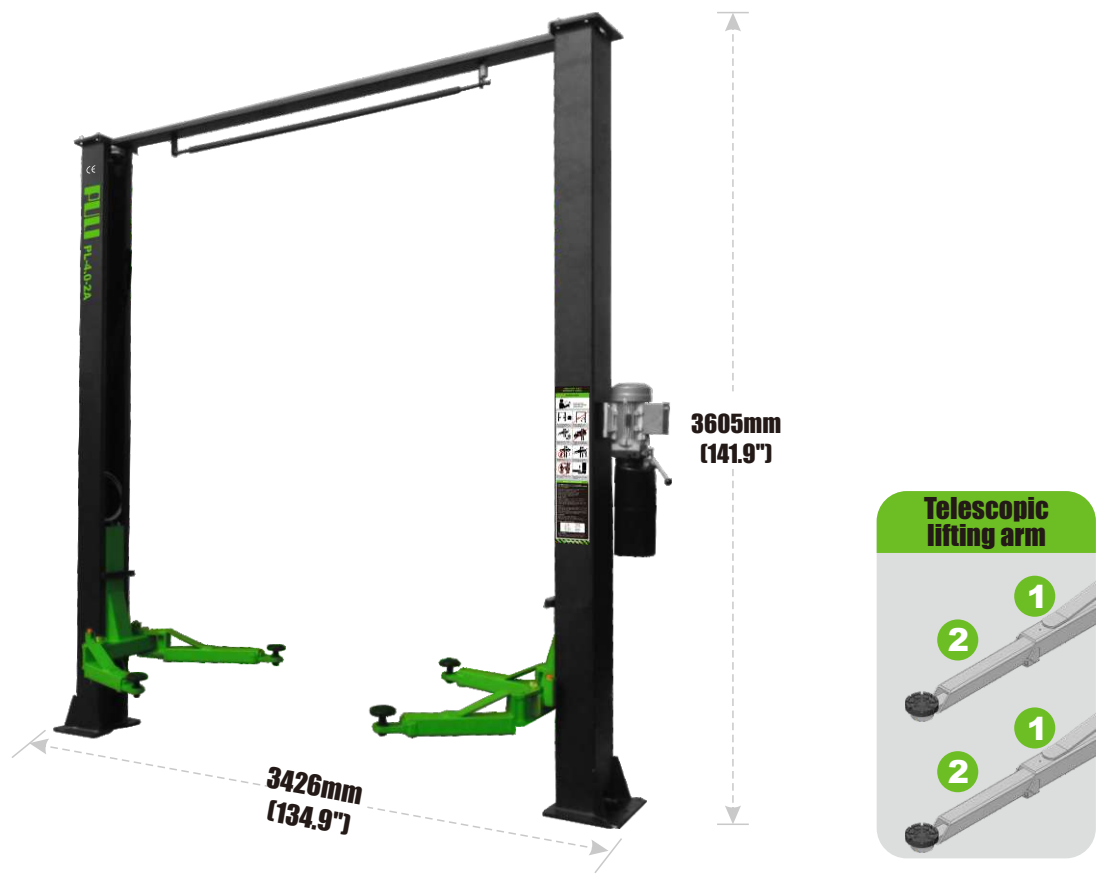

≤4000kg
(8840 lbs)

Lifting capacity

≤1800mm
(70.9")

Lifting height

≤2576mm
(101.4")

Max car width

110mm
(4.3")

Min height


50 S

Rise time

22 S

Drop time

USE RANGE OF TELESCOPIC LIFTING ARM

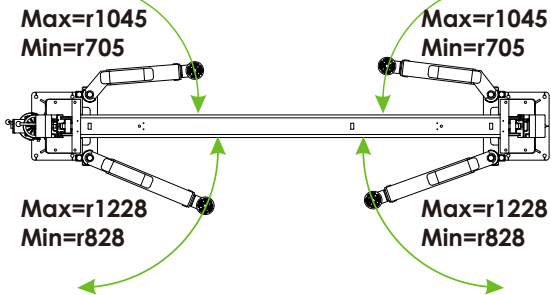


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-4.0-2ET/PL-5.0-2ET

CLEAR FLOOR TWO POST LIFT

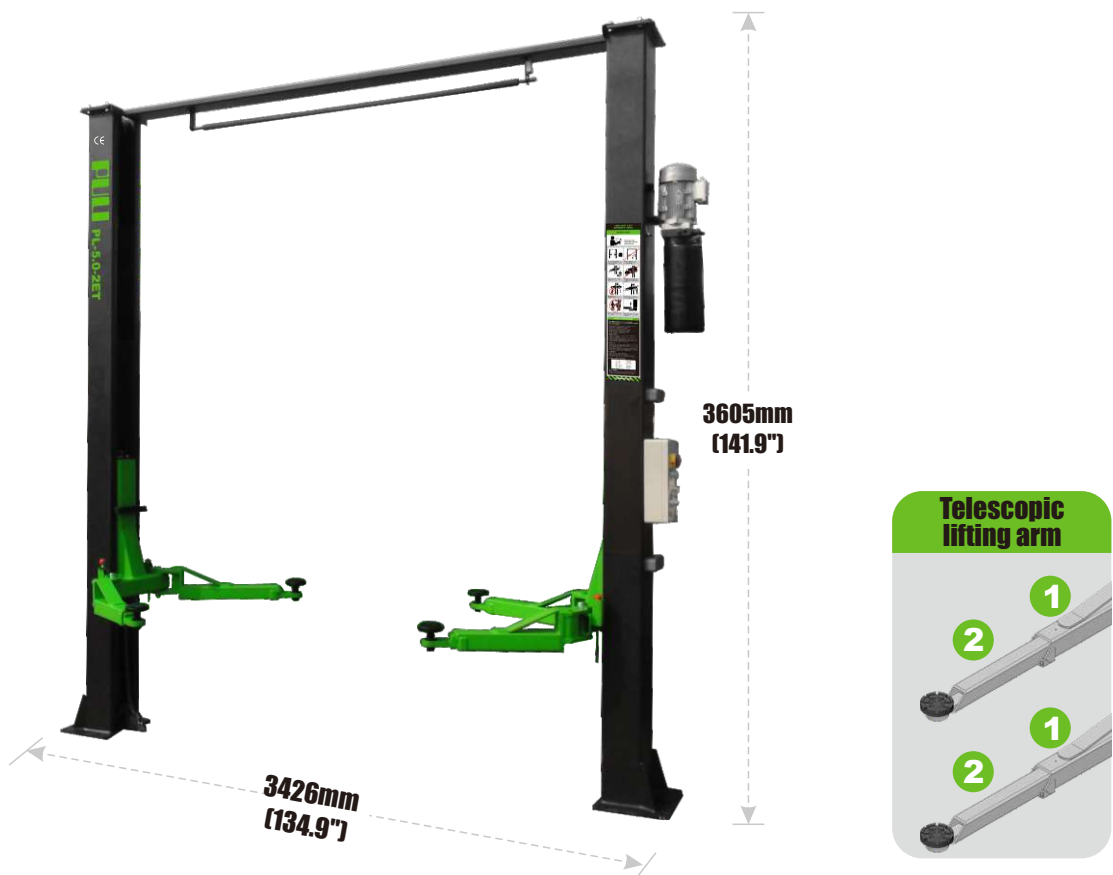

≤4000/5000kg
(8840/11050 lbs)

Lifting capacity

≤1850mm
(72.8")

Lifting height

≤2576mm
(101.4")

Max car width

110mm
(4.3")

Min height


50 S

Rise time

22 S

Drop time


USE RANGE OF TELESCOPIC LIFTING ARM

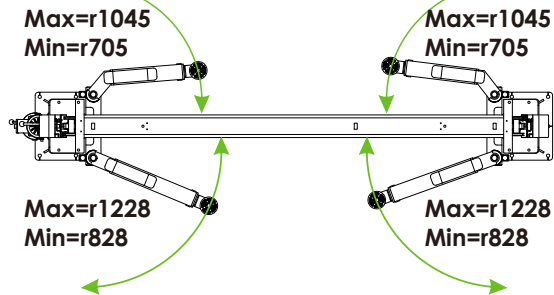

SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-4.0-SW
CLEAR FLOOR TWO POST LIFT

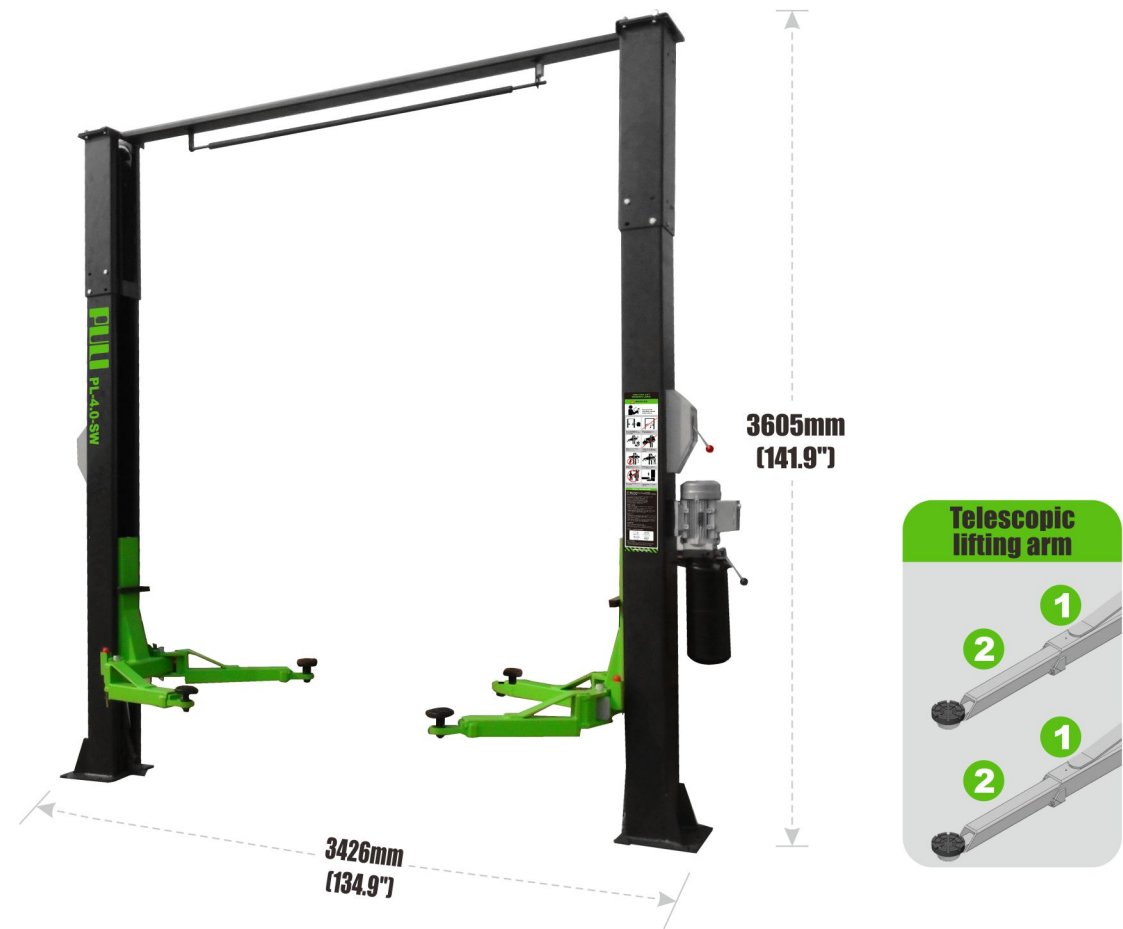

≤4000kg
(8840 lbs)

Lifting capacity

≤1800mm
(70.9")

Lifting height

≤2576mm
(101.4")

Max car width

110mm
(4.3")


Min height

50 S

Rise time


22 S

Drop time

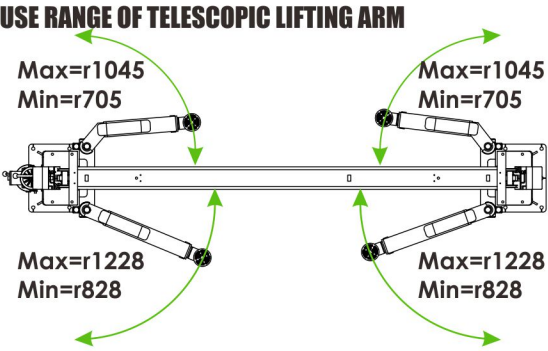

SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-4.5-MP/PL-5.0-MP
CLEAR FLOOR TWO POST LIFT

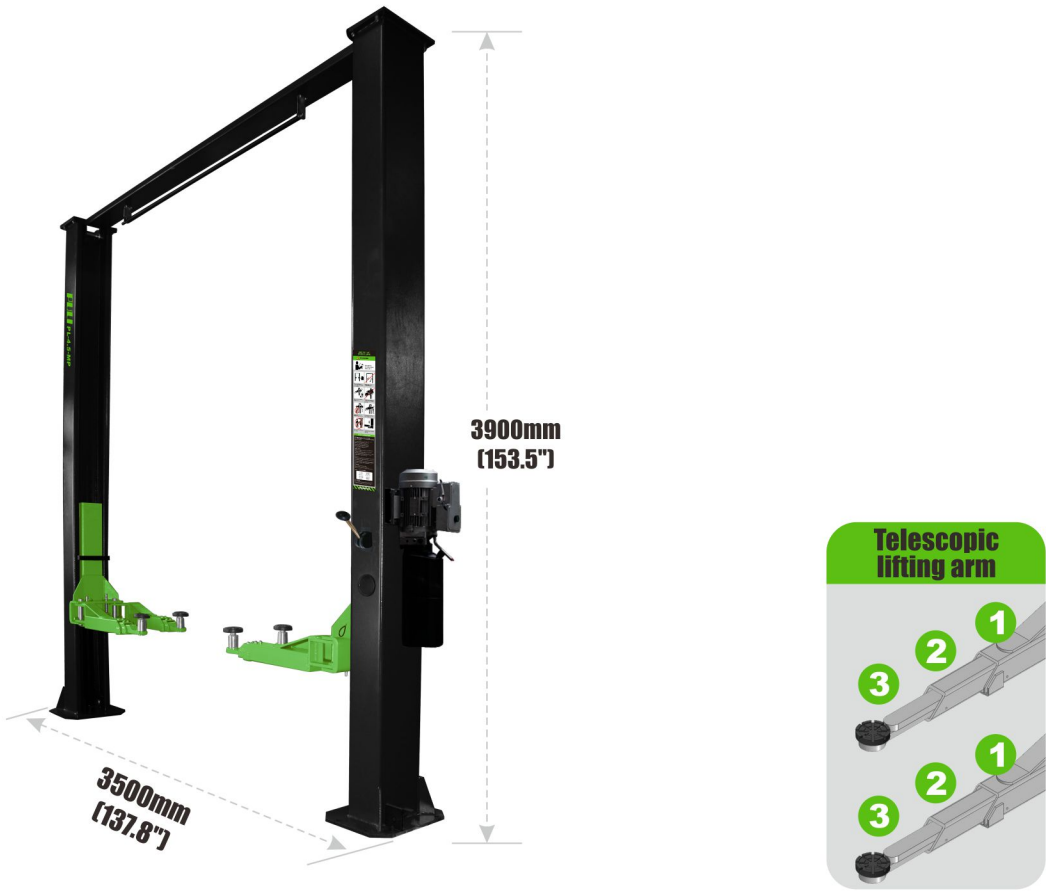

≤4500/5000kg
(9921/11023 lbs)

Lifting capacity

≤1850mm
(73")

Lifting height

≤3000mm
(118")

Max car width

110mm
(4.3")


Min height

50 S

Rise time

22 S


Drop time

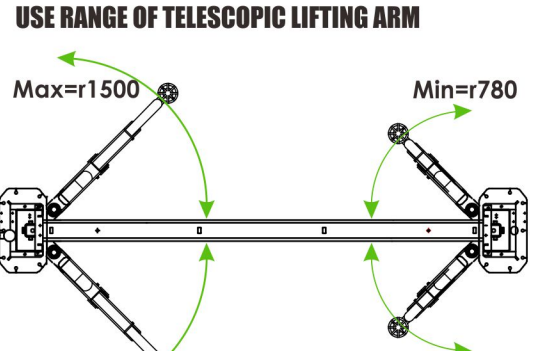

SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw


PL-4.5-SW

CLEAR FLOOR TWO POST LIFT

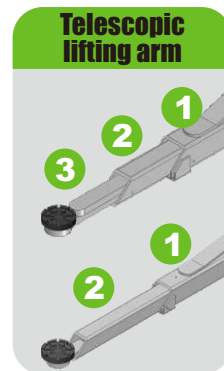

≤4500kg (9921 lbs) Lifting capacity	≤1915mm (75") Lifting height	≤2850mm (112") Max car width
105mm (4.1") Min height	50 S Rise time	45 S Drop time

USE RANGE OF TELESCOPIC LIFTING ARM

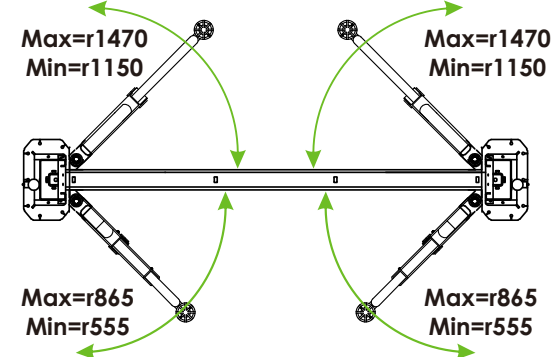

SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

FOUR POST LIFT



PL-F35/F40/F45/F50/F55


FOUR POST LIFT

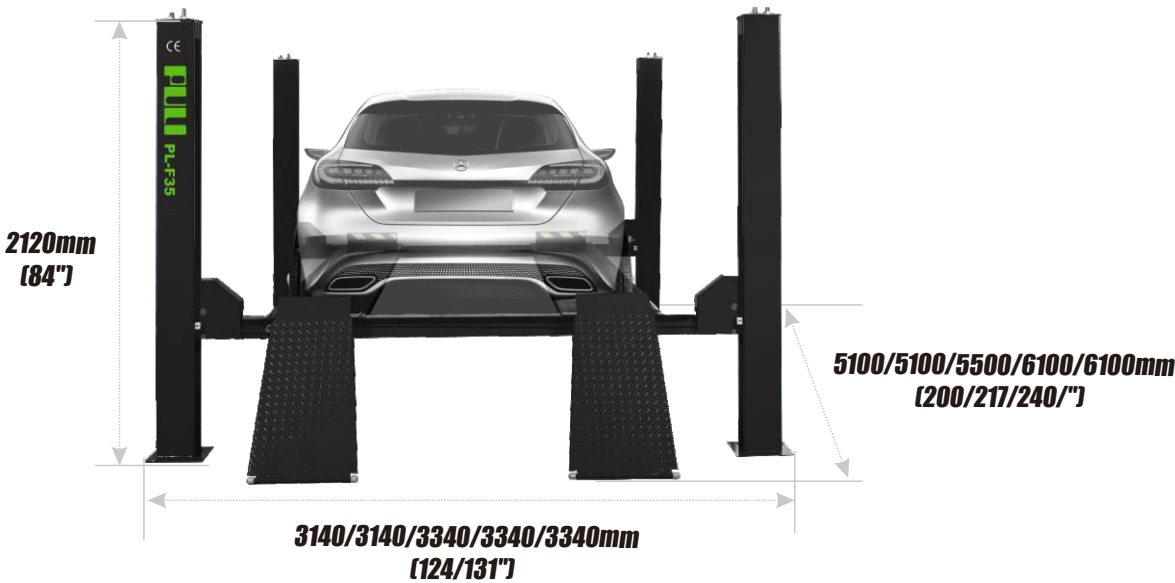

MODEL	Lifting capacity	Lifting height	Platform length	Platform height	Rise time	Drop time
PL-F35	≤3500kg (7716 lbs)	≤1700mm (67")	≤4250mm (167")	170mm (6.7")	≤30 S	≤30 S
PL-F40	≤4000kg (8818 lbs)	≤1700mm (67")	≤4250mm (167")	170mm (6.7")	≤30 S	≤30 S
PL-F45	≤4500kg (9921 lbs)	≤1700mm (67")	≤4650mm (183")	195mm (7.7")	≤30 S	≤30 S
PL-F50	≤5000kg (11023 lbs)	≤1700mm (67")	≤5190mm (204")	195mm (7.7")	≤35 S	≤35 S
PL-F55	≤5500kg (12125 lbs)	≤1700mm (67")	≤5190mm (204")	195mm (7.7")	≤35 S	≤35 S


SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

Overall dimensions



PL-FS35Z/FS35/FS35D/FS40/FS45/FS50/FS55


FOUR POST LIFT

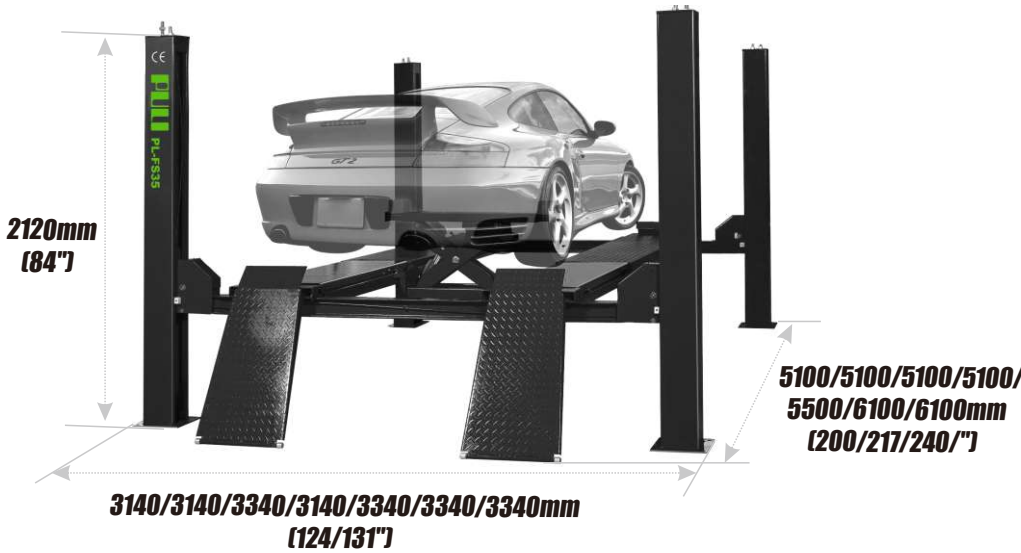

MODEL	Lifting capacity	Lifting height	Platform length	Platform height	Rise time	Drop time
PL-FS35Z	≤3500kg (7716 lbs)	≤1750mm (69")	≤4250mm (167")	220mm (8.7")	≤30 S	≤30 S
PL-FS35	≤3500kg (7716 lbs)	≤1750mm (69")	≤4250mm (167")	220mm (8.7")	≤30 S	≤30 S
PL-FS35D	≤3500kg (7716 lbs)	≤1750mm (69")	≤4650mm (183")	220mm (8.7")	≤30 S	≤30 S
PL-FS40	≤4000kg (8818 lbs)	≤1750mm (69")	≤4250mm (167")	220mm (8.7")	≤30 S	≤30 S
PL-FS45	≤4500kg (9921 lbs)	≤1750mm (69")	≤4650mm (183")	245mm (9.6")	≤30 S	≤30 S
PL-FS50	≤5000kg (11023 lbs)	≤1750mm (69")	≤5190mm (204")	245mm (9.6")	≤35 S	≤35 S
PL-FS55	≤5500kg (12125 lbs)	≤1750mm (69")	≤5190mm (204")	245mm (9.6")	≤35 S	≤35 S

SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

Overall dimensions

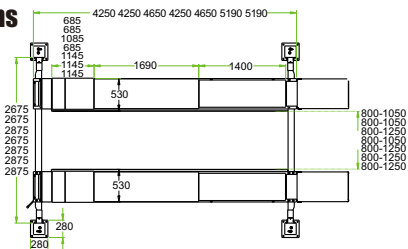

POST PARKING LIFT




PL-PK402 FOUR POST PARKING LIFT



≤3500kg (7716 lbs) Lifting capacity	≤1835mm (72.2") Lifting height	≤4001mm (157.5") Platform length
125mm (4.9") Platform height	50 S Rise time	

Overall dimensions

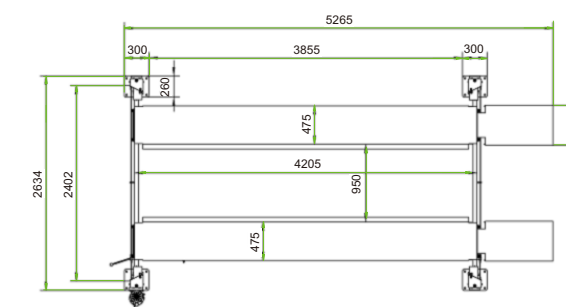

SPECIFICATIONS

Optional power supply	220v (1ph)/380v(3ph)
Motor power	2.2kw 50Hz

Remark: The hydraulic oil would be different in different regions or seasons, we suggest to use 46# wearable hydraulic oil between 10~55 degree, 32# between -5~10 degree, and 11# aviation hydraulic oil under -5 degree.


PL-PK201

TWO POST PARKING LIFT



≤3000kg (6600 lbs) Lifting capacity	≤2160mm (85") Lifting height	≤2195 mm (86.4") Max car width
125mm (4.9") Platform height	50~60 S Rise time	

Overall dimensions

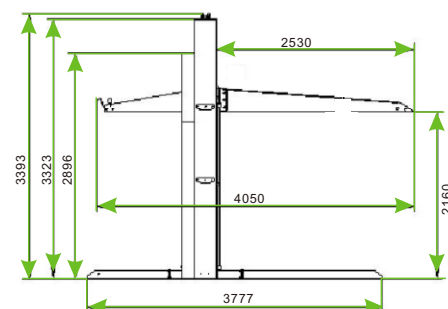

SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
 Motor power 2.2kw 50Hz

**SCISSOR
LIFT**



PL-H30

SMALL PLATFORM SCISSOR LIFT

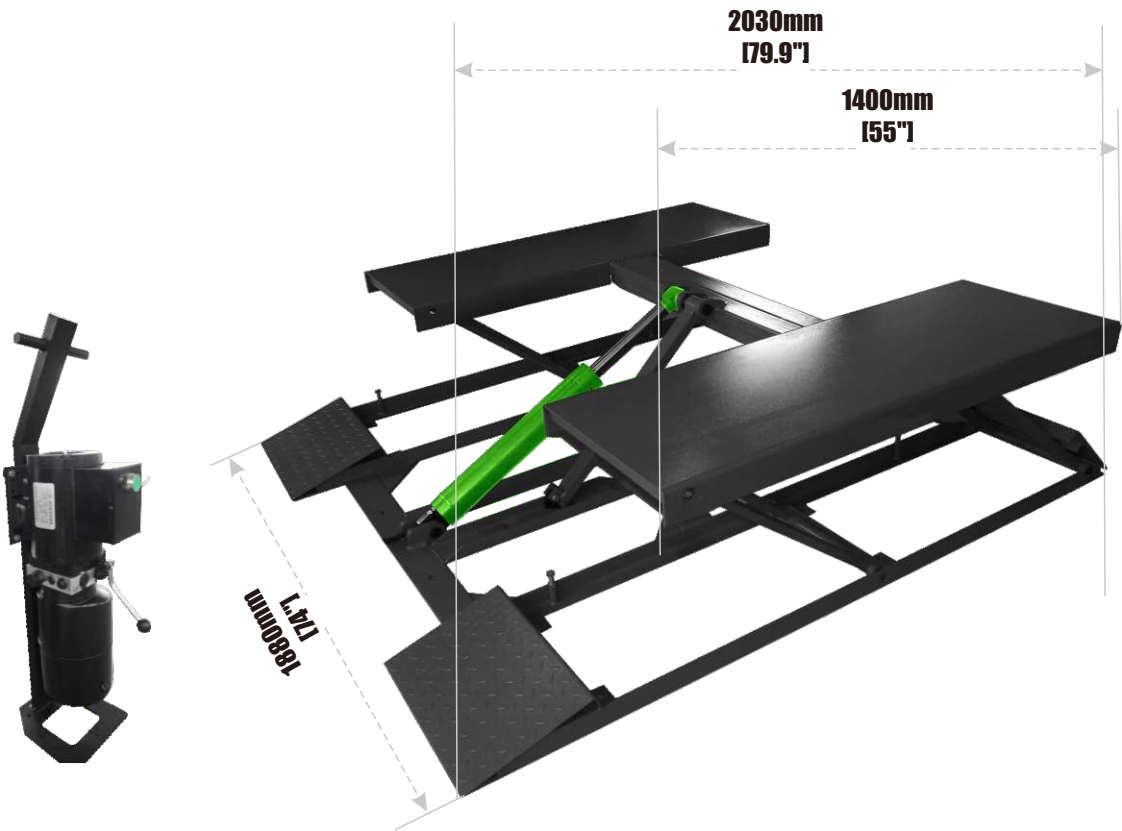

≤2500kg
(5511 lbs)

Lifting capacity

≤620mm
(24.2")

Lifting height

≤100mm
(3.9")

Min height

25 S

Lifting time

25 S

Dropping time

DIMENSION OVERVIEW

SPECIFICATIONS

Optional power supply


220v (1ph)/380v(3ph)

Motor power

2.2 kw

PL-H30M

SMALL PLATFORM MOVABLE SCISSOR LIFT

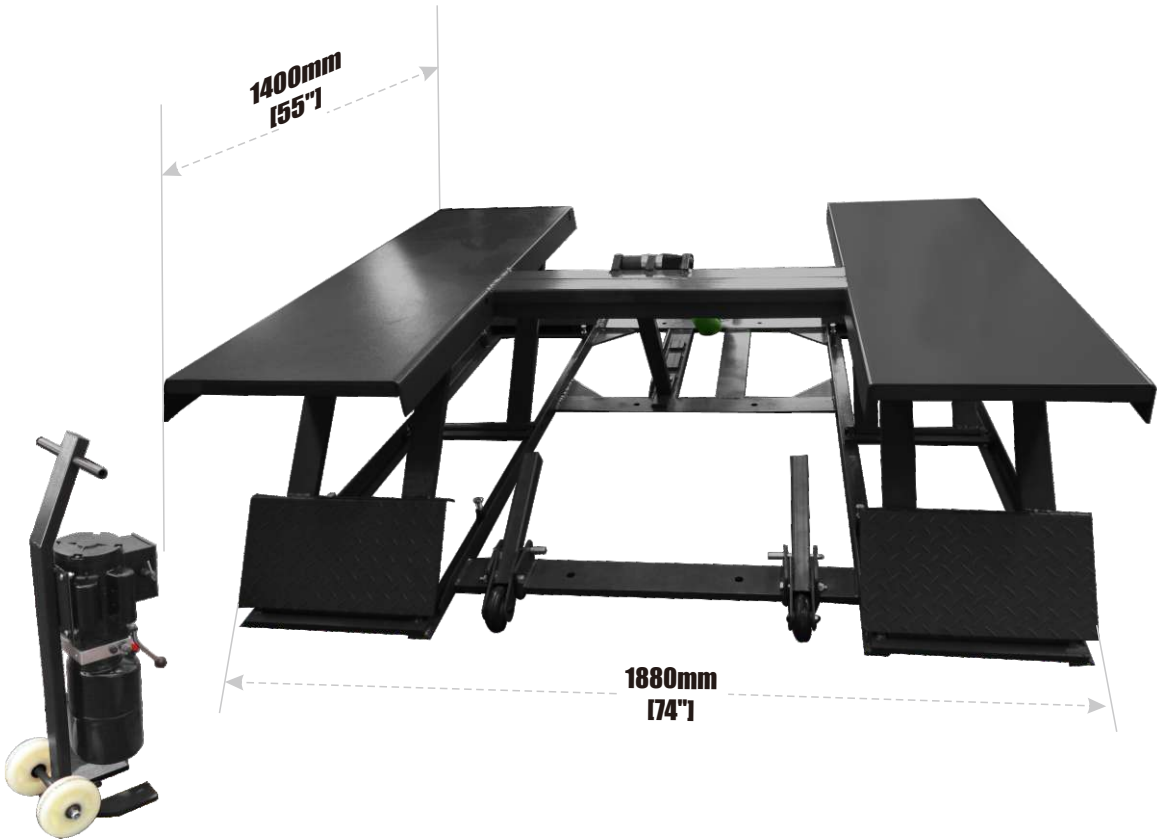

≤2500kg
(5511 lbs)

Lifting capacity

≤620mm
(24.2")

Lifting height

≤100mm
(3.9")

Min height

25 S

Lifting time

25 S

Dropping time

DIMENSION OVERVIEW

SPECIFICATIONS

Optional power supply


220v (1ph)/380v(3ph)

Motor power

2.2 kw

PL-B30M

SMALL PLATFORM MOVABLE SCISSOR LIFT

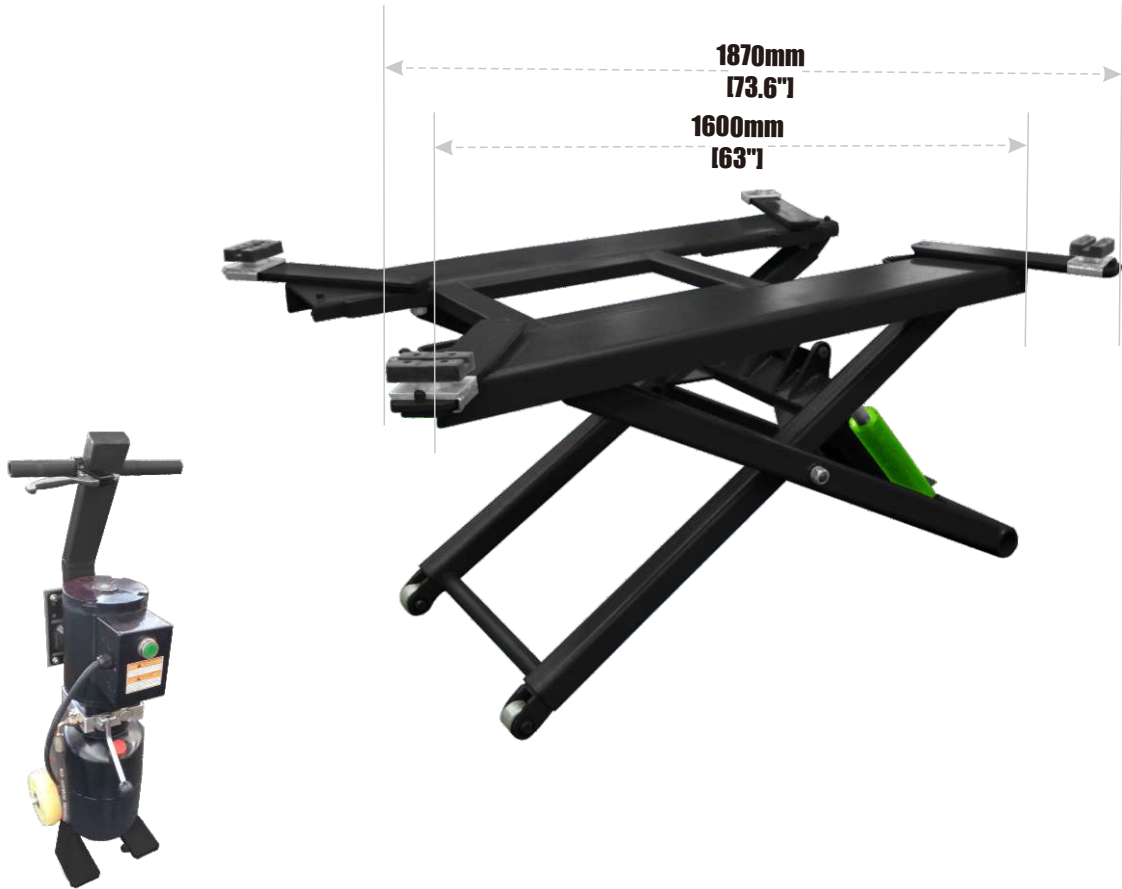

≤3000kg
(6600 lbs)

Lifting capacity

≤980mm
(38.6")

Lifting height

≤180mm
(7.1")

Min height


25 S

Lifting time

25 S

Dropping time

DIMENSION OVERVIEW

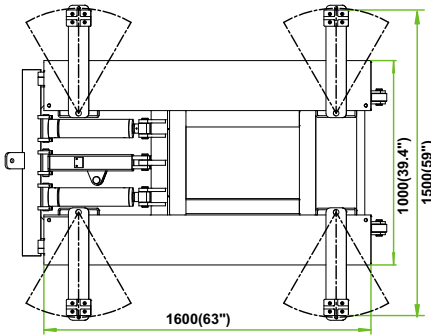


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-B30 / B30Y

FULL RISE LOW PROFILE SCISSOR LIFT

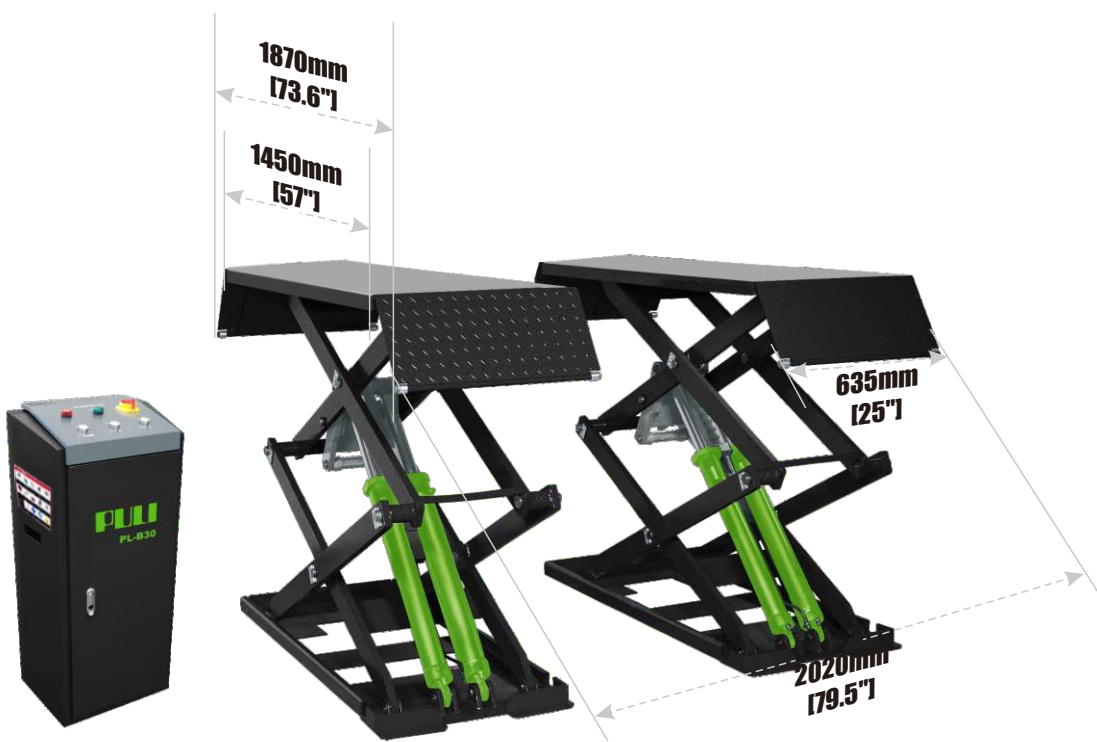

≤3000kg
(6600 lbs)

Lifting capacity

≤1850mm
(72.8")

Lifting height

≤105mm
(4.1")

Min height


55 S

Lifting time

55 S

Dropping time

DIMENSION OVERVIEW

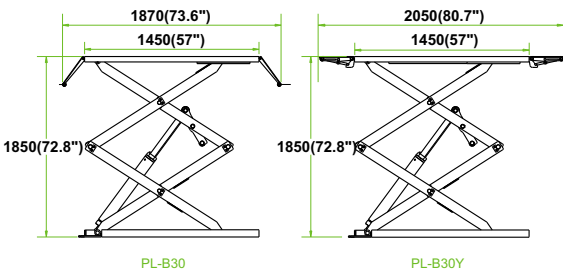


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-Z30/Z30Y

MID-RISE SCISSOR LIFT

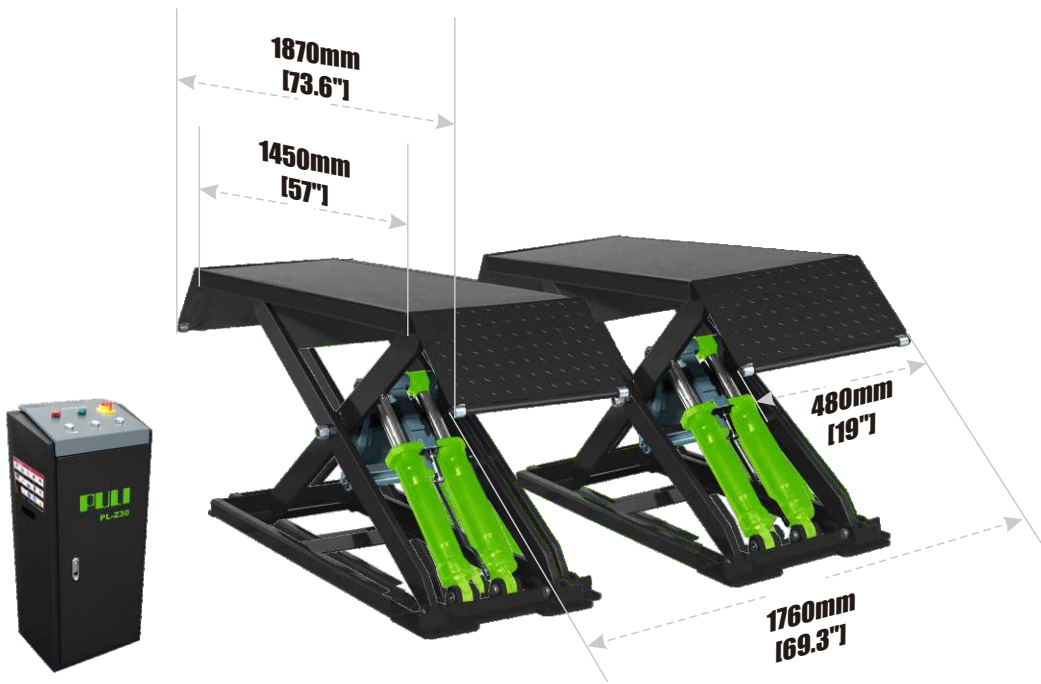

≤3000kg
(6600 lbs)

Lifting capacity

≤960mm
(37.8")

Lifting height

≤105mm
(4.1")

Min height

30 S

Lifting time

30 S

Dropping time


DIMENSION OVERVIEW

PL-Z30
PL-Z30Y

SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-Z30L

MID-RISE LINKED SCISSOR LIFT

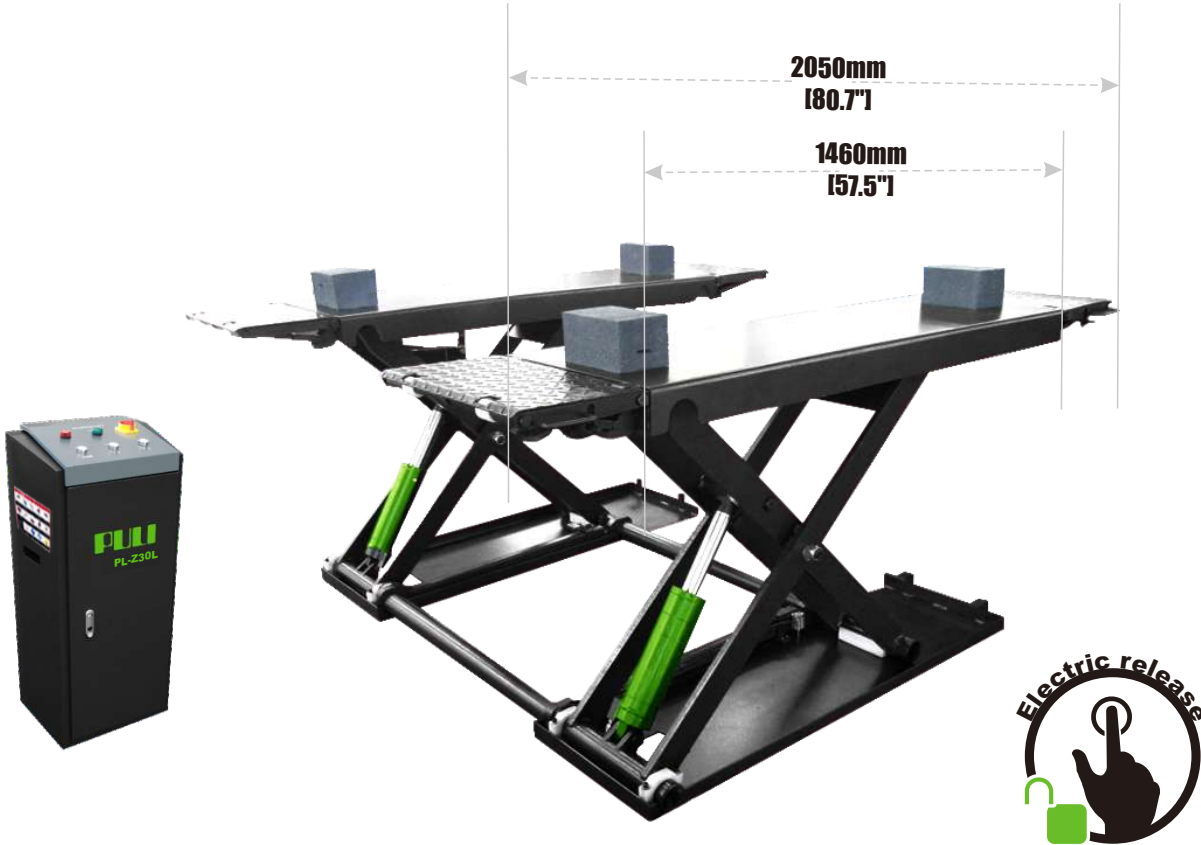

≤3000kg
(6600 lbs)

Lifting capacity

≤960mm
(37.8")

Lifting height

≤120mm
(4.7")

Min height

30 S

Lifting time

30 S

Dropping time

DIMENSION OVERVIEW

SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-Z30M

MID RISE MOVABLE SCISSOR LIFT



≤3000kg
(6600 lbs)

kg

Lifting capacity

≤960mm
(37.8")

Car icon

Lifting height

≤115mm
(4.5")

Min height

30 S


Car icon

Lifting time

30 S

Car icon

Dropping time

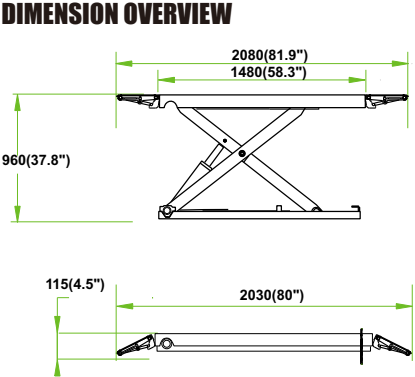


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)

Motor power 2.2 kw

PL-E30/E35

FULL RISE SCISSOR LIFT, IN-GROUND MOUNTED

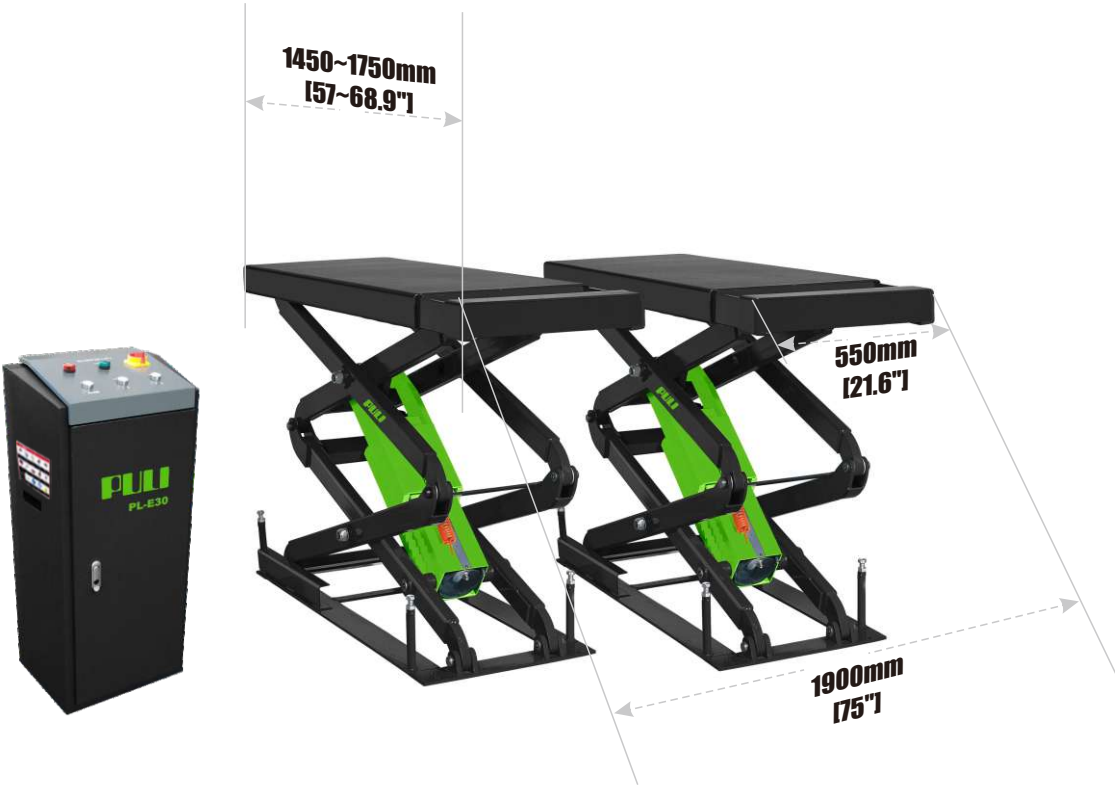

≤3000/3500kg
(6614/7716 lbs)

kg

Lifting capacity

≤2050mm
(80")

Car icon

Lifting height

≤330mm
(13")

Min height

55 S


Car icon

Lifting time

55 S

Car icon

Dropping time

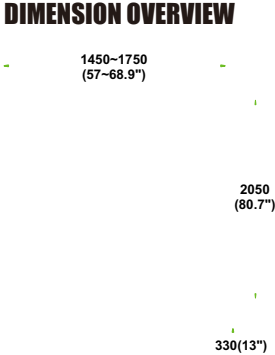

SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)

Motor power 2.2 kw

PL-E30L/E35L

FULL RISE SCISSOR LIFT, IN-GROUND MOUNTED



≤3000/3500kg
(6614/7716 lbs)

Lifting capacity

≤2050mm
(80")

Lifting height

≤330mm
(13")

Min height


55 S

Lifting time

55 S

Dropping time

DIMENSION OVERVIEW




SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-E30L/E35L(SUV)

FULL RISE SCISSOR LIFT WITH SUV SUPPORT, IN-GROUND MOUNTED

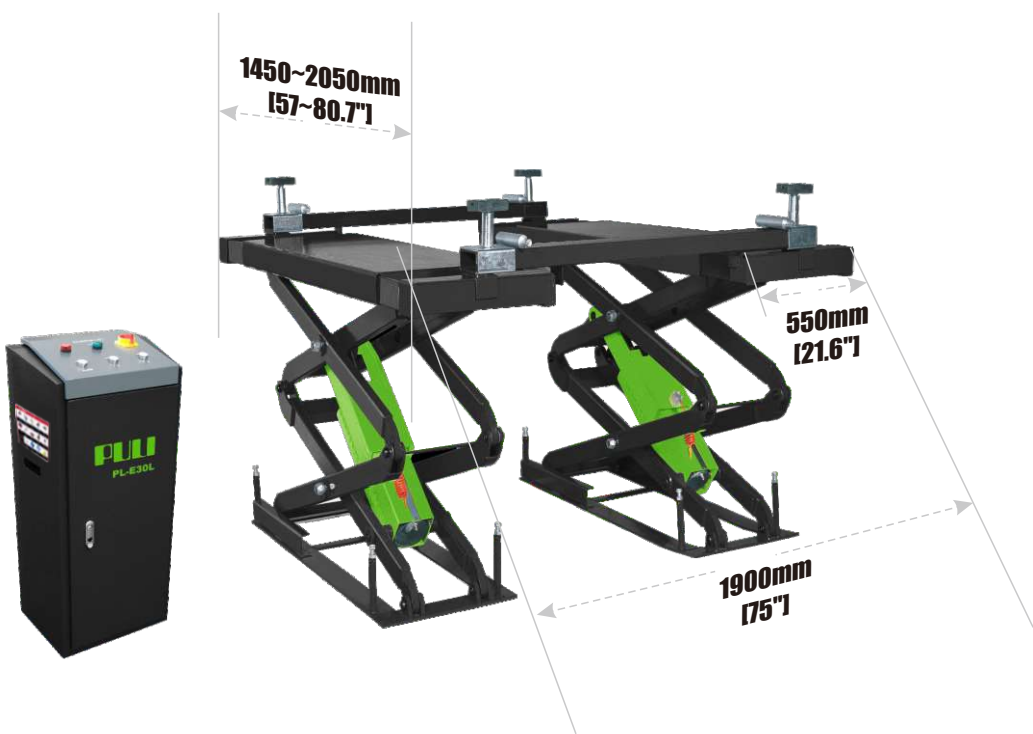

≤3000/3500kg
(6614/7716 lbs)

Lifting capacity

≤2050mm
(80")

Lifting height

≤330mm
(13")

Min height


55 S

Lifting time

55 S

Dropping time

DIMENSION OVERVIEW

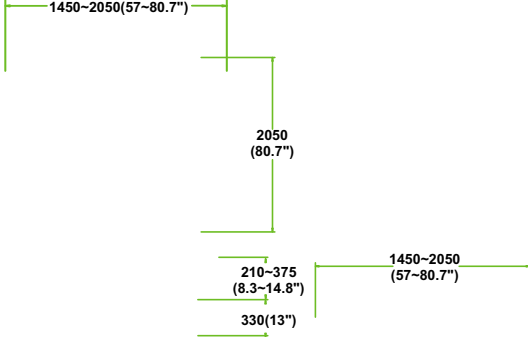


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-E30C/E35C

FULL RISE SCISSOR LIFT WITH LIFTING TRAY, IN-GROUND MOUNTED

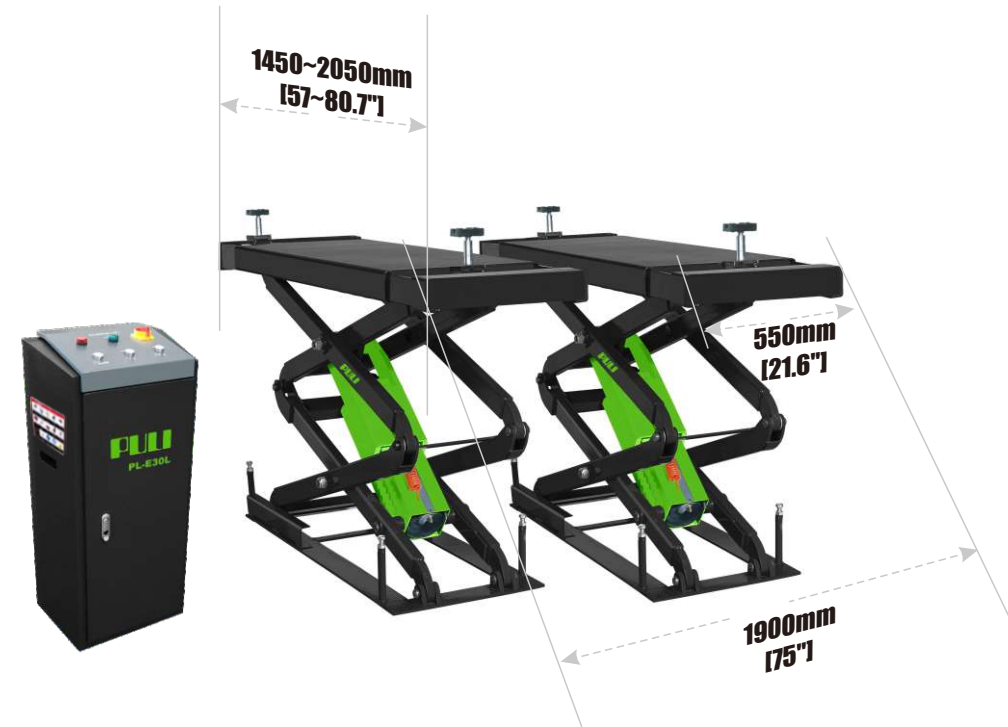

≤3000/3500kg
(6614/7716 lbs)

Lifting capacity

≤2050mm
(80")

Lifting height

≤330mm
(13")

Min height


55 S

Lifting time

55 S

Dropping time

DIMENSION OVERVIEW

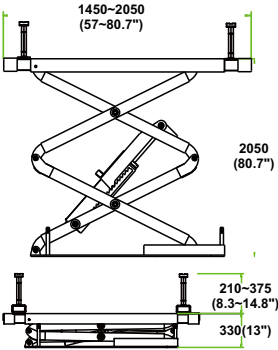


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-D35G

TRENCH RUNWAY SCISSOR LIFT

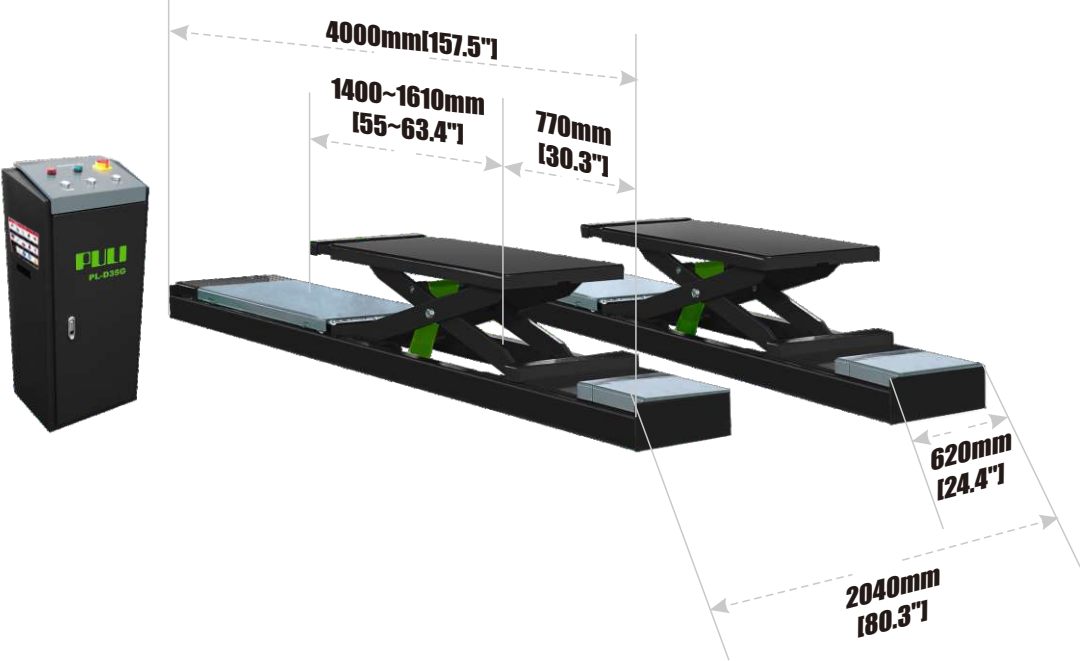

≤3500kg
(7716 lbs)

Lifting capacity

≤450mm
(17.7")

Lifting height

≤180mm
(7")

Min height


10 S

Lifting time

10 S

Dropping time

DIMENSION OVERVIEW

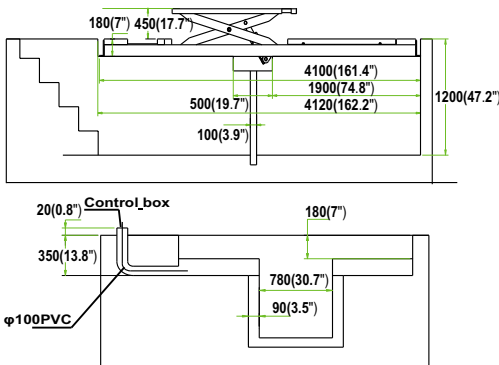

SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw


PL-P35/P45/P55

LARGE PLATFORM SCISSOR LIFT




MODEL	Lifting capacity	Lifting height	Min height	Lifting time	Dropping time
PL-P35	≤3500kg (7716 lbs)	≤1800mm (70.8")	330mm (13")	55 S	55 S
PL-P45	≤4500kg (9920 lbs)	≤1800mm (70.8")	330mm (13")	55 S	55 S
PL-P55	≤5500kg (12125 lbs)	≤1800mm (70.8")	380mm (380")	55 S	55 S

SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

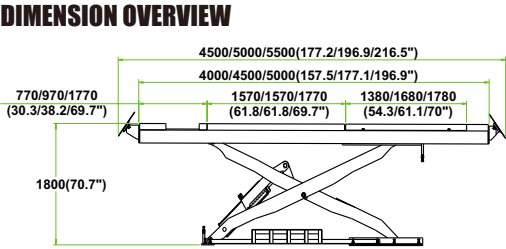


PL-C35/C45/C55

LARGE PLATFORM SCISSOR LIFT FOR FOUR WHEEL ALIGNMENT

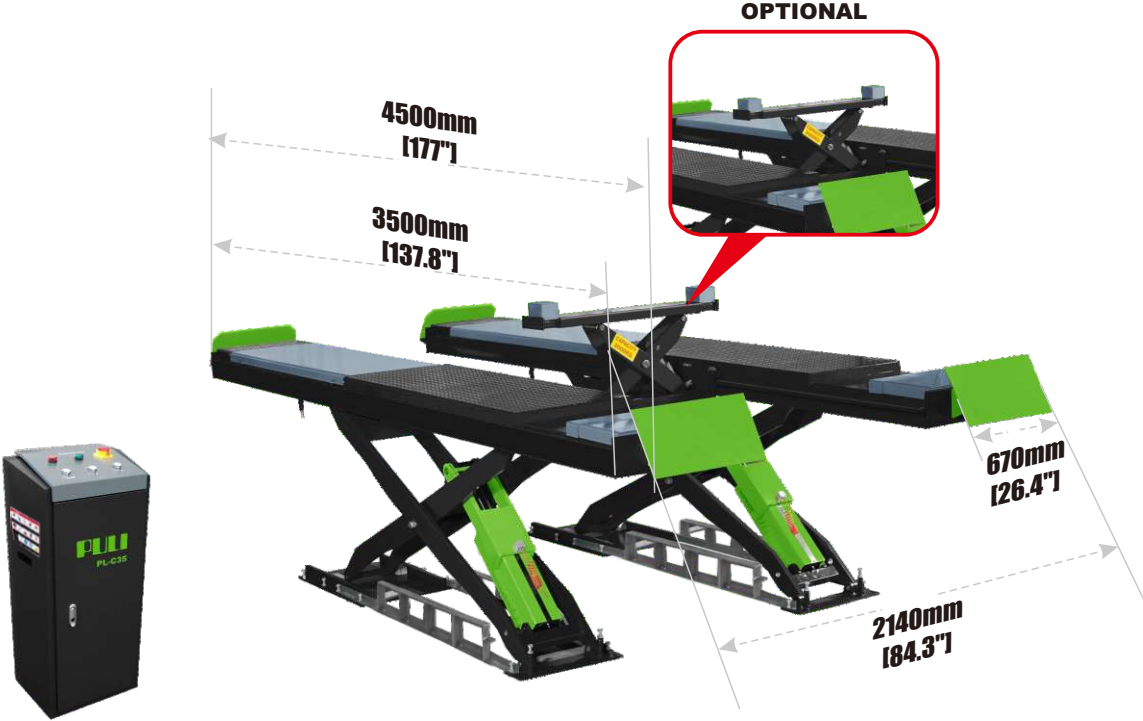


MODEL	Lifting capacity	Lifting height	Min height	Lifting time	Dropping time
PL-C35	≤3500kg (7716 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-C45	≤4500kg (9920 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-C55	≤5500kg (12125 lbs)	≤1850mm (72.8")	380mm (380")	55 S	55 S

SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

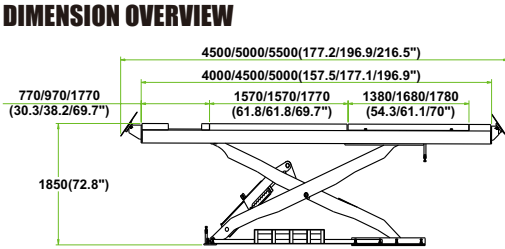

PL-Y35/Y35D/Y40/Y45


DOUBLE-LEVEL PLATFORM SCISSOR LIFT SUITABLE FOR FOUR WHEEL ALIGNMENT

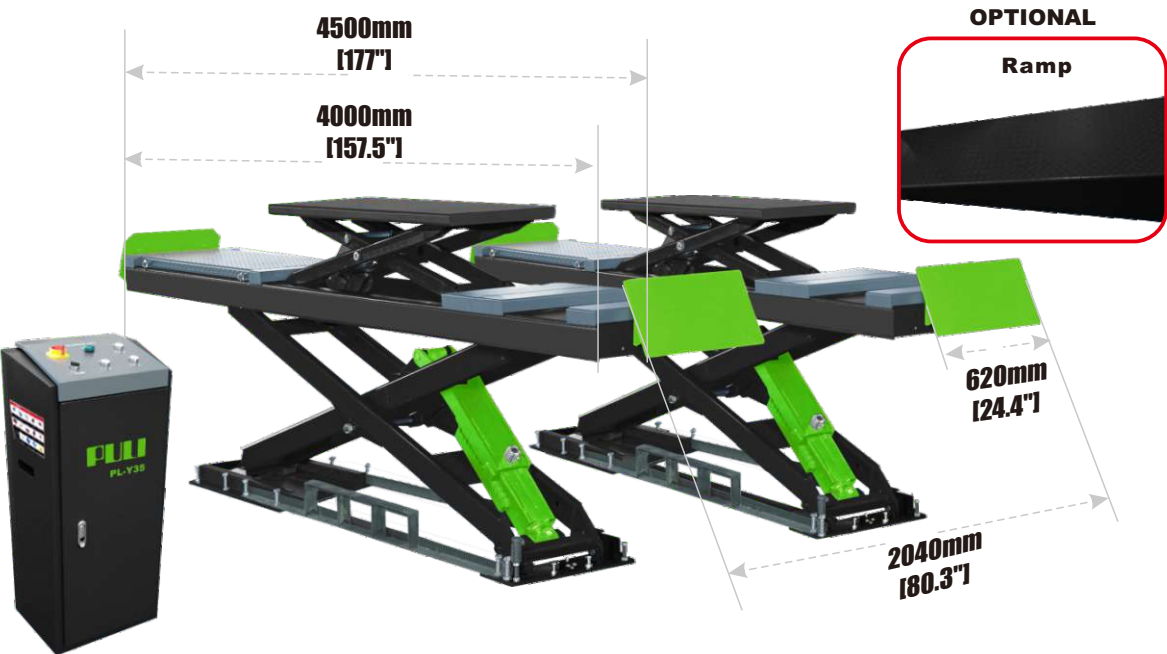

MODEL	Lifting capacity	Lifting height	Min height	Lifting time	Dropping time
PL-Y35	≤3500kg (7716 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-Y35D	≤3500kg (7716 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-Y40	≤4000kg (8818.5 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-Y45	≤4500kg (9920.8 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S


SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

DIMENSION OVERVIEW

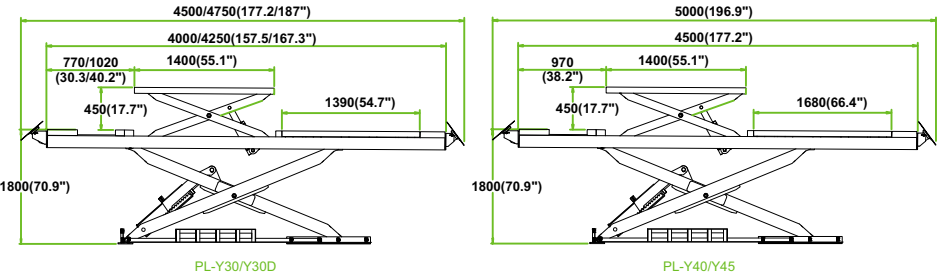

PL-D35/D35D/D45/D55


DOUBLE-LEVEL PLATFORM SCISSOR LIFT SUITABLE FOR FOUR WHEEL ALIGNMENT

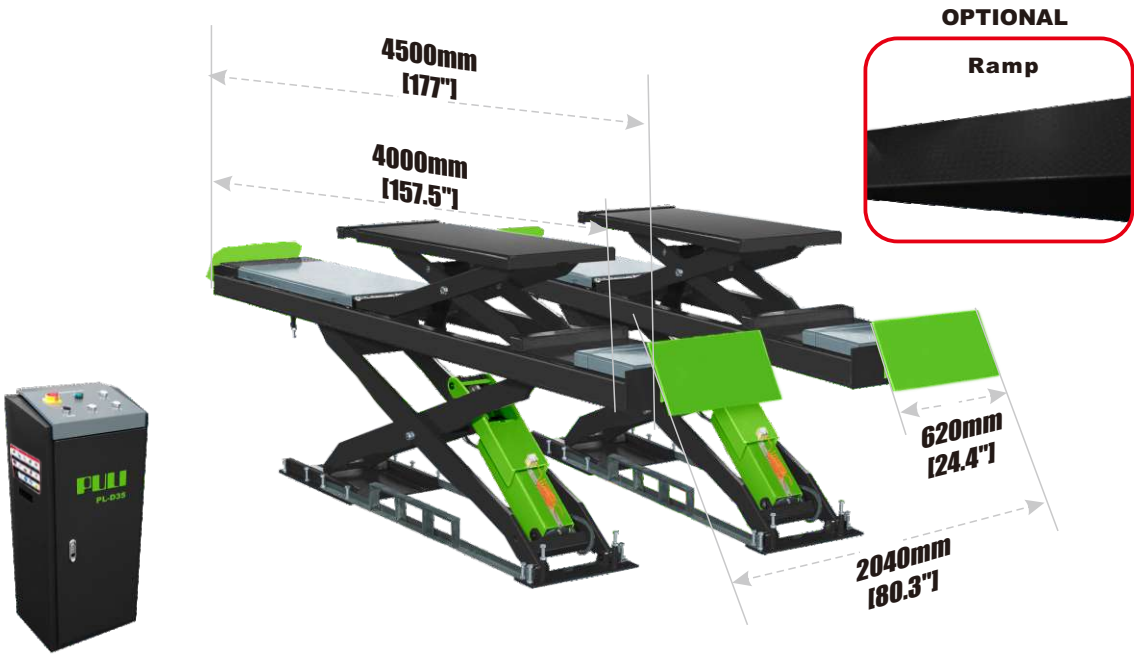

MODEL	Lifting capacity	Lifting height	Min height	Lifting time	Dropping time
PL-D35	≤3500kg (7716 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-D35D	≤3500kg (7716 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-D45	≤4500kg (9920 lbs)	≤1850mm (72.8")	330mm (13")	55 S	55 S
PL-D55	≤5500kg (12125 lbs)	≤1850mm (72.8")	380mm (38")	55 S	55 S


SPECIFICATIONS
Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

DIMENSION OVERVIEW

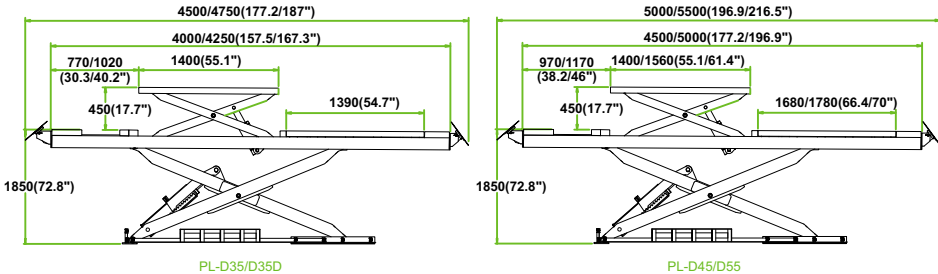

PL-D35H/D45H

DOUBLE-LEVEL PLATFORM SCISSOR LIFT SUITABLE FOR FOUR WHEEL ALIGNMENT

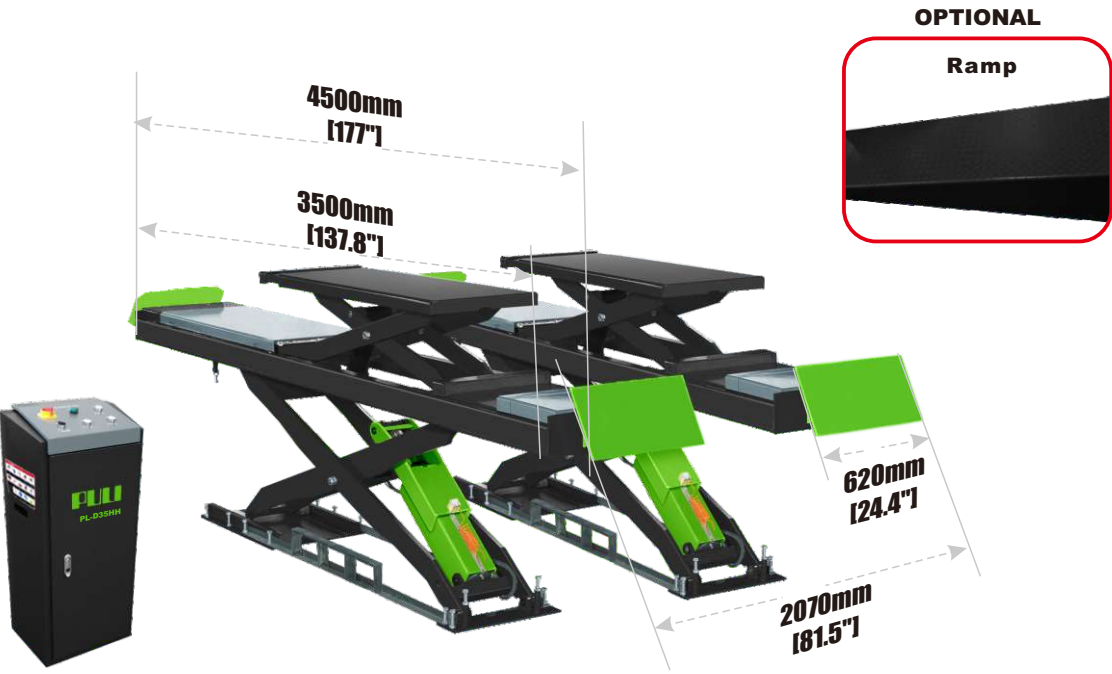

≤3500/4500kg
(7716/9920.8 lbs)

Lifting capacity

≤2200mm
(86.6")

Lifting height

≤380mm
(15")

Min height


55 S

Lifting time

55S

Dropping time

DIMENSION OVERVIEW

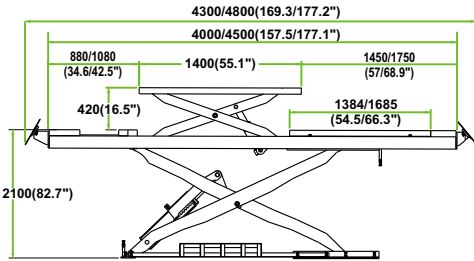


SPECIFICATIONS


Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-D35B/D40B

LARGE PLATFORM PROFILE SCISSOR LIFT FOR FOUR WHEEL ALIGNMENT

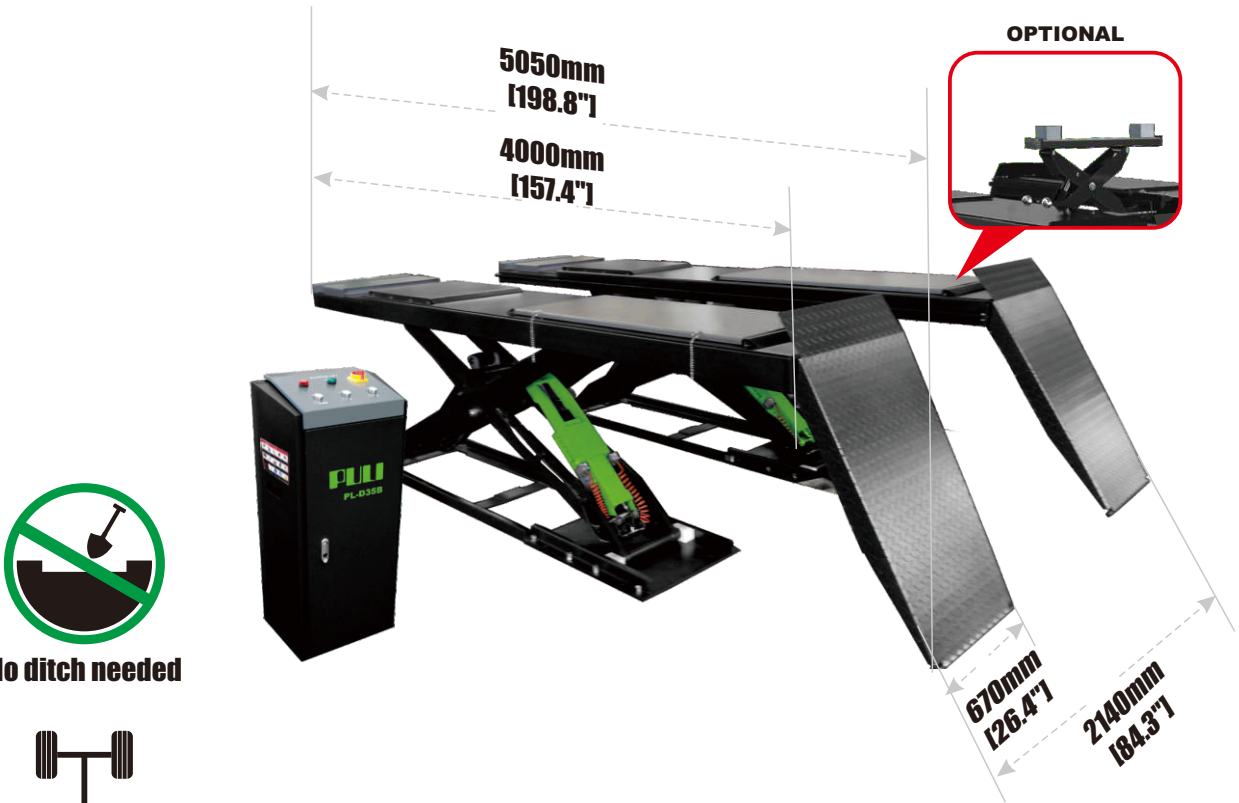

No ditch needed



Four wheel alignment function

≤3500/4000kg
(7716/8818 lbs)

Lifting capacity

≤1700/1850mm
(66.9/73")

Lifting height

≤180mm
(7")

Min height


55 S

Lifting time

55S

Dropping time

DIMENSION OVERVIEW

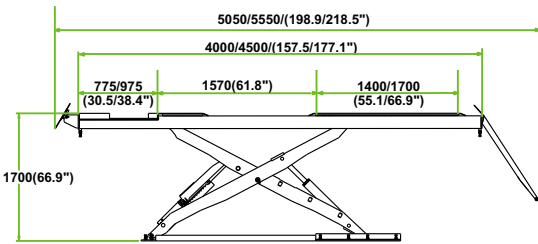


SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-S40

DOUBLE-LEVEL PLATFORM LOW PROFILE SCISSOR LIFT SUITABLE FOR FOUR WHEEL ALIGNMENT

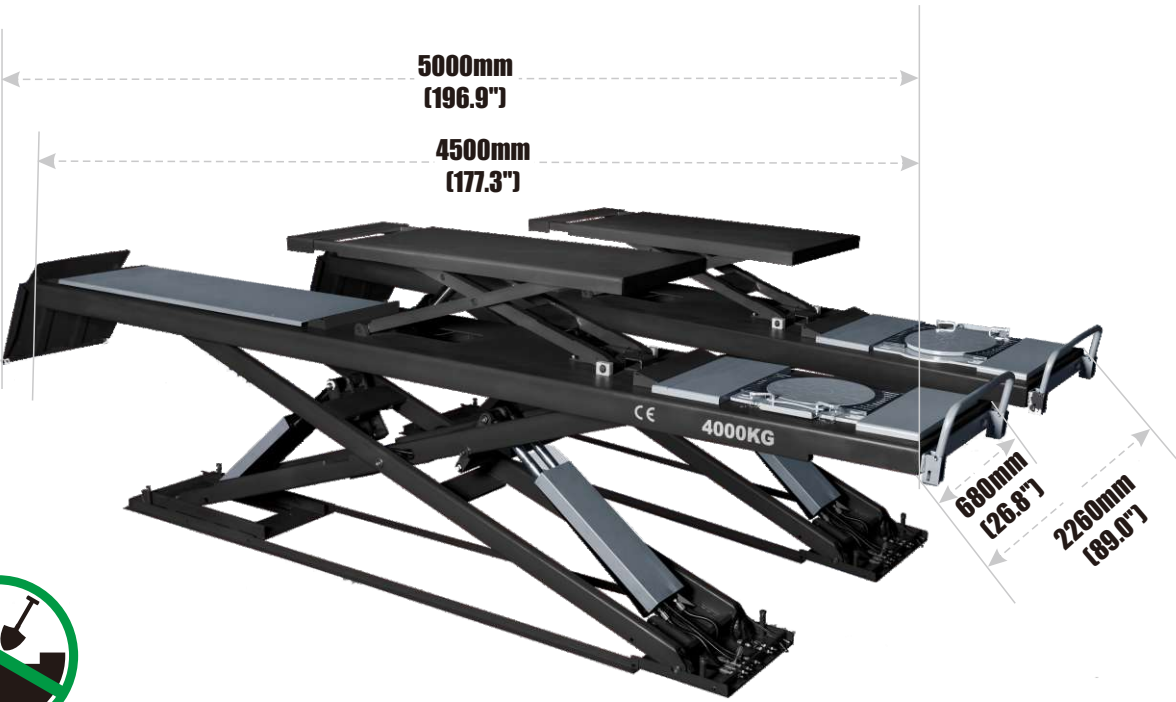

No ditch needed



Four wheel alignment function

≤4000kg
(8840 lbs)

Lifting capacity

≤1850mm
(72.9")

Lifting height

≤2830mm
(111")

Max car width

128mm
(4.7")

Min height


75 S

Lifting time

60 S

Dropping time

USE RANGE OF TELESCOPIC LIFTING ARM

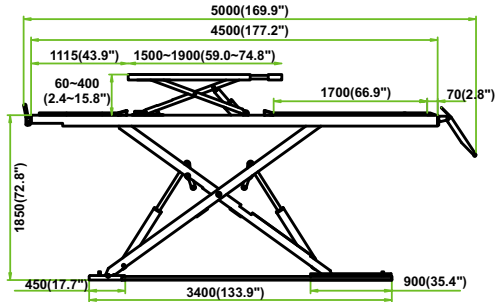

SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
Motor power 2.2 kw

PL-X20D/X30D PL-X20Q/X30Q PL-X20S/X30S

THE SECONDARY LIFTING JACK

MODEL

PL-X20D

PL-X30D

Lifting capacity

≤2000kg
(4409 lbs)

≤3000kg
(6614 lbs)

Lifting height

≤490mm
(19.3")

≤490mm
(19.3")

Min height

≤230mm
(9")

≤230mm
(9")

Lifting time

5S

5 S

Dropping time

10 S

10 S

880~1370mm
(34.6~53.9")

MODEL

PL-X20Q

PL-X30Q

Lifting capacity

≤2000kg
(4409 lbs)

≤3000kg
(6614 lbs)

Lifting height

≤490mm
(19.3")

≤490mm
(19.3")

Min height

≤230mm
(9")

≤230mm
(9")

Lifting time

5S

5 S

Dropping time

10 S

10 S

880~1370mm
(34.6~53.9")

MODEL

PL-X20S

PL-X30S

Lifting capacity

≤2000kg
(4409 lbs)

≤3000kg
(6614 lbs)

Lifting height

≤490mm
(19.3")

≤490mm
(19.3")

Min height

≤230mm
(9")

≤230mm
(9")

Lifting time

5S

5 S

Dropping time

10 S

10 S

880~1370mm
(34.6~53.9")

MOTORCYCLE LIFT



PL-M01/PL-M02/PL-M04






MOTORCYCLE LIFT



PL-M01




PL-M02
PL-M04

MODEL	 Lifting capacity	 Lifting height	 Platform length	 Platform height	 Lifting speed	 Dropping speed
PL-M01	≤300kg (663 lbs)	≤1200mm (47")	≤1800mm (70.9")	180mm (7")	25 S	25 S
PL-M02	≤500kg (1102 lbs)	≤1200mm (47")	≤2480mm (97.6")	200mm (7.9")	35 S	35 S
PL-M04	≤1000kg (2204.6 lbs)	≤1200mm (47")	≤2480mm (97.6")	200mm (7.9")	35 S	35 S

SPECIFICATIONS

Optional power supply 110v/220v/230v/240v (1ph)
Motor power 0.75 kw

Overall dimensions

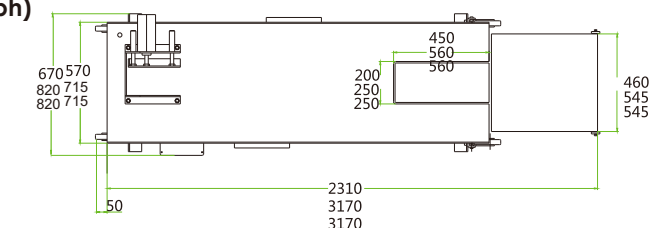

PL-MT03/MT04/MT05

MOTORCYCLE LIFT



MODEL	Lifting capacity	Lifting height	Min height	G.W / N.W	Packgae size cm(inch)	QTY/20'CY
PL-MT03	≤362kg (800 lbs)	≤680mm (27 inch)	≤180mm (7 inch)	126/104kg (278/230lb)	198*58*26 (78*23*10)	80
PL-MT04	≤452kg (1000 lbs)	≤780mm (31 inch)	≤180mm (7 inch)	148/123kg (327/272lb)	217*61*28 (86*24*11)	72
PL-MT05	≤452kg (1000 lbs)	≤760mm (30 inch)	≤220mm (9 inch)	160/135kg (354/298lb)	206*74*28 (81*29*11)	56



COMBINED MOVABLE
VEHICLE LIFTER



PL-S5.0T/PL-S7.5T

COMBINED MOVABLE VEHICLE LIFTER



MODEL	 Lifting capacity	 Lifting height	 Lifting speed	 Packgae size cm(")	 Single post weight	Power (kw)
PL-S5.0T	≤5000kg (11050 lbs)	≤1500mm (59")	≤0.6m/min	112*110*260 (44*43*10)	580 (1282 lbs)	3
PL-S7.5T	≤7500kg (16575 lbs)	≤1500mm (59")	≤0.6m/min	112*110*260 (44*43*10)	800 (1768 lbs)	4

SPECIFICATIONS
Optional power supply 380v(3ph)
Control voltage 24s