

PULI



GUANGZHOU JINGJIA AUTO EQUIPMENT CO., LTD.

Tel: 86-20-36350276/86274345/86274256/86271343/86271992

Fax: 86-20-36747055

[Http://www.chinapuli.com](http://www.chinapuli.com)

E-mail: export@chinapuli.com

2019 VEHICLE LIFTS

**AUTOMOTIVE SERVICE
EQUIPMENT MANUFACTURER**

COMPANY INTRODUCTION

GUANGZHOU JINGJIA AUTO EQUIPMENT CO.,LTD. with its well recognized brand **PULI** has been explored in the global auto lifts and tire service market for more than 20 years. The lift and tire service equipments with the brand **PULI** stand for market oriented and safe. We focus on the consumption needs to help you to open the market with reliable and high quality products. All are aim to provide the best service and a better choice to you. Stand with us, Stay profitable.



PULI is the force that brings every one of us together, like each drop of water that can be formed as a river, an ocean, we join and unite to fulfill our dreams.

CONTENTS 目录

07-08	TWO POST LIFT
09-10	双柱系列
11-12	PL-3.5-2B PL-4.0-2B PL-3.5-2E PL-4.0-2E
13-14	PL-3.8-2A PL-4.0-SW
15-16	PL-4.0-2A PL-4.0-2ET
17-18	PL-4.0-EF
19-20	PL-4.0-2D PL-4.0-2DE
21-22	PL-4.0-2DU PL-4.0-2DUS
	PL-4.0-2DA PL-4.0-2DB
	PL-4.0-2DEA PL-4.0-2DEB
	LARGE PLATFORM SCISSOR LIFT
	大剪系列
23-24	PL-P35 P45 P55
25-26	PL-C35 C45 C55
27-28	PL-Y35 Y35D Y40
29-30	PL-D35 D35C D35D D35H
31-32	PL-D45 D45C D45H
33-34	PL-D55 D55H
35-36	PL-D35B D40B
	SMALL PLATFORM SCISSOR LIFT
	小剪系列
37-38	PL-H25 PL--H45
39-40	PL-H30M PL--H45M
41-42	PL-Z25M PL--Z30M
43-44	PL-Z30 PL--Z30Y
45-46	PL-B30 PL-B30Y
47-48	PL-E30 E30L E30C
49-50	PL-E35 E35L E35C
51-52	PL-DP5
53	PL-H25A
	ROLLING JACK
	二次举升小车
54	PL-X20TD PL-X20TQ PL-X20TS
	PL-X30TD PL-X30TQ PL-X30TS
	MOTORCYCLE LIFT
	摩托车系列
55-56	PL-M01 PL-M02 PL-M04
57-58	PL-M03 PL-M09
59-60	PL-M08 PL-M10
	FOUR POST LIFT
	四柱系列
61-62	PL-FS35 FS35D FS40 FS45 FS50 FS55
63-64	PL-F35 F40 F45 F50 F55

AUTOMATED FACTORY

自动化工厂

With the new automated production equipment and production lines, as well as the lean manufacturing system, we are expressing our targets of "high efficiency" and "innovation".

随着新自动化设备和生产线的引进,工厂在新一轮改革中全面实行精益生产。

AUTOMATED FACTORY



LARGE CNC LASER CUTTING MACHINE
大型激光切割机



PRECISION MANUFACTURING
精密加工



Achieving accuracy tolerance of $\pm 0.1\text{mm}$
精密切割，精度可达到0.1mm



CNC MACHINING CENTER
CNC 加工中心



BENDING MACHINE
大型自动折弯机



Touchless
无需人力操作



PAINT COATING LINE
喷涂生产线



SCISSOR LIFT ASSEMBLY LINE
剪式举升机组装线



WELDING ROBOT ARMS
焊接机械手



CUTTING WORKSHOP
切割车间

PL-3.5-2B/4.0-2B PL-3.5-2E/4.0-2E



(CE: ONLY FOR PL-4.0-2E)

Floor Cover Plate Two Post Vehicle Lift

底板双柱举升机

PL-3.5-2B/4.0-2B



Dual Manual Lock Release
双边手动解锁



PL-3.5-2E/4.0-2E



Electric Lock Release
电动解锁




Electromagnetic Lowering
电磁下降



Made according to CE norms
按照CE标准制造

STANDARD 标准配置



Adjustable lifting pad to two(2) heights
可调橡胶托垫2节高度



Two stage arm
2节臂



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Chain protector
防脱链装置




Foot Protection Device
防压脚装置



Arm pad
托臂垫



Height limit switch
上限位开关



Dust protection
防尘布
(Standard: PL-3.5-2E / PL-4.0-2E)



Longer two stage arm & three-stage arm
加长2节臂、3节臂



Adapters
增高柱
4 PCS

SAFETY FEATURES 安全特点




① Car door protection
车门保护垫



② Arm lock
托臂锁

DIMENSION 尺寸参数

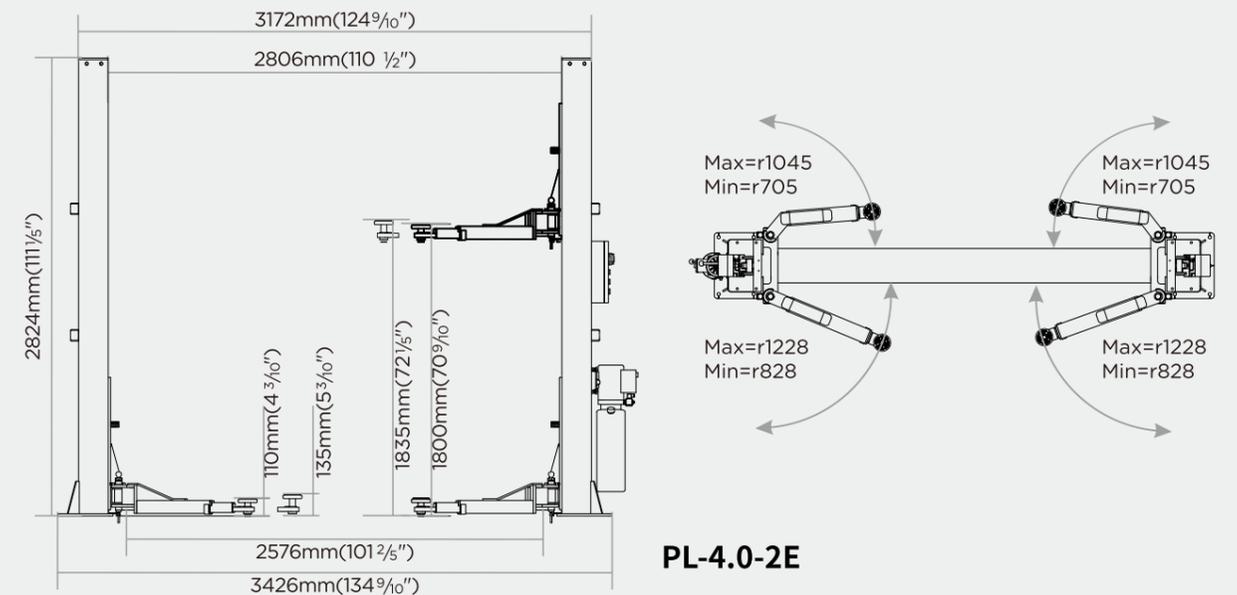

TECHNICAL DATA 技术参数

MODEL 型号	PL-3.5-2B/4.0-2B	PL-3.5-2E/4.0-2E
Capacity 举升重量	3.5Ton/4.0 Ton	3.5Ton/4.0 Ton
Lifting height 举升高度	1800mm(70 9/10")	1800mm(70 9/10")
Min height 托臂高度	110mm(4 3/10")	110mm(4 3/10")
Max car width 通车宽度	2576mm(101 2/5")	2576mm(101 2/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 28 units/20' CTNR 2910*520*770mm (562 kg/units)	Loading QTY : 28 units/20' CTNR 2910*520*770mm (562 kg/units)

PL-3.8-2A PL-4.0-SW

Arch Type Clear Floor Two Post Vehicle Lift

龙门双柱举升机



PL-3.8-2A



Dual Manual Lock Release
双边手动解锁

2 Steps column design
分体式柱体结构



PL-4.0-SW




Single Manual Lock Release
单边手动解锁

2 Steps column design
分体式柱体结构



STANDARD 标准配置



Adjustable lifting pad to two(2) heights
可调橡胶托垫2节高度



Two stage arm
2节臂

OPTIONAL 可选配置



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Chain protector
防脱链装置



Foot Protection Device
防压脚装置



Arm pad
托臂垫



Dust protection
防尘布




Longer two stage arm & three-stage arm
加长2节臂、3节臂



Adapters
增高柱

SAFETY FEATURES 安全特点



① Top beam design
车顶防撞设计




② Car door protection
车门保护垫



③ Arm lock
托臂锁

DIMENSION 尺寸参数

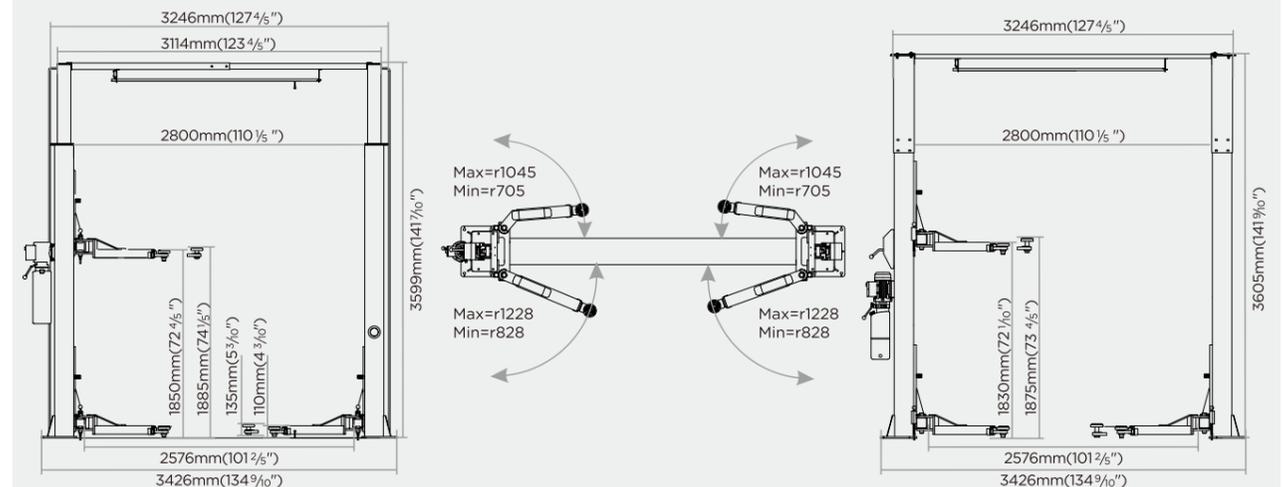

PL-3.8-2A

PL-4.0-SW

TECHNICAL DATA 技术参数

MODEL 型号	PL-3.8-2A	PL-4.0-SW
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1850mm(72 4/5")	1830mm(72 1/16")
Min height 托臂高度	110mm(4 3/16")	110mm(4 3/16")
Max car width 通车宽度	2576mm(101 3/8")	2576mm(101 3/8")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 28 units/20' CTNR 2940*460*750mm (600 kg/units)	Loading QTY : 28 units/20' CTNR 2940*460*750mm (620 kg/units)

PL-4.0-2A PL-4.0-2ET

Arch Type Clear Floor Two Post Vehicle Lift

龙门双柱举升机



(CE: ONLY FOR PL-4.0-2ET)

PL-4.0-2A



Dual Manual Lock Release
双边手动解锁



PL-4.0-2ET



Electric Lock Release
电动解锁




Electromagnetic Lowering
电磁下降



Made according to CE norms
按照CE标准制造

STANDARD 标准配置



Adjustable lifting pad to two(2) heights
可调橡胶托垫2节高度



Two stage arm
2节臂

OPTIONAL 可选配置



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Chain protector
防脱链装置



Foot Protection Device
防压脚装置



Arm pad
托臂垫



Dust protection
防尘布




Longer two stage arm & three-stage arm
加长2节臂、3节臂



Adapters
增高柱

SAFETY FEATURES 安全特点



① Top beam design
车顶防撞设计




② Car door protection
车门保护垫



③ Arm lock
托臂锁

DIMENSION 尺寸参数

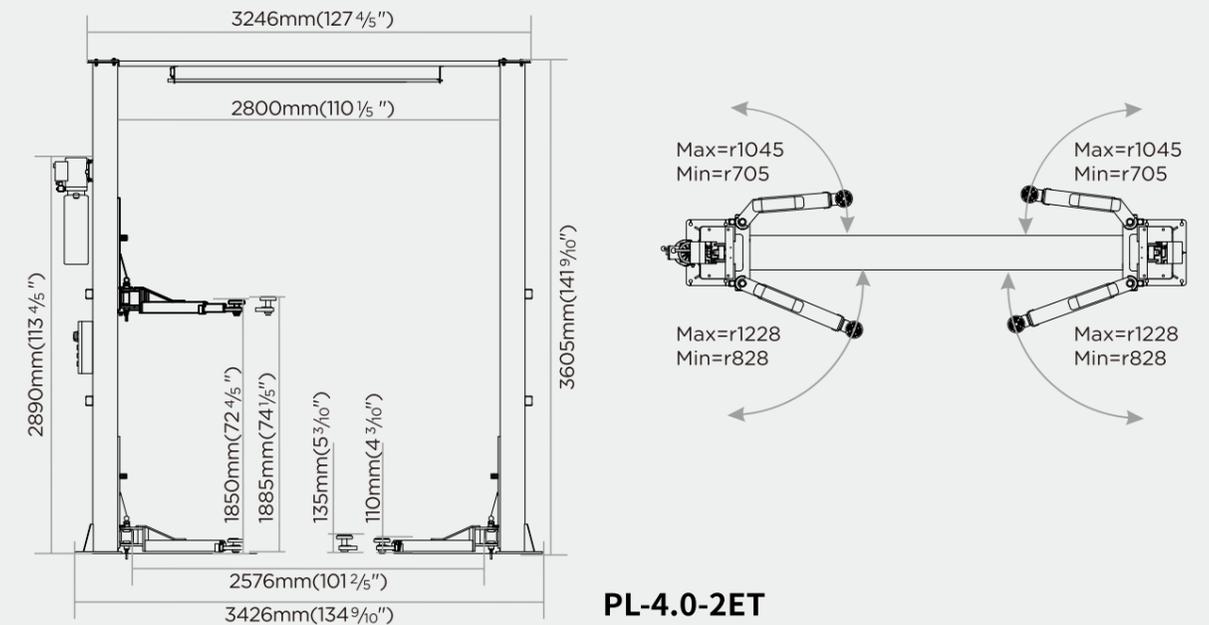

PL-4.0-2ET

TECHNICAL DATA 技术参数

MODEL 型号	PL-4.0-2A	PL-4.0-2ET
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1850mm(72 4/5")	1850mm(72 4/5")
Min height 托臂高度	110mm(4 3/10")	110mm(4 3/10")
Max car width 通车宽度	2576mm(101 2/5")	2576mm(101 2/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 15 units/20' CTNR 3700*550*760mm (600 kg/units)	Loading QTY : 15 units/20' CTNR 3700*550*760mm (600 kg/units)

PL-4.0-EF

True Asymmetric Clear Floor Two Post Vehicle Lift

真不对称龙门式双柱举升机



PL-T40EF



Electric Lock Release
电动解锁



Electromagnetic Lowering
电磁下降




Made according to CE norms
按照CE标准制造



SAFETY FEATURES 安全特点



1 Optimum door clearance with asymmetric lifting arm
非对称式设计, 保证车门的打开角度




2 Top beam design
车顶防撞设计




3 Height limit switch
上限位开关




4 Arm pad
托臂垫




5 Automatic all-steel arm-locking device
全自动全钢锁臂装置



6 Foot Protection Device
防压脚装置



Reverse pulling cylinder
倒置油缸设置



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Synchronization cables
同步钢丝绳



High strength safety lock
高强度安全锁


STANDARD 标准配置



Aluminum motor
铝电机, 耐用, 散热好



Adjustable lifting pad to three(3) heights
可调橡胶托垫3节高度



Three stage arms & Two stage arms
3节臂 & 2节臂




Adapters
增高柱



Optional:Adapters
(选配) 增高柱

DIMENSION 尺寸参数

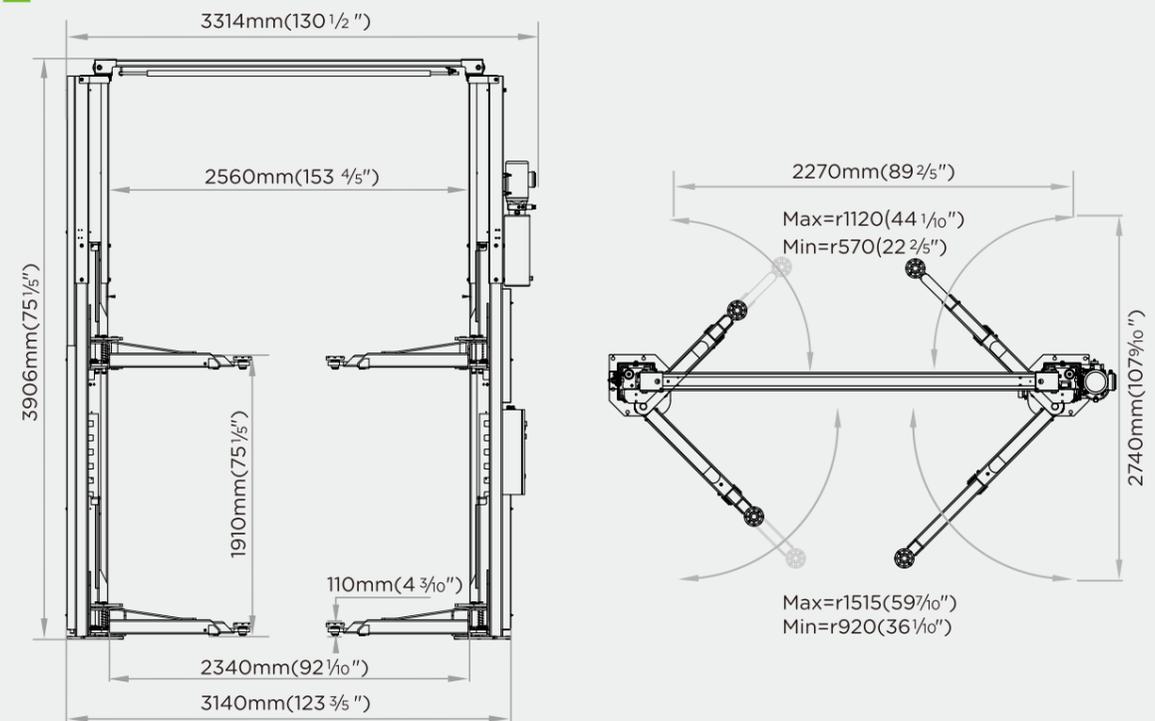

TECHNICAL DATA 技术参数

MODEL 型号	PL-4.0-EF
Capacity 举升重量	4.0 Ton
Lifting height 举升高度	1910mm(75 1/5")
Min height 托臂高度	110mm(4 3/10")
Max car width 通车宽度	2340mm(92 1/10")
Power supply 电源功率	380V 50Hz 3PH 3.0kw
Shipping Information 装运信息	Loading QTY : 24 units/20' CTNR 2940*720*520mm (720 kg/units)

PL-4.0-2D PL-4.0-2DE

Floor Cover Plate Two Post Vehicle Lift

底板双柱举升机



(CE: ONLY FOR PL-4.0-2DE)

PL-4.0-2D



Dual Manual Lock Release
双边手动解锁




PL-4.0-2DE



Electric Lock Release
电动解锁



Electromagnetic Lowering
电磁下降

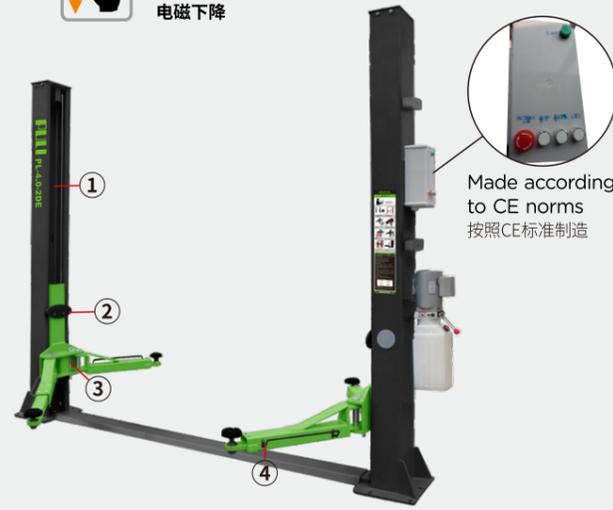

Made according to CE norms
按照CE标准制造


SAFETY FEATURES 安全特点



1 Height limit switch
上限位开关
(Standard: PL-4.0-2DE)




2 Car door protection
车门保护垫



3 Automatic all-steel arm-locking device
全自动全钢锁臂装置



4 Foot Protection Device
防压脚装置



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Chain protector
防脱链装置

STANDARD 标准配置



Adjustable lifting pad to two(2) heights
可调橡胶托垫2节高度



Two stage arm
2节臂


OPTIONAL 可选配置




Adapters
增高柱



Arm pad
托臂垫




Dust protection
防尘布
(Standard: PL-4.0-2DE
Optional: PL-4.0-2D)



Longer two stage arm & three-stage arm
加长2节臂、3节臂

DIMENSION 尺寸参数

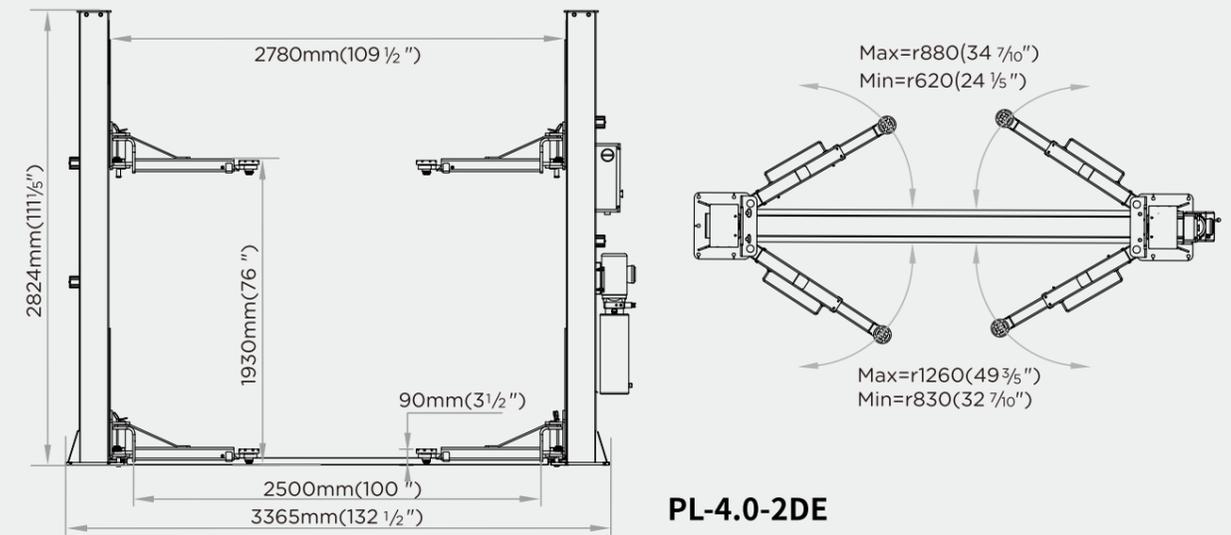

TECHNICAL DATA 技术参数

MODEL 型号	PL-4.0-2D	PL-4.0-2DE
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1930mm(76")	1930mm(76")
Min height 托臂高度	90mm(3 1/2")	90mm(3 1/2")
Max car width 通车宽度	2500mm(100")	2500mm(100")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 30 units/20' CTNR 2940*460*750mm (579 kg/units)	Loading QTY : 30 units/20' CTNR 2940*460*750mm (594 kg/units)

PL-4.0-2DU PL-4.0-2DUS

Floor Cover Plate Two Post Vehicle Lift

底板双柱举升机



(CE: ONLY FOR PL-4.0-2DUS)

PL-4.0-2DU



Dual Manual Lock Release
双边手动解锁

PL-4.0-2DUS



Single Manual Lock Release
单边手动解锁



Single Manual Lock Release
手动单边解锁装置

SAFETY FEATURES 安全特点



① Height limit switch
上限位开关

② Car door protection
车门保护垫


③ Automatic all-steel arm-locking device
全自动全钢锁臂装置

④ Foot Protection Device
防压脚装置

⑤ Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护

⑥ Chain protector
防脱链装置

STANDARD 标准配置

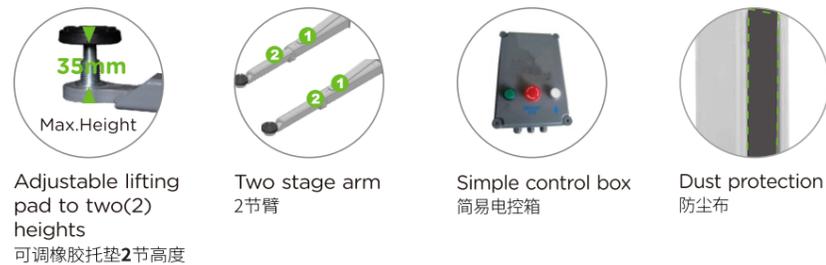

Adjustable lifting pad to two(2) heights
可调橡胶托垫2节高度

Two stage arm
2节臂

Simple control box
简易电控箱

Dust protection
防尘布

OPTIONAL 可选配置




Adapters
增高柱

Arm pad
托臂垫

Longer two stage arm & three-stage arm
加长2节臂、3节臂

DIMENSION 尺寸参数

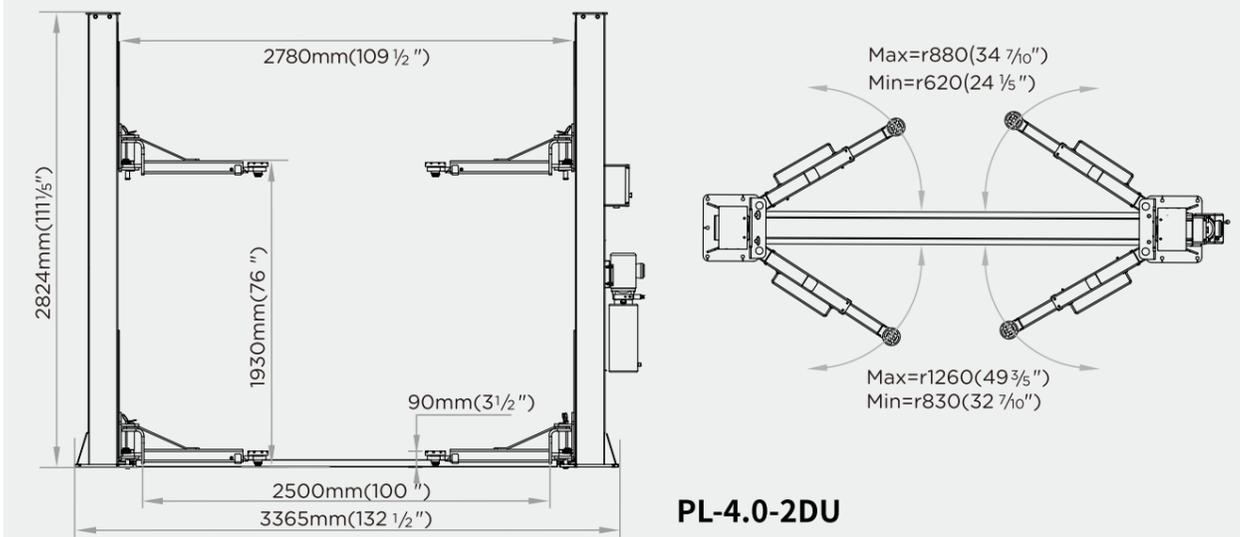

PL-4.0-2DU

TECHNICAL DATA 技术参数

MODEL 型号	PL-4.0-2DU	PL-4.0-2DUS
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1930mm(76")	1930mm(76")
Min height 托臂高度	90mm(3 1/2")	90mm(3 1/2")
Max car width 通车宽度	2500mm(100")	2500mm(100")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 30 units/20' CTNR 2940*460*750mm (585 kg/units)	Loading QTY : 30 units/20' CTNR 2940*460*750mm (585 kg/units)

PL-4.0-2DA PL-4.0-2DB


Arch Type Clear Floor Two Post Vehicle Lift

龙门双柱举升机



PL-4.0-2DA

Single piece column design
整体式柱体结构

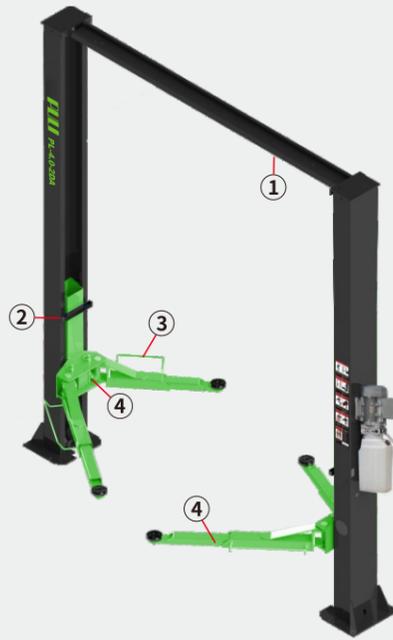

PL-4.0-2DB

2 Steps column design
分体式柱体结构




SAFETY FEATURES 安全特点




STANDARD 标准配置



OPTIONAL 可选配置

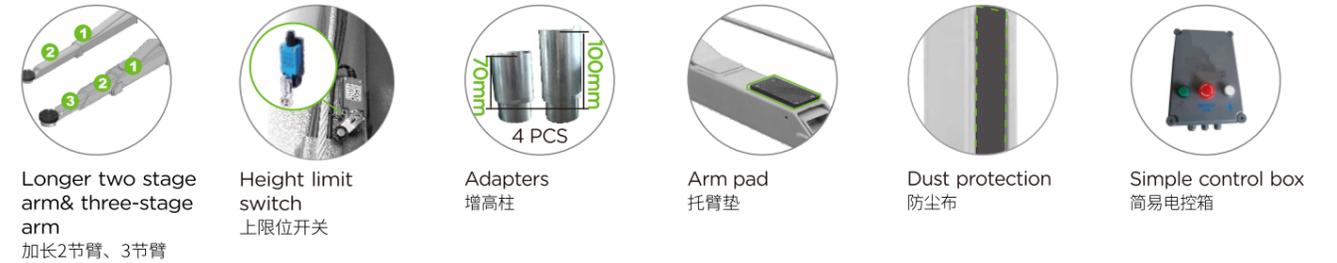

DIMENSION 尺寸参数

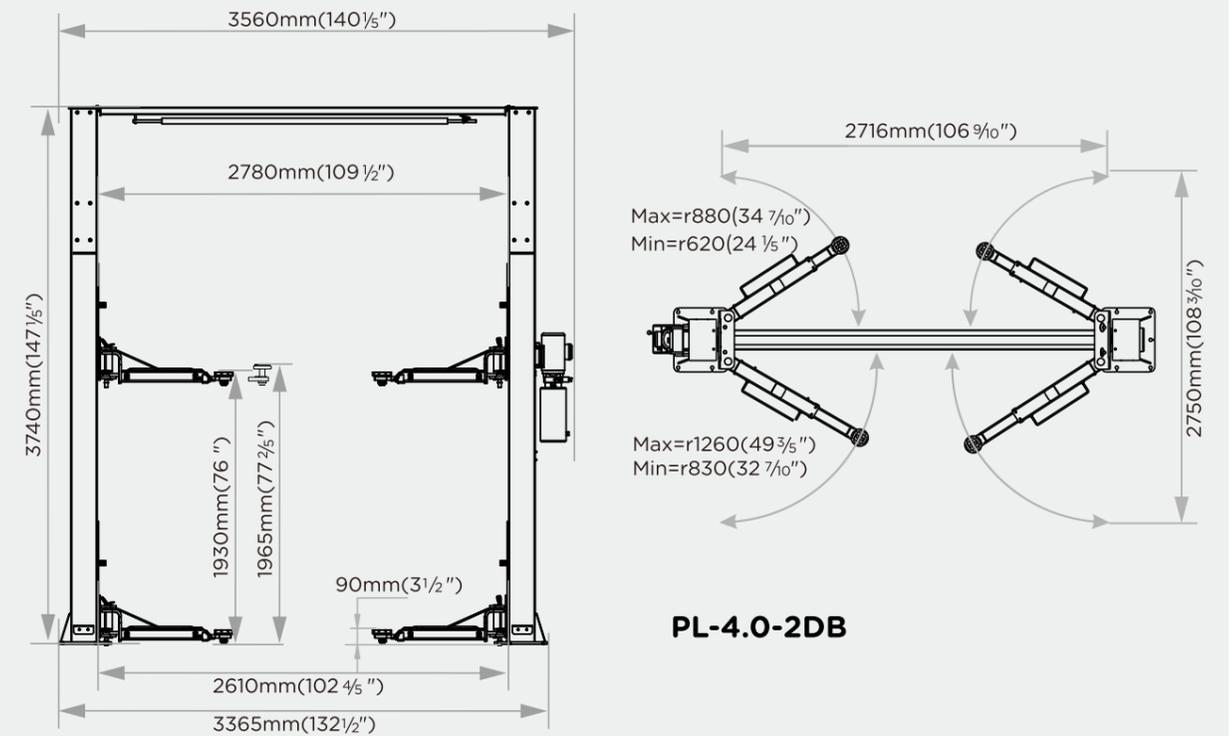

TECHNICAL DATA 技术参数

MODEL 型号	PL-4.0-2DA	PL-4.0-2DB
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1930mm(76")	1930mm(76")
Min height 托臂高度	90mm(3 1/2")	90mm(3 1/2")
Max car width 通车宽度	2610mm(102 4/5")	2610mm(102 4/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 15 units/20' CTNR 3890*460*750mm (643 kg/units)	Loading QTY : 30 units/20' CTNR 2940*460*750mm (643kg/units)

PL-4.0-2DEA PL-4.0-2DEB



Arch Type Clear Floor Two Post Vehicle Lift 龙门双柱举升机

PL-4.0-2DEA

Single piece column design
整体式柱体结构



PL-4.0-2DEB

2 Steps column design
分体式柱体结构



SAFETY FEATURES 安全特点




STANDARD 标准配置



OPTIONAL 可选配置



DIMENSION 尺寸参数

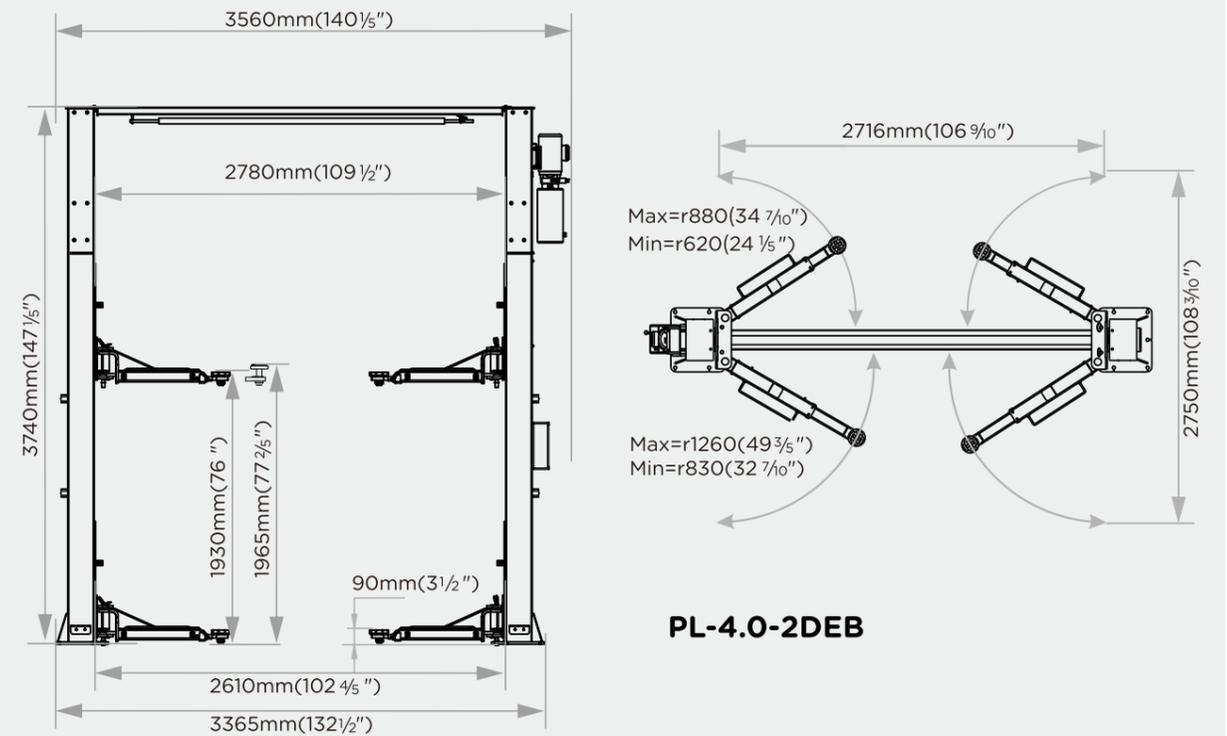

TECHNICAL DATA 技术参数

MODEL 型号	PL-4.0-2DEA	PL-4.0-2DEB
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1930mm(76")	1930mm(76")
Min height 托臂高度	90mm(3 1/2")	90mm(3 1/2")
Max car width 通车宽度	2610mm(102 4/5")	2610mm(102 4/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 15 units/20' CTNR 3890*460*750mm (648 kg/units)	Loading QTY : 30 units/20' CTNR 2890*460*750mm (643 kg/units)

PL-P35/P45/P55

Service Straight Platform Scissor Lift

平板大剪举升机



Built inner guide rails for rolling jack
预留二次小车内导轨

Pneumatic Lock Release
气动解锁

Electromagnetic Lowering
电磁下降

Rolling jack (OPTIONAL)

二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation
方便客户自行安装



Manual Control
手动小车



Pneumatic Control
气动小车



Electric Control
电动小车


P35 P45 --PL-X20TD/X20TS/X20TQ, P55 --PL-X30TD/X30TS/X30TQ
P35 P45 推荐PL-X20TD/X20TS/X20TQ, P55 推荐PL-X30TD/X30TS/X30TQ

OPTIONAL

可选配置



Photoelectric leveling
(选配) 光电水平



LED Lighting
(选配) LED灯条照明

SAFETY FEATURES 安全特点



Precision machined double sided safety teeth design
独特双边安全锁齿设计



Safety descending stop & alarm
二次下降, 近地骤停
警报提示




Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Height limit switch
高度限位开关

DIMENSION 尺寸参数

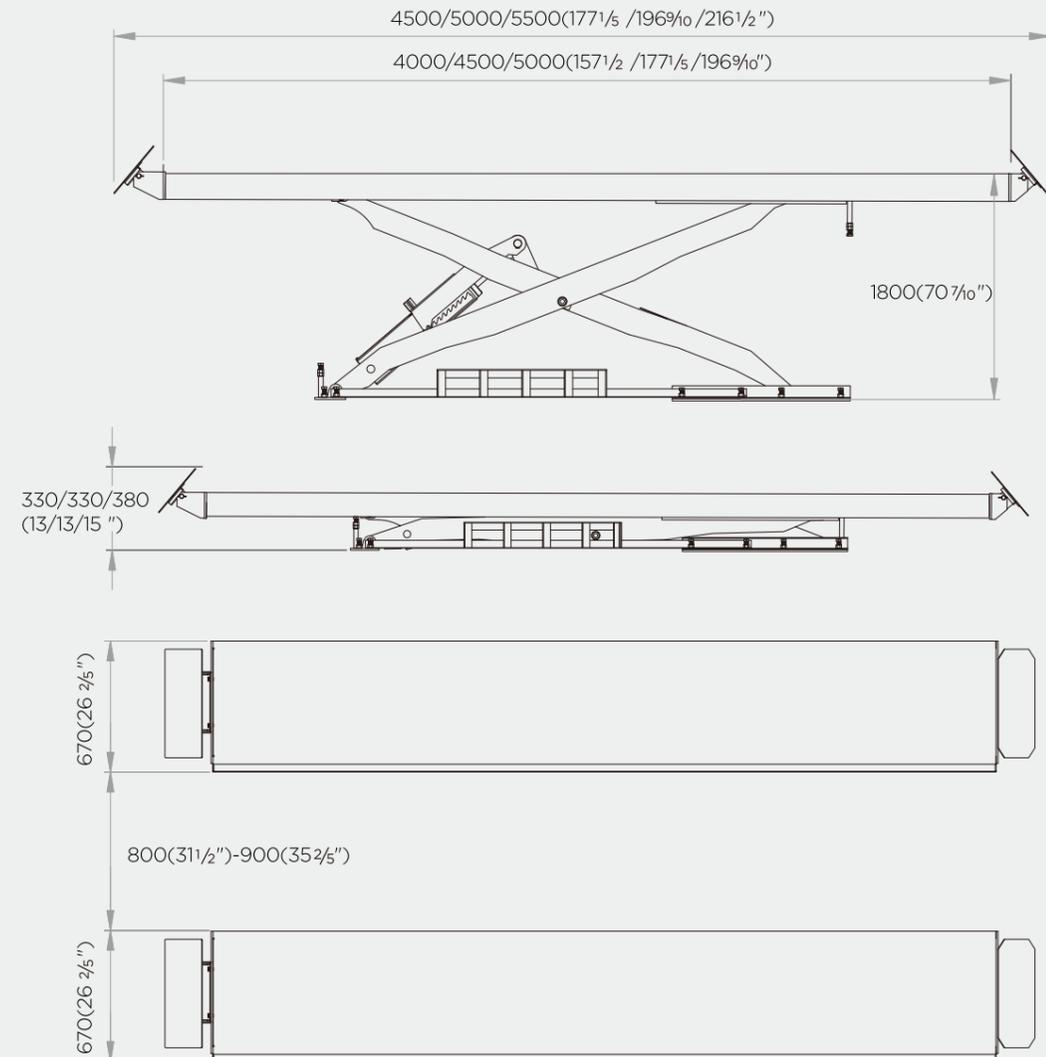

TECHNICAL DATA 技术参数

MODEL 型号	PL-P35 / P45	PL-P55
Capacity 举升重量	3.5 Ton / 4.5 Ton	5.5 Ton
Lifting height 举升高度	1800mm(70 ⁷ / ₁₀ "")	1800mm(70 ⁷ / ₁₀ "")
Min height 平台高度	330mm(13")	380mm(15")
Platform length 平台长度	4000mm(127 ¹ / ₂ "") / 4500mm(177 ¹ / ₅ "")	5000mm(196 ⁹ / ₁₀ "")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-C35/C45/C55

Wheel Alignment Scissor Lift

单层四轮定位大剪举升机



(OPTIONAL) Rolling jack
(选配) 二次小车

- Pneumatic Lock Release**
气动解锁
- Electromagnetic Lowering**
电磁下降
- For wheel alignment**
四轮定位

Rolling jack (OPTIONAL)

二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation
方便客户自行安装



Manual Control
手动小车



Pneumatic Control
气动小车



Electric Control
电动小车

C35 C45 --PL-X20TD/X20TS/X20TQ, C55 --PL-X30TD/X30TS/X30TQ
C35 C45 推荐PL-X20TD/X20TS/X20TQ, C55 推荐PL-X30TD/X30TS/X30TQ

OPTIONAL

可选配置




Position-adjustable turntable
(选配) 转角盘, 位置可调



Photoelectric leveling
(选配) 光电水平

DIMENSION 尺寸参数

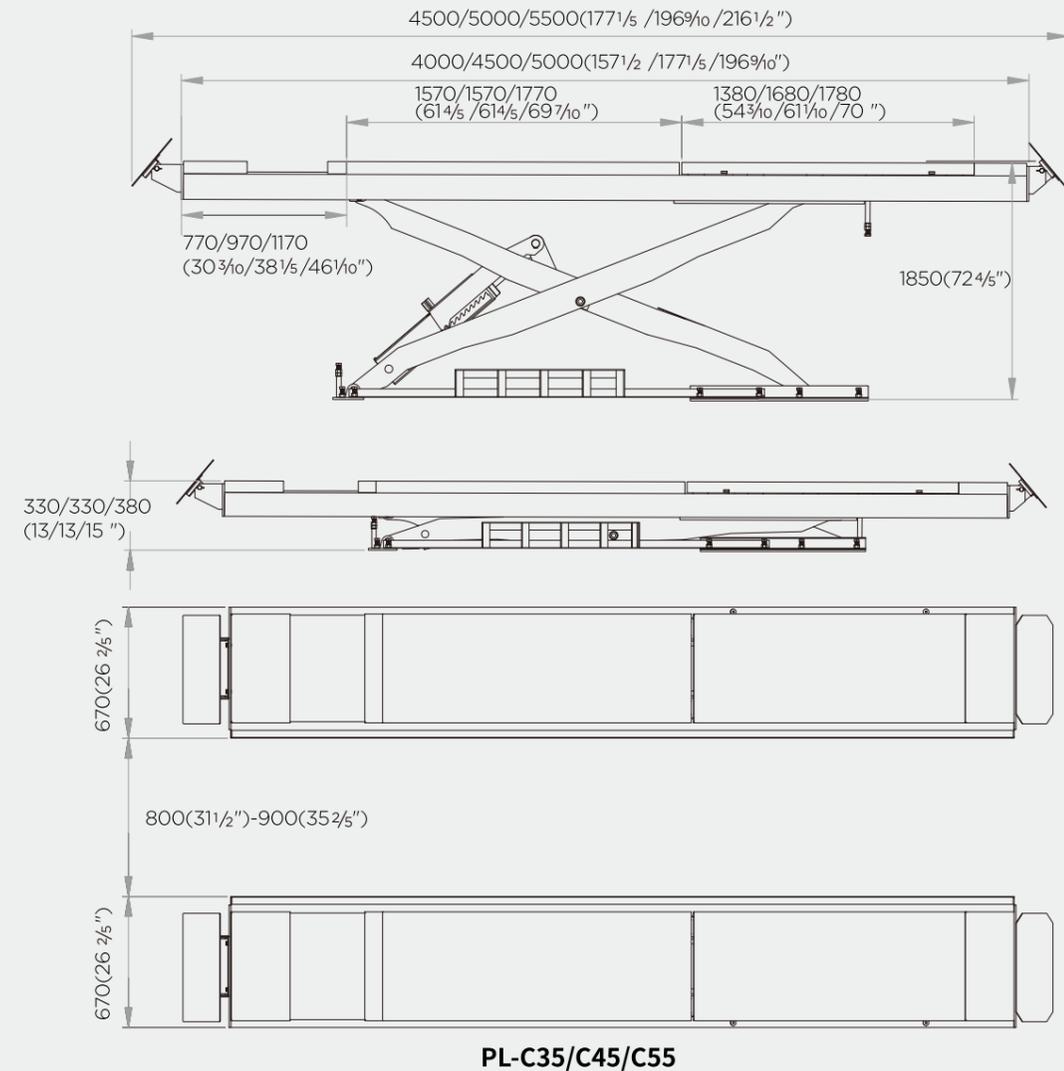

SAFETY FEATURES 安全特点



Precision machined double sided safety teeth design
独特双边安全锁齿设计




Safety descending stop & alarm
二次下降, 近地骤停
警报提示



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Height limit switch
高度限位开关



Abrasion resistant slip plates for 4 wheel alignment
四轮定位耐磨侧滑配置

TECHNICAL DATA 技术参数

MODEL 型号	PL-C35 / C45	PL-C55
Capacity 举升重量	3.5 Ton / 4.5 Ton	5.5 Ton
Lifting height 举升高度	1850mm(73 ")	1850mm(73 ")
Min height 平台高度	330mm(13")	380mm(15")
Platform length 平台长度	4000mm(127 1/2 ") / 4500mm(177 1/5 ")	5000mm(196 9/10 ")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-Y35/Y35D /Y40

Tubular Structure Wheel Alignment Scissor Lift With Built In Lifting Platforms

方通大剪字母双层四轮定位举升机



(CE: ONLY FOR PL-Y35/Y40)


PL-Y35



- Pneumatic Lock Release**
气动解锁
- Electromagnetic Lowering**
电磁下降
- For wheel alignment**
四轮定位
- Lengthened Platform**
主机平台加长

STANDARD

标准配置



Abrasion resistant slip plates for 4 wheel alignment
四轮定位耐磨侧滑配置



High-precision synchronized hydraulic cylinders with imported sealed rings
高精度同步液压油缸 优选进口密封圈



EVA Rubber mat (4pcs/set)
EVA胶垫 (4pcs/套)

OPTIONAL

可选配置



Position-adjustable turntable
(选配) 转角盘, 位置可调



Photoelectric leveling
(选配) 光电水平


SAFETY FEATURES 安全特点



Precision machined double sided safety teeth design
独特双边安全锁齿设计



Safety descending stop & alarm
二次下降, 近地骤停 警报提示



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Height limit switch (Jack)
子机上限位





Height limit switch (Main platform)
主平台高度限位开关

DIMENSION 尺寸参数

PL-Y35 / Y35D

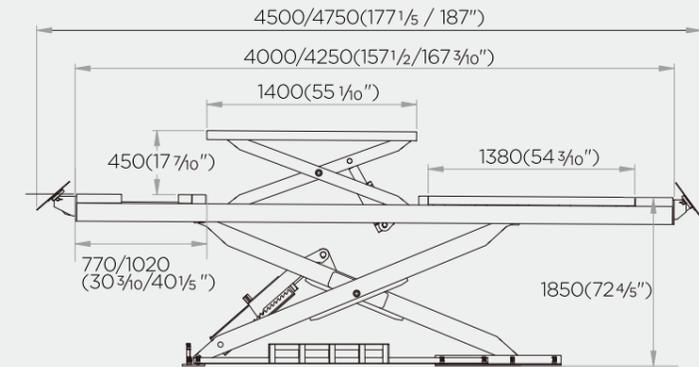

PL-Y40

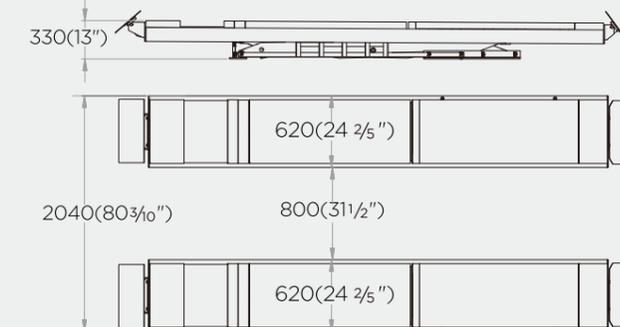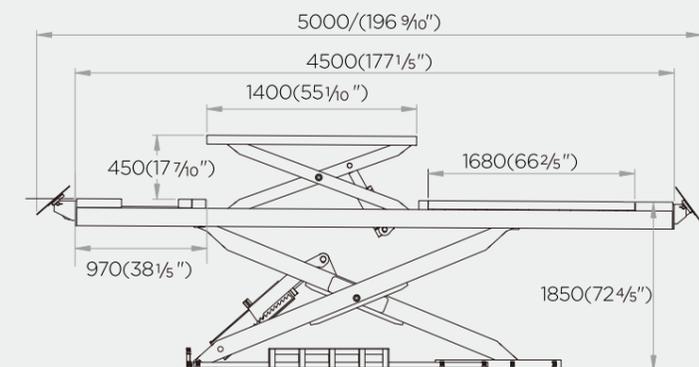

TECHNICAL DATA 技术参数

MODEL 型号	PL-Y35 / Y35D	PL-Y40
Capacity 举升重量	3.5 Ton	4.0 Ton
Lifting height 举升高度	1850mm(73 ")	1850mm(73 ")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	4000mm(127 1/2 ") / 4500mm(177 1/5 ")	4500mm(177 1/5 ")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-D35/D35C PL-D35D/D35H

Solid Steel Structure Wheel Alignment Scissor Lift Built In Lifting Platforms

大剪字母双层四轮定位举升机




(CE: ONLY FOR PL-D35/D35H)

PL-D35




Single sided extendable
平台单边延伸




Double sided extendable
子机平台可双边延伸



Position adjustable
SUV adaptors
专利可调节SUV装置



Lengthened
Platform
主机平台加长



Heightened
举升高度加高



Pneumatic Lock
Release
气动解锁



Electromagnetic
Lowering
电磁下降



For wheel
alignment
四轮定位

PL-D35C



PL-D35 + C

PL-D35D




PL-D35 + D

PL-D35H



PL-D35 + H

SAFETY FEATURES 安全特点



Safety valve for
anti-explosion of
hydraulic system
安全阀加强安全保护



Safety descending
stop & alarm
二次下降, 近地骤停
警报提示




Precision machined
double sided safety
teeth design
独特双边安全锁齿设计



Height limit switch
(Jack)
子机上限位




Height limit switch
(Main platform)
主平台高度限位开关




Abrasion resistant
slip plates for 4
wheel alignment
四轮定位耐磨侧滑配置

DIMENSION 尺寸参数

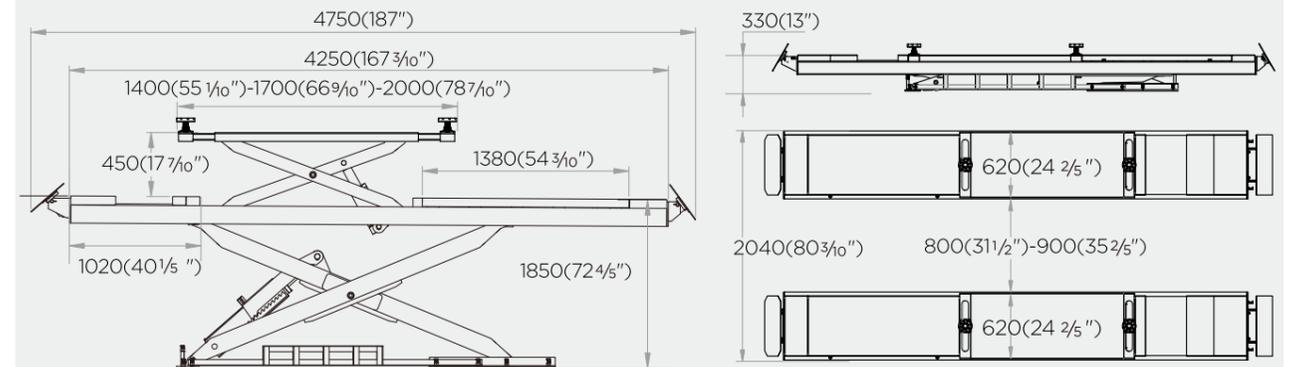

PL-D35C

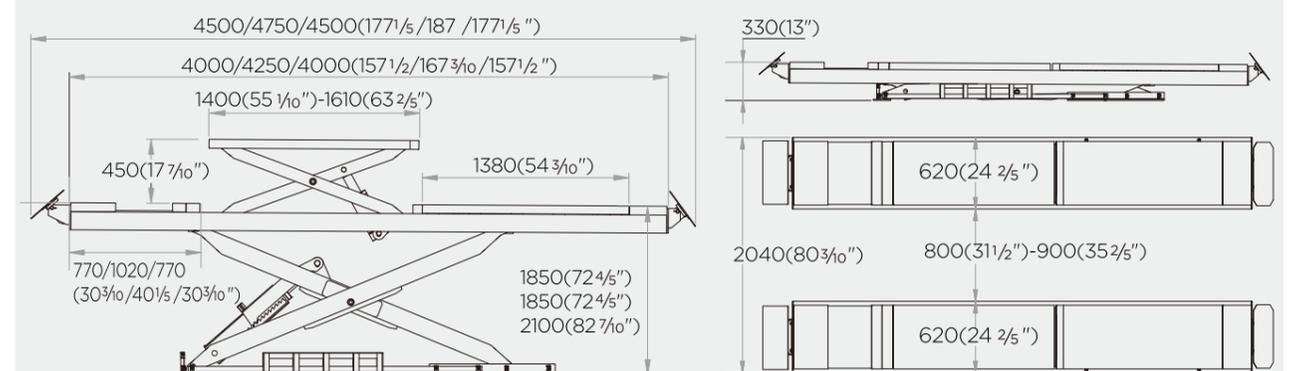

PL-D35/PL-D35D/PL-D35H

TECHNICAL DATA 技术参数

MODEL 型号	PL-D35C	PL-D35 / D35D/D35H
Capacity 举升重量	3.5 Ton	3.5 Ton
Lifting height 举升高度	1850mm(73 ")	1850/1850/2100mm(72 4/5 / 72 4/5 / 82 7/10")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	4250mm(167 3/10")	4000/4250/4000mm(157 1/2 / 167 3/10 / 157 1/2 ")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-D45/D45C /D45H


Solid Steel Structure Wheel Alignment Scissor Lift Built In Lifting Platforms

大剪字母双层四轮定位举升机




(CE: ONLY FOR PL-D45/D45H)

PL-D45

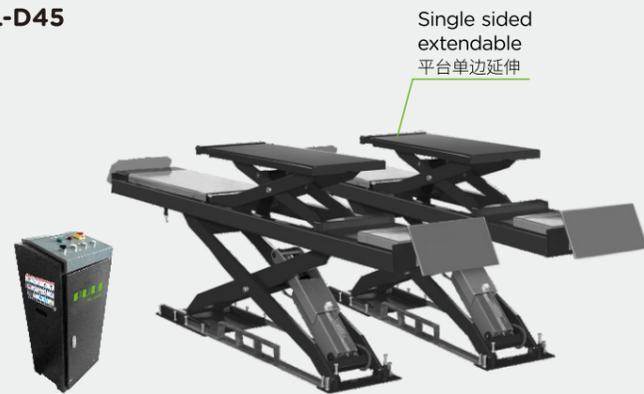

Single sided extendable
平台单边延伸



Double sided extendable
平台可双边延伸



Position adjustable SUV adaptors
专利可调节SUV装置



Heightened
举升高度加高



Pneumatic Lock Release
气动解锁



Electromagnetic Lowering
电磁下降



For wheel alignment
四轮定位

PL-D45C



PL-D45 + C

PL-D45H



PL-D45 + H

OPTIONAL 可选配置




Position-adjustable turntable
(选配) 转角盘,位置可调



Photoelectric leveling
(选配) 光电水平

SAFETY FEATURES 安全特点



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Safety descending stop & alarm
二次下降, 近地骤停
警报提示




Precision machined double sided safety teeth design
独特双边安全锁齿设计



Height limit switch (Jack)
子机上限位




Height limit switch (Main platform)
主平台高度限位开关




Abrasion resistant slip plates for 4 wheel alignment
四轮定位耐磨侧滑配置

DIMENSION 尺寸参数

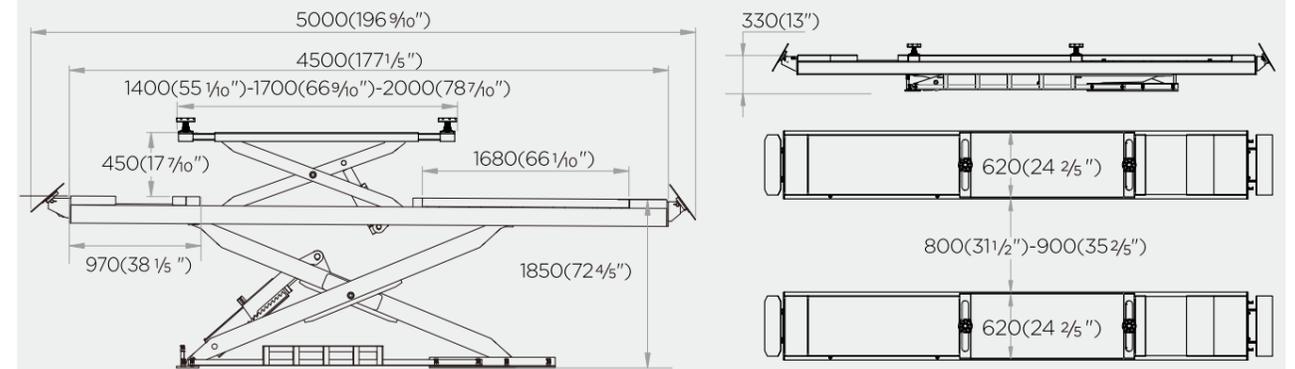

PL-D45C

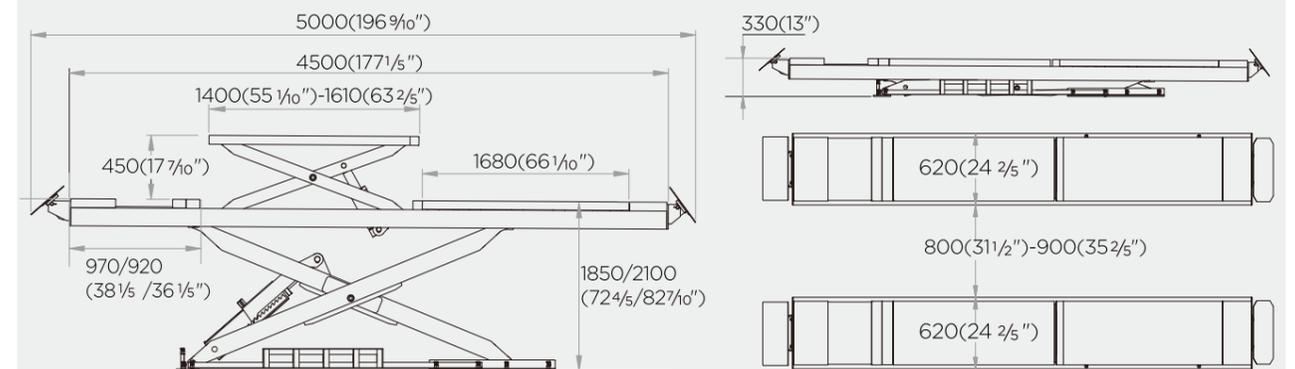

PL-D45/PL-D45H

TECHNICAL DATA 技术参数

MODEL 型号	PL-D45C	PL-D45 /D45H
Capacity 举升重量	4.5 Ton	4.5 Ton
Lifting height 举升高度	1850mm(73")	1850/2100mm(72 4/8"/82 7/16")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	4500mm(177 1/8")	4500mm(177 1/8")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-D55/D55H


Solid Steel Structure Wheel Alignment Scissor Lift Built In Lifting Platforms

大剪字母双层四轮定位举升机




(CE: ONLY FOR PL-D55/D55H)

PL-D55

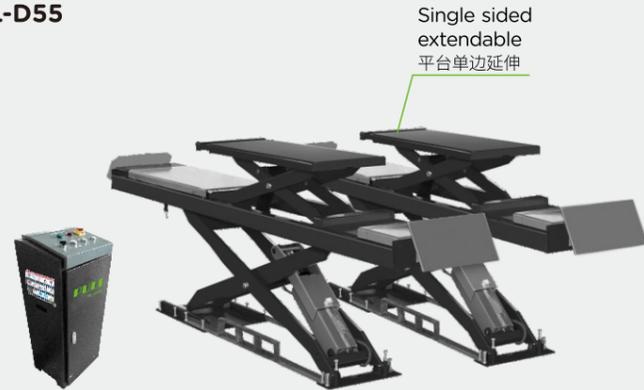

Single sided extendable
平台单边延伸



Heightened
举升高度加高

PL-D55H



PL-D55 + H



Pneumatic Lock Release
气动解锁




Electromagnetic Lowering
电磁下降



For wheel alignment
四轮定位

STANDARD 标准配置



Abrasion resistant slip plates for 4 wheel alignment
四轮定位耐磨侧滑配置



EVA Rubber mat (4pcs/set)
EVA胶垫 (4pcs/套)

OPTIONAL 可选配置



Position-adjustable turntable
(选配) 转角盘, 位置可调



Photoelectric leveling
(选配) 光电水平

SAFETY FEATURES 安全特点



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Safety descending stop & alarm
二次下降, 近地骤停
警报提示



Precision machined double sided safety teeth design
独特双边安全锁齿设计




Height limit switch (Jack)
子机上限位




Height limit switch (Main platform)
主平台高度限位开关

DIMENSION 尺寸参数

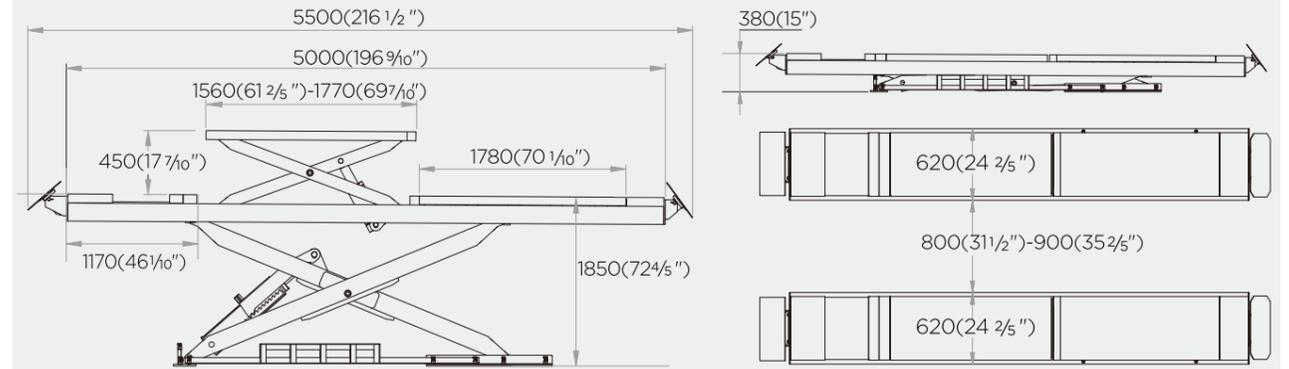

PL-D55

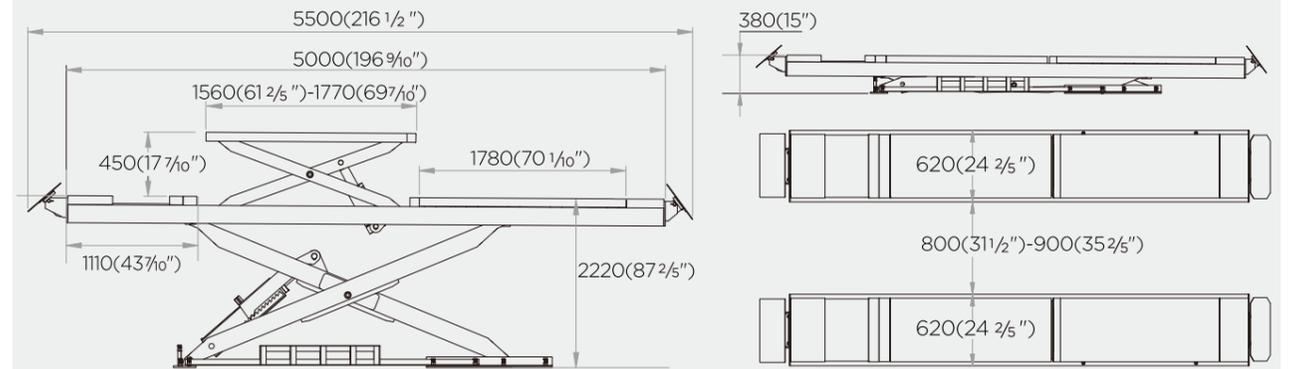

PL-D55H

TECHNICAL DATA 技术参数

MODEL 型号	PL-D55	PL-D55H
Capacity 举升重量	5.5 Ton	5.5 Ton
Lifting height 举升高度	1850mm(73 ")	2220mm(87 2/5 ")
Min height 平台高度	380mm(15")	380mm(15")
Platform length 平台长度	5000mm(196 9/10")	5000mm(196 9/10")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-D35B /D40B



Low Profile On Ground Wheel Alignment Scissor Lift

超薄大剪平板四轮定位举升机



Built inner guide rails for rolling jack
预留二次小车内导轨

- No ditch needed**
免挖坑
- Pneumatic Lock Release**
气动解锁
- Electromagnetic Lowering**
电磁下降
- For wheel alignment**
四轮定位

Rolling jack (OPTIONAL)

二次小车 (可选配置) 2T

Convenient for clients' self-installation
方便客户自行安装



Manual Control
手动小车



Pneumatic Control
气动小车



Electric Control
电动小车

D35 D40B --PL-X20TD/X20TS/X20TQ
D35 D40B 推荐PL-X20TD/X20TS/X20TQ

OPTIONAL

可选配置



Position-adjustable turntable
(选配) 转角盘,位置可调



Photoelectric leveling
(选配) 光电水平

SAFETY FEATURES 安全特点




Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Safety descending stop & alarm
二次下降, 近地骤停
警报提示




Extra double auxiliary oil cylinders
双助力辅助油缸



Precision machined double sided safety teeth design
独特双边安全锁齿设计




Height limit switch
高度限位开关



Abrasion resistant slip plates for 4 wheel alignment
四轮定位耐磨侧滑配置

DIMENSION 尺寸参数

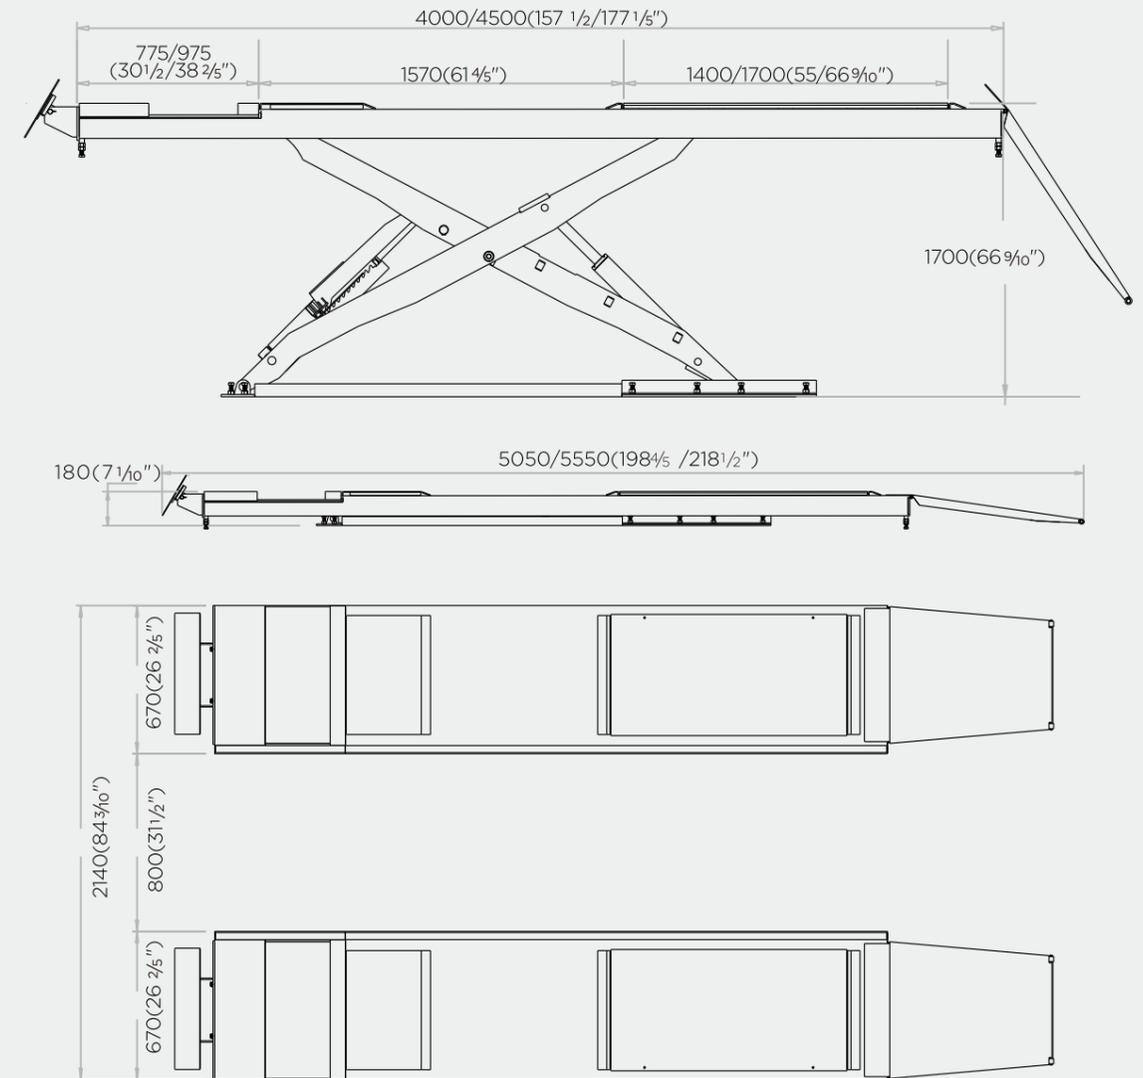

TECHNICAL DATA 技术参数

MODEL 型号	PL-D35B	PL-D40B
Capacity 举升重量	3.5 Ton	4 Ton
Lifting height 举升高度	1700mm(66 9/10")	1700mm(66 9/10")
Min height 平台高度	180mm(7")	180mm(7")
Platform length 平台长度	4000mm(127 1/2")	4500mm(177 1/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-H25/H45

Pantograph Lift

平行小剪




PL-H25 2.5 T



PL-H45 4.5 T



SAFETY FEATURES 安全特点



Parallel structure design
平行结构设计
使机身稳定耐用




Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护

OPTIONAL 可选配置



Drive-by-wire button
(选配) 线控按钮

DIMENSION 尺寸参数

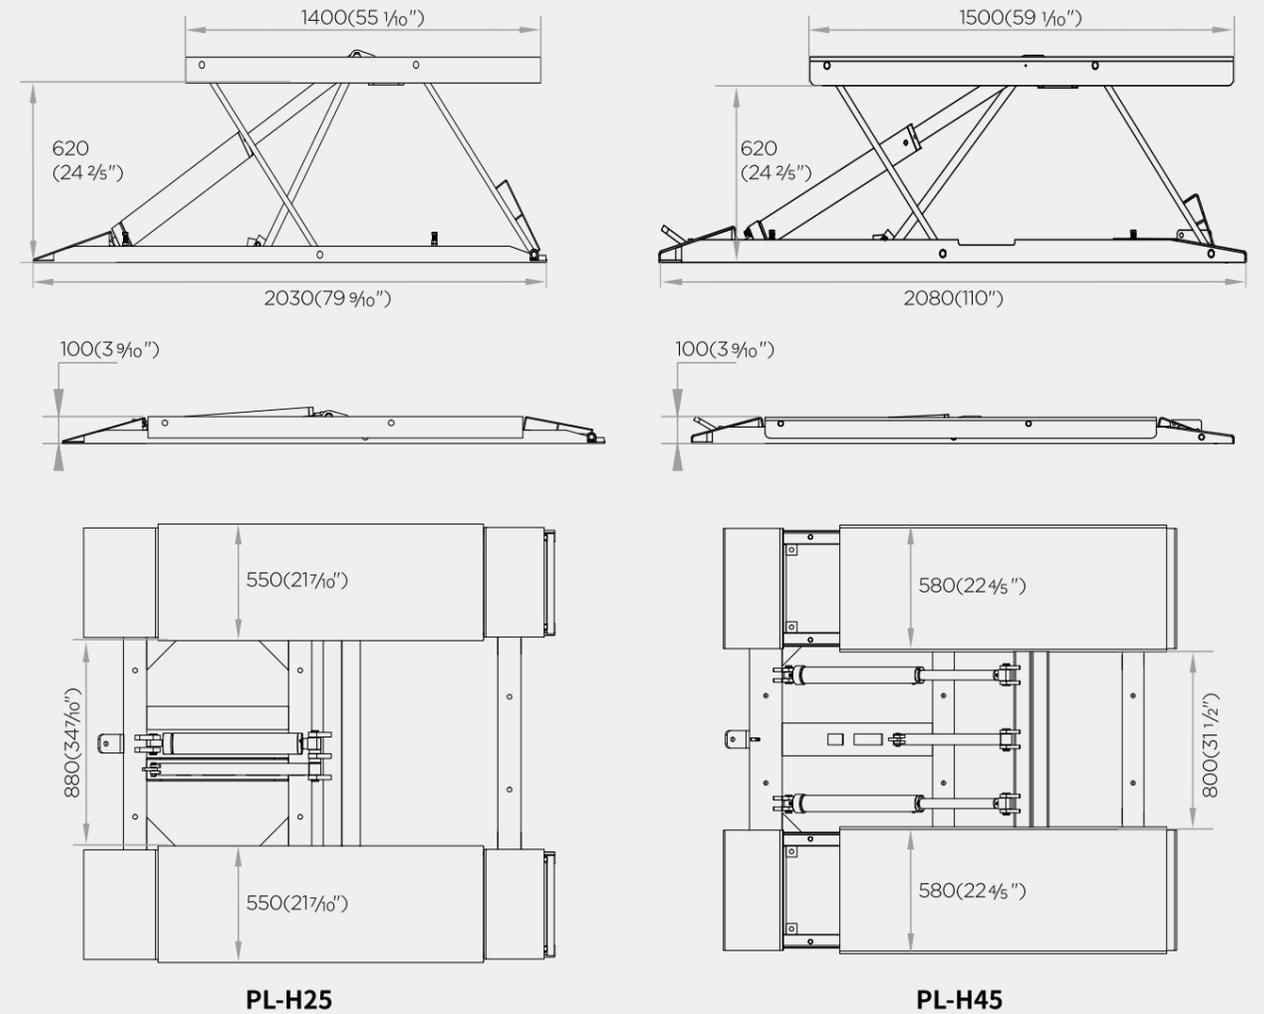



TECHNICAL DATA 技术参数

MODEL 型号	PL-H25	PL-H45
Capacity 举升重量	2.5 Ton	4.5 Ton
Lifting height 举升高度	620mm(24 2/5")	620mm(24 2/5")
Min height 平台高度	100mm(4")	100mm(4")
Platform length 平台长度	1400mm(55 1/10")	1500mm(59 1/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-H30M/H45M

Mobile Small Platform Pantograph Lift

移动平行小剪

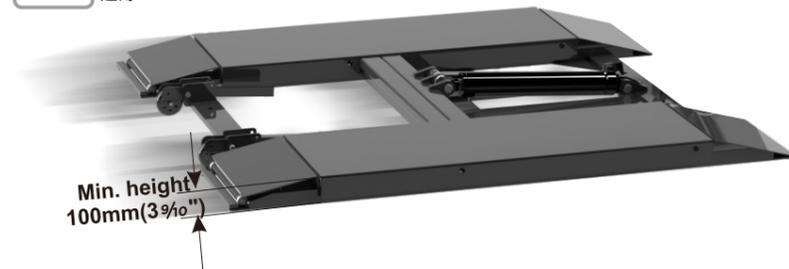

SAFETY FEATURES 安全特点



Parallel structure design
平行结构设计
使机身稳定耐用



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护

OPTIONAL 可选配置




Drive-by-wire button
(选配) 线控按钮



Mobile control box
(选配) 移动电控箱

DIMENSION 尺寸参数

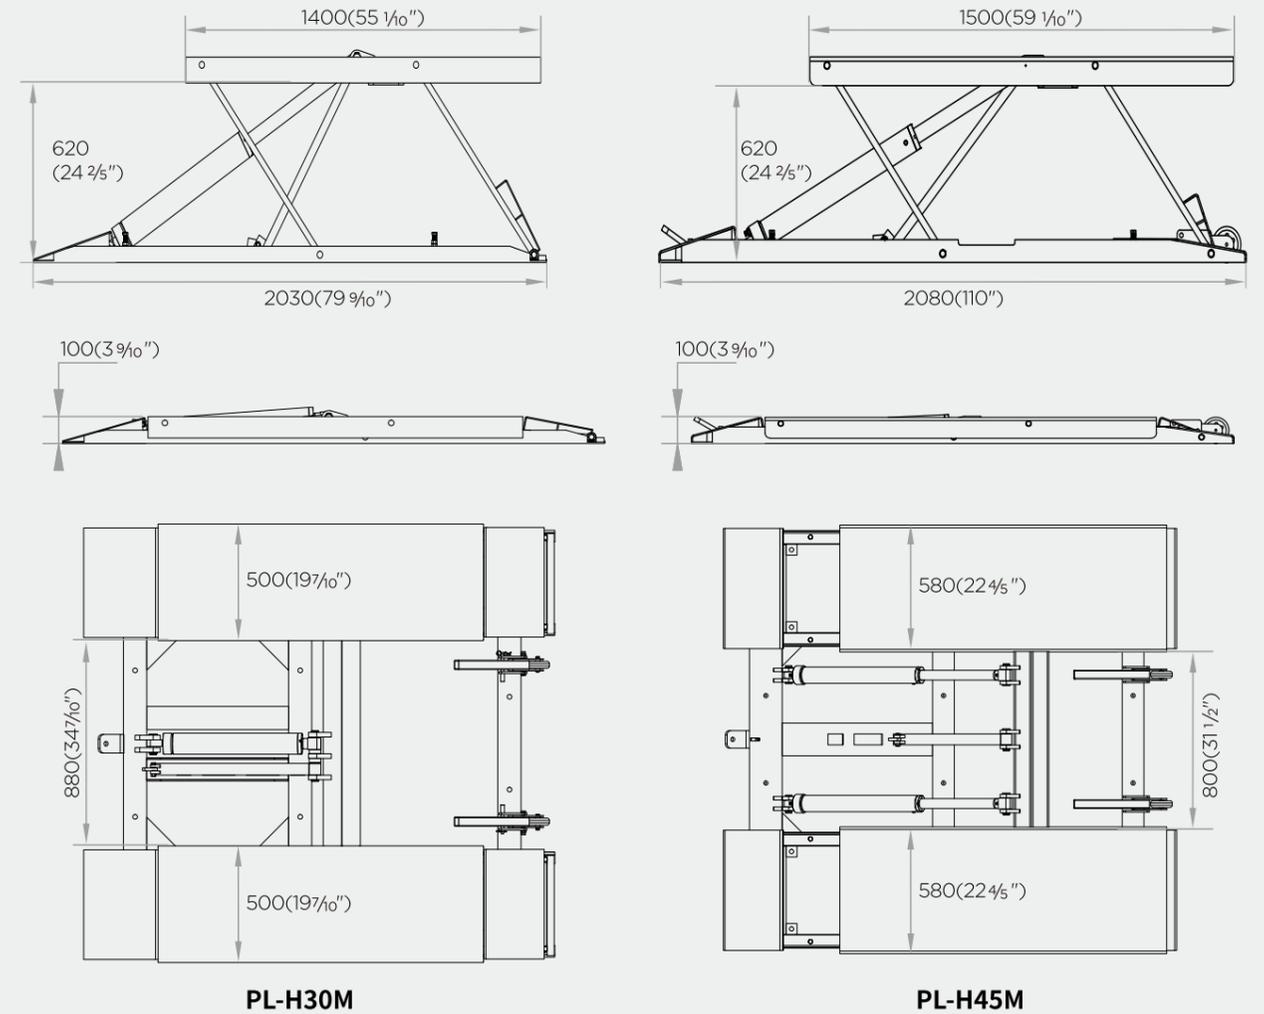

TECHNICAL DATA 技术参数

MODEL 型号	PL-H30M	PL-H45M
Capacity 举升重量	3.0 Ton	4.5 Ton
Lifting height 举升高度	620mm(24 2/5")	620mm(24 2/5")
Min height 平台高度	100mm(4")	100mm(4")
Platform length 平台长度	1400mm(55 1/16")	1500mm(59 1/16")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-Z25M/Z30M

Mobile Mid-rise Scissor Lift

移动连体中位小剪剪式升降机



- No ditch needed**
免挖坑
- Electrical Lock Release**
电动解锁
- Electromagnetic Lowering**
电磁下降



* In service state




* Moving state

SAFETY FEATURES 安全特点



Electrical locks engaged automatically when lowering
下降时自动开启电磁安全锁



Synchronized hydraulic cylinders system
同步2缸系统



Safety descending stop & alarm
二次下降，近地骤停警报提示



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Height limit switch
高度限位开关



Rubber pads
橡胶垫

DIMENSION 尺寸参数

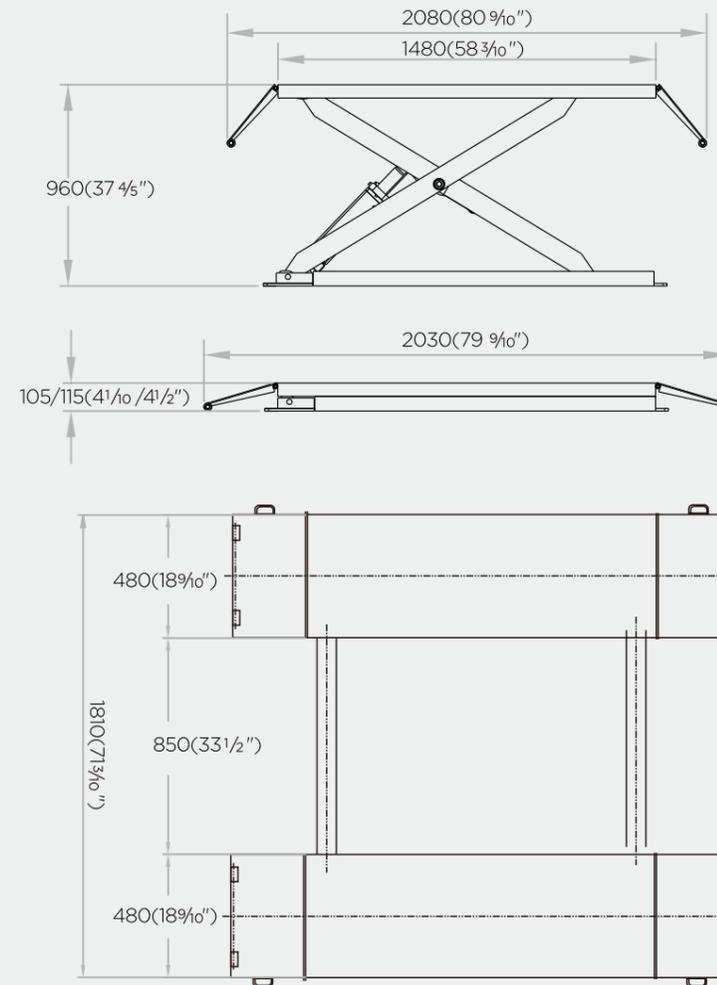

TECHNICAL DATA 技术参数

MODEL 型号	PL-Z25M	PL-Z30M
Capacity 举升重量	2.5 Ton	3.0 Ton
Lifting height 举升高度	960mm(37 4/5")	960mm(37 4/5")
Min height 平台高度	105mm(4 1/16")	115mm(4 1/2")
Platform length 平台长度	2080mm(81 4/5")	2080mm(80 4/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-Z30/Z30Y

Mid-rise Scissor Lift

中位小剪剪式升降机




PL-Z30



- No ditch needed**
免挖坑
- Pneumatic Lock Release**
气动解锁
- Electromagnetic Lowering**
电磁下降

PL-Z30+A = PL-Z30Y



Allows to fix the ramp as an extendable platform, suits for long wheel base vehicles
上车板可固定用作平台延伸板, 适合长底盘车型



X 4 pcs
160*120*35mm
Rubber pads
橡胶垫

OPTIONAL 可选配置



Drive-by-wire button
(选配) 线控按钮



Photoelectric leveling
(选配) 光电水平

SAFETY FEATURES 安全特点



Precision machined safety lock
安全锁设计保证操作安全



Synchronized hydraulic cylinders system
同步4缸系统



Safety descending stop & alarm
二次下降, 近地骤停
警报提示




Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Height limit switch
高度限位开关

DIMENSION 尺寸参数

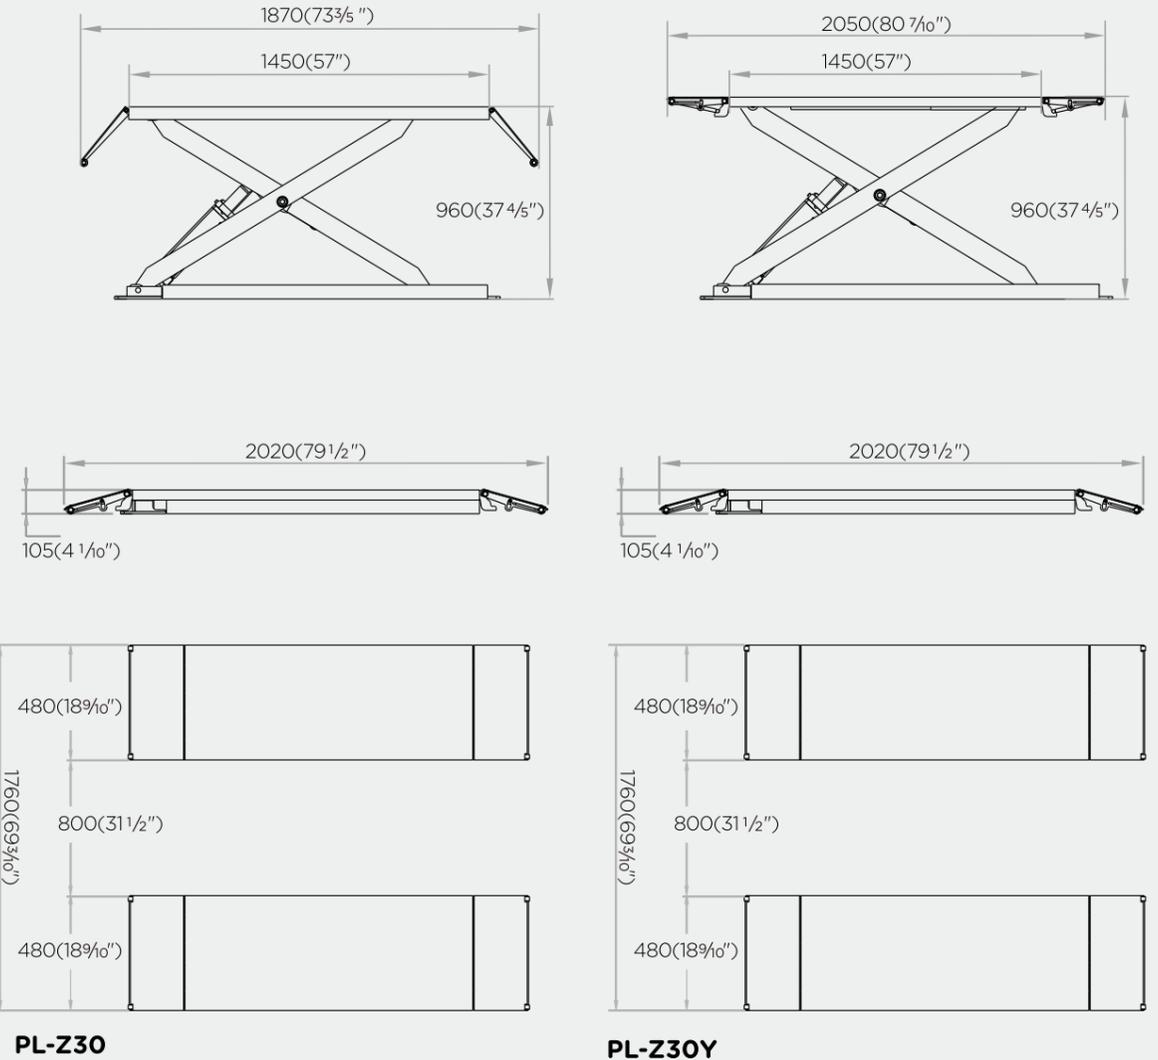

TECHNICAL DATA 技术参数

MODEL 型号	PL-Z30/Z30Y
Capacity 举升重量	3.0 Ton
Lifting height 举升高度	960mm(37 4/5")
Min height 平台高度	105mm(4 1/16")
Platform length 平台长度	2020mm(79 1/2")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-B30/B30Y

Ultra-Thin Wheel Free Scissor Lift

超薄小型剪式举升机




No ditch needed
免挖坑

Pneumatic Lock Release
气动解锁

Electromagnetic Lowering
电磁下降

PL-B30+A = PL-B30Y



Allows to fix the ramp as an extendable platform, suits for long wheel base vehicles
上车板可固定用作平台延伸板, 适合长底盘车型

OPTIONAL
可选配置



Drive-by-wire button
(选配) 线控按钮



Photoelectric leveling
(选配) 光电水平

SAFETY FEATURES 安全特点



Precision machined safety lock
安全锁设计保证操作安全



Synchronized hydraulic cylinders system
同步4缸系统



Safety descending stop & alarm
二次下降, 近地骤停
警报提示



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Height limit switch
高度限位开关



Rubber pads
橡胶垫
X 4pcs
160*120*35mm

DIMENSION 尺寸参数

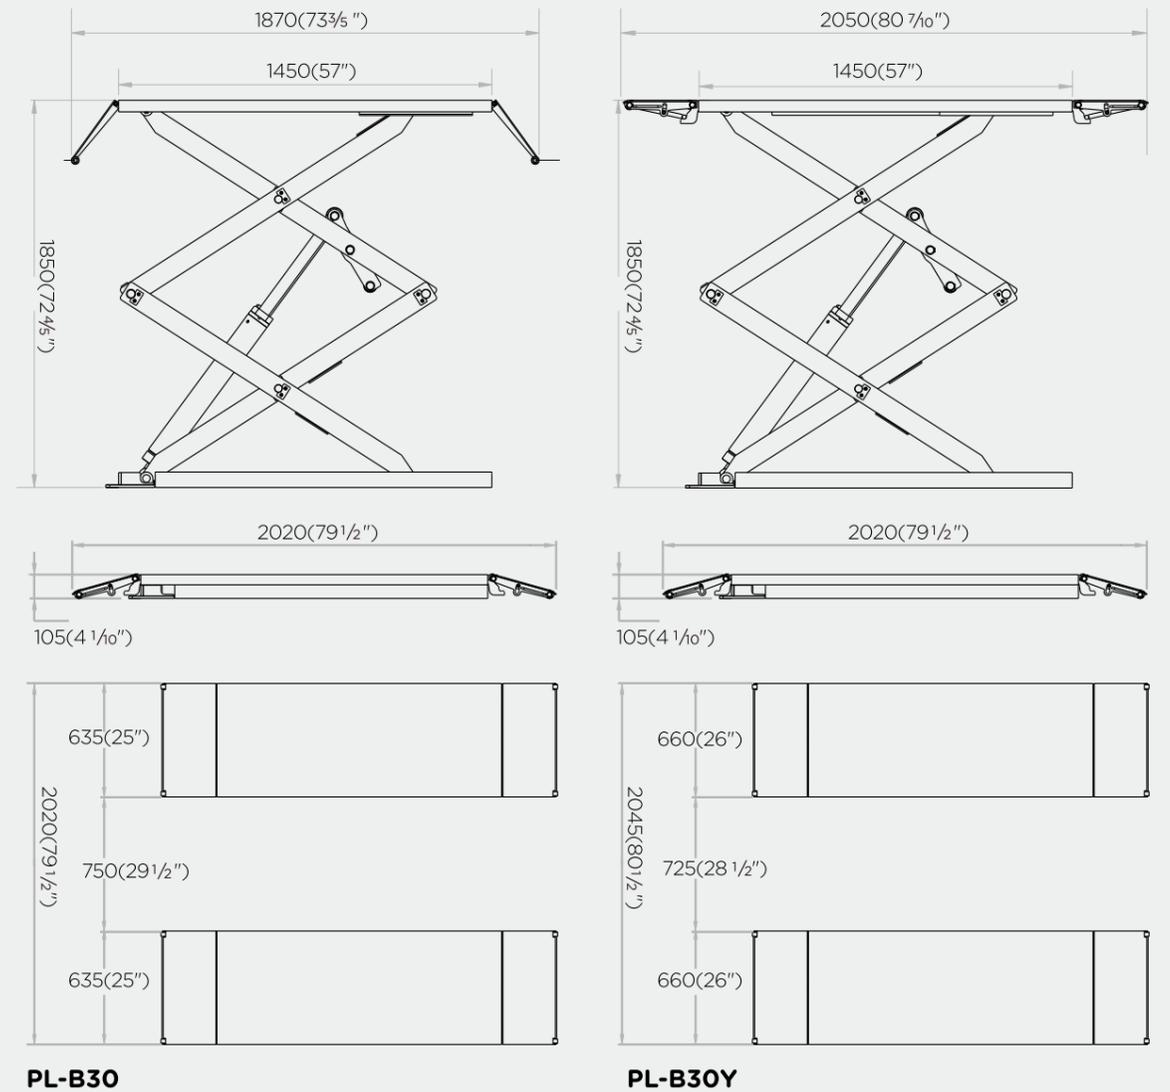

TECHNICAL DATA 技术参数

MODEL 型号	PL-B30/B30Y
Capacity 举升重量	3.0 Ton
Lifting height 举升高度	1850mm(72 9/10")
Min height 平台高度	105mm(4 1/10")
Platform length 平台长度	2020mm(79 1/2")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-E30/E30L/E30C

Full Rise Scissor Lift

藏地小剪式汽车举升机



(CE: ONLY FOR U-E30/E30L)

PL-E30

Single sided extendable
平台单边延伸

L

Double sided extendable
平台可双边延伸

C

Double sided extendable
平台可双边延伸

PATENTED

Position adjustable SUV adaptors
专利可调节SUV装置

Pneumatic Lock Release
气动解锁

Electromagnetic Lowering
电磁下降

PL-E30L

PL-E30 + L

PL-E30C

PL-E30 + C

OPTIONAL 可选配置

Drive-by-wire button
(选配) 线控按钮

Photoelectric leveling
(选配) 光电水平

SAFETY FEATURES 安全特点



Precision machined safety lock
安全锁设计保证操作安全



Safety descending stop & alarm
二次下降, 近地骤停
警报提示



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Height limit switch
上限位开关



EVA Rubber mat
(4pcs/set)
EVA胶垫 (4pcs/套)

DIMENSION 尺寸参数

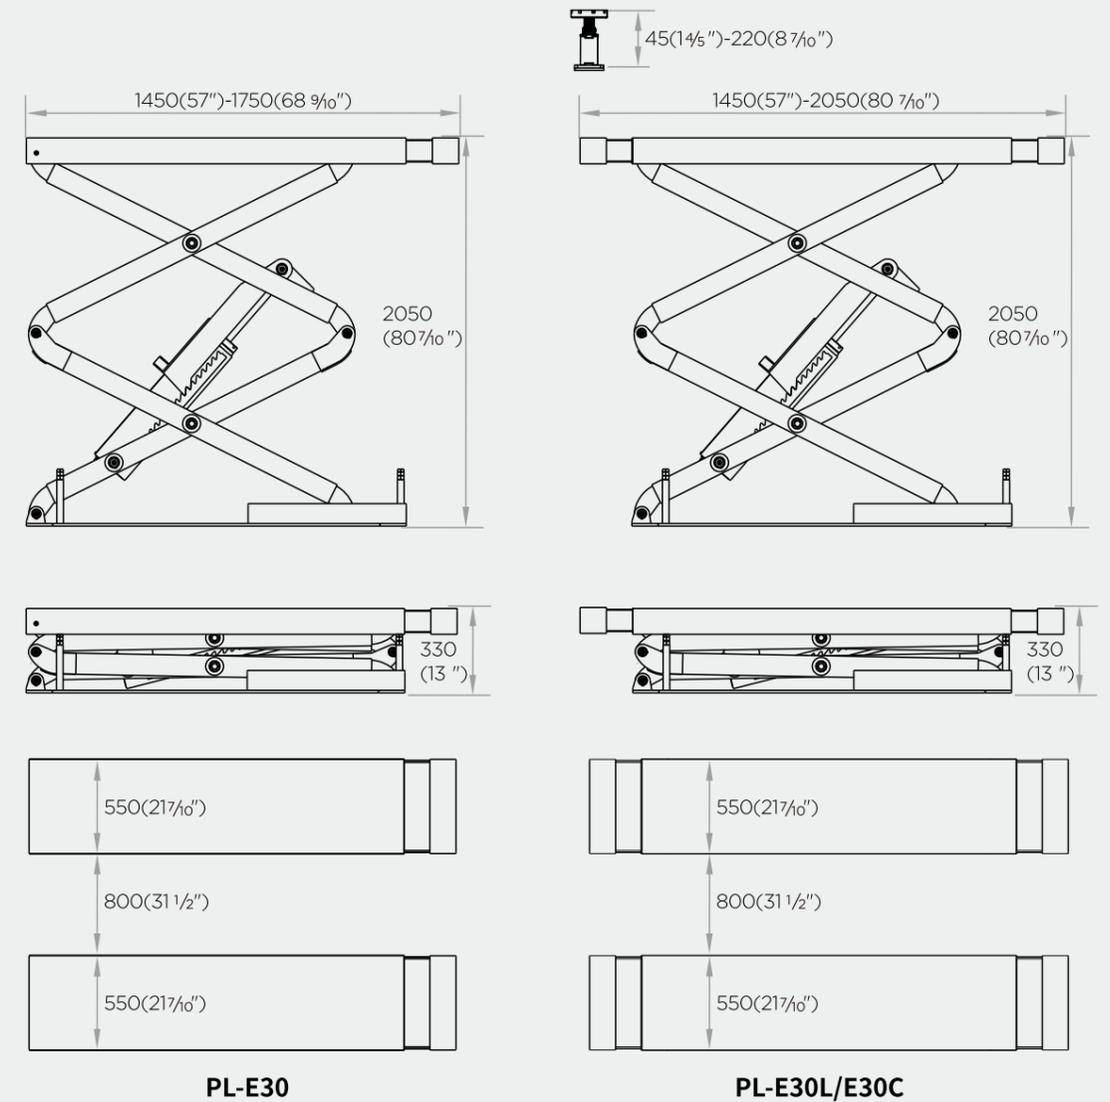

TECHNICAL DATA 技术参数

MODEL 型号	PL-E30	PL-E30L/E30C
Capacity 举升重量	3.0 Ton	3.0 Ton
Lifting height 举升高度	2050mm(80")	2050mm(80")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	1450mm(57")--1750mm(68 9/16")	1450mm(57")--2050mm(80 7/16")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-E35/E35L/E35C

Full Rise Scissor Lift

藏地小剪式汽车举升机



PL-E35

Single sided extendable
平台单边延伸

L

Double sided extendable
平台可双边延伸

C

Double sided extendable
平台可双边延伸

PATENTED

Position adjustable SUV adaptors
专利可调节SUV装置

Pneumatic Lock Release
气动解锁

Electromagnetic Lowering
电磁下降

PL-E35L

PL-E35 + L

PL-E35C

PL-E35 + C

OPTIONAL
可选配置

Drive-by-wire button
(选配) 线控按钮

Photoelectric leveling
(选配) 光电水平

SAFETY FEATURES 安全特点



Precision machined safety lock
安全锁设计保证操作安全



Safety descending stop & alarm
二次下降, 近地骤停
警报提示



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Height limit switch
上限位开关



EVA Rubber mat (4pcs/set)
EVA胶垫 (4pcs/套)

DIMENSION 尺寸参数

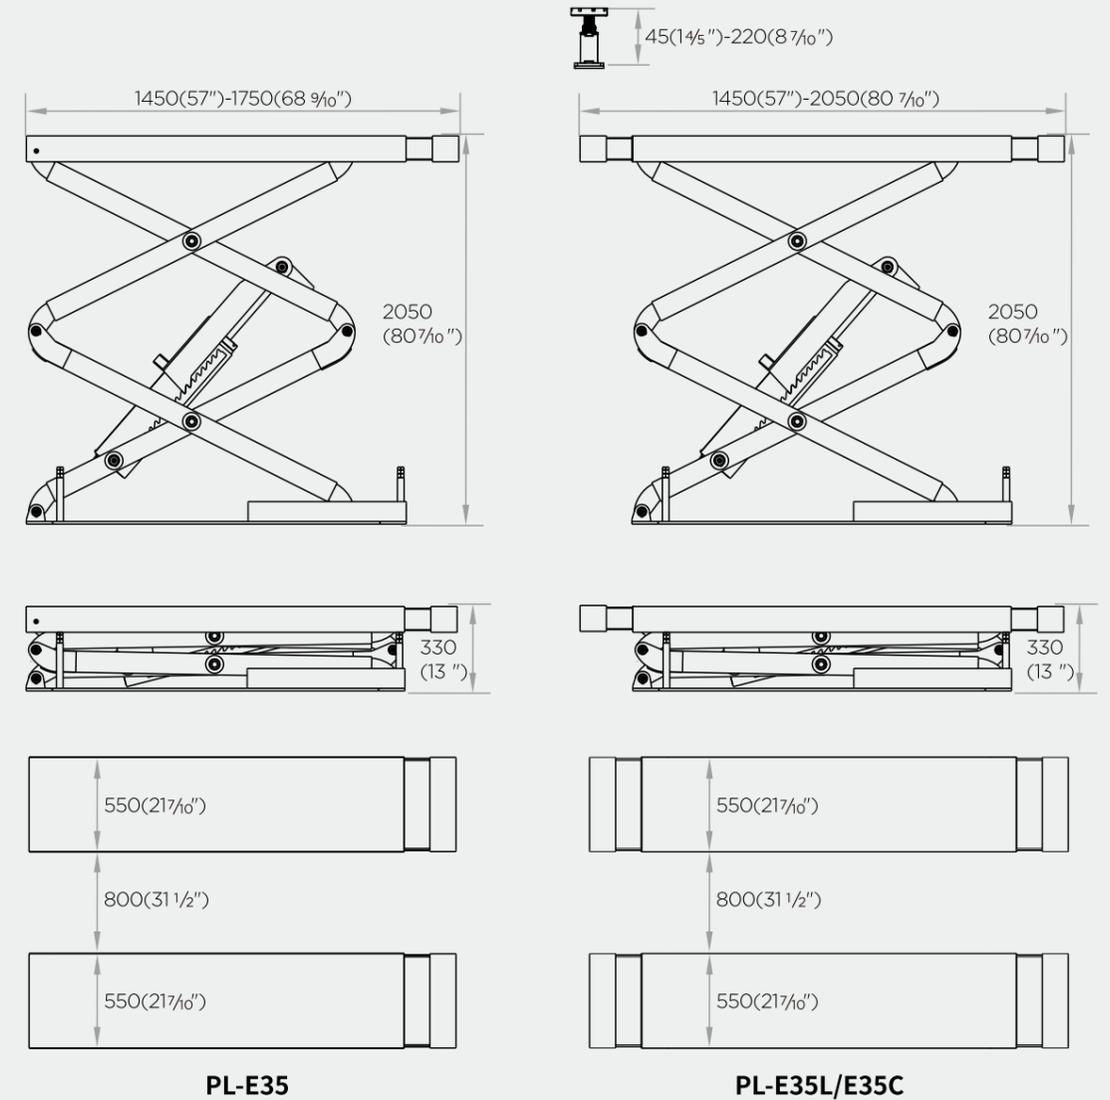

TECHNICAL DATA 技术参数

MODEL 型号	PL-E35	PL-E35L/E35C
Capacity 举升重量	3.5 Ton	3.5 Ton
Lifting height 举升高度	2050mm(80")	2050mm(80")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	1450mm(57")--1750mm(68 9/16")	1450mm(57")--2050mm(80 7/16")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-DP5

Ev Battery Lift

新能源动力车电池举升机



No ditch needed

免挖坑



Automatic Release

自动解锁



Manual lowering

手动下降

SAFETY FEATURES 安全特点



Parallel structure design
平行结构设计
使机身稳定耐用



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护

OPTIONAL 可选配置



Drive-by-wire button
(选配) 线控按钮

Easily transfer **Without Installation**
移动便捷 无需安装

Elevates from **1100 -1800mm**
举升范围: 1100-1800mm





Pneumatic / Electric model available
有气动及电动两款型号可供选择

Angle adjustable table is built to meet with the battery bottom seamless.
平台可调节角度，与电池底部无缝衔接。

Convenient to position the table and carry the battery to the right position, then adjust to fix it horizontally within 30mm without moving the lift.
可轻松运送电池到指定位置并将其固定；平台可以在水平方向各移动30mm，在不需要移动举升机的情况下就可以完成电池的安装。

The lift table also features high quality components assembly for **Fast & Precise** lifting.
本举升机采用高品质零件组装，确保举升操作快捷、精确。

DIMENSION 尺寸参数

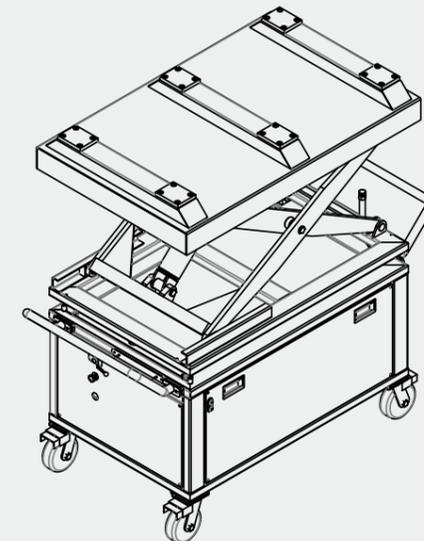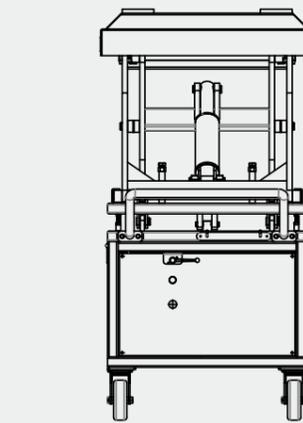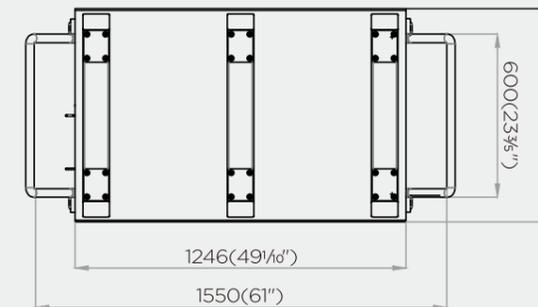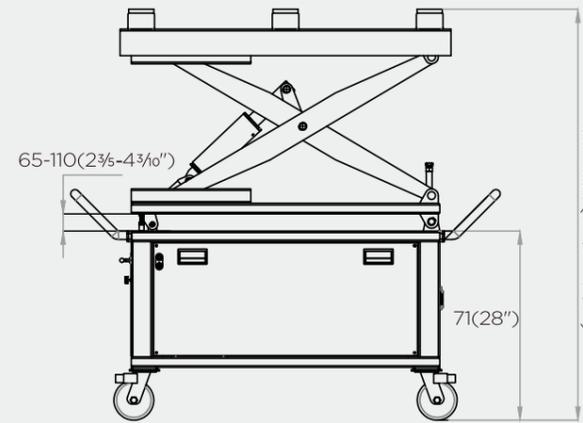


TECHNICAL DATA 技术参数

MODEL 型号	PL-DP5
Capacity 举升重量	1.0 Ton
Lifting height 举升高度	1800mm(70 ⁹ / ₁₆ ")
Min height 平台高度	1100mm(43 ³ / ₁₆ ")
Platform length 平台长度	1246mm (49 ¹ / ₁₆ ")
Platform Width 平台宽度	800mm (31 ¹ / ₂ ")
Power supply 电源功率	220V 1PH 50 2.2KW

PL-H25A


Portable Vehicle Lift

便携式移动汽车举升机

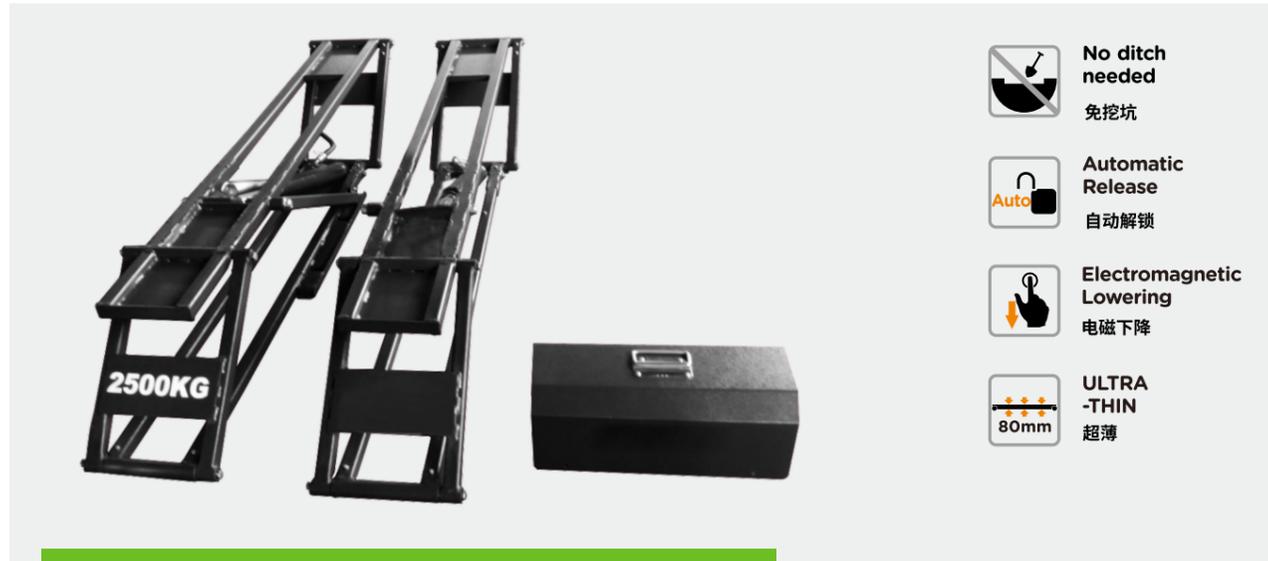

- No ditch needed**
免挖坑
- Automatic Release**
自动解锁
- Electromagnetic Lowering**
电磁下降
- ULTRA-THIN**
超薄
80mm

DIMENSION 尺寸参数

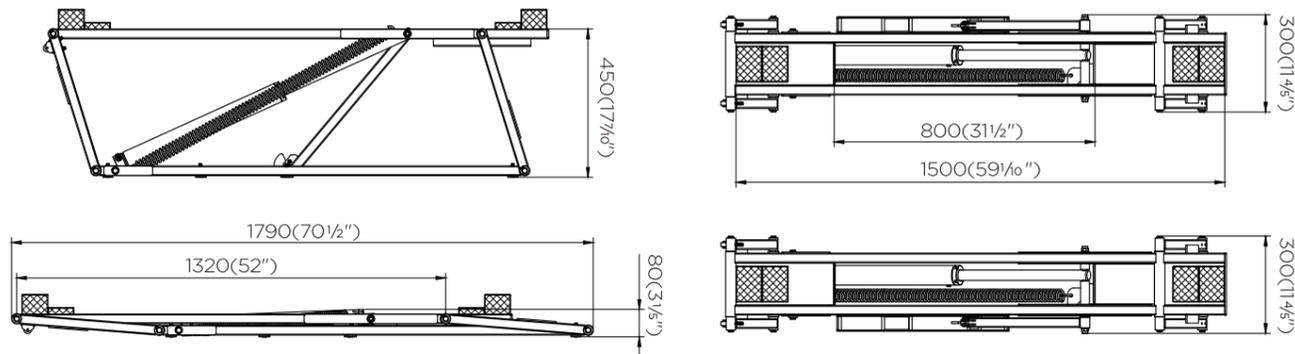

TECHNICAL DATA 技术参数


MODEL 型号	PL-H25A
Capacity 举升重量	2.5Ton
Lifting height 举升高度	450mm(17 ⁷ / ₁₆ ")
Min height 平台高度	80mm(3 ¹ / ₈ ")
Platform length 平台长度	1500mm (59 ¹ / ₁₆ ")
Platform Width 平台宽度	195mm (7 ⁷ / ₁₆ ")
Power supply 电源功率	12DC 0.8KW

ROLLING JACK (OPTIONAL)

二次小车 (可选配置)



DIMENSION 尺寸参数

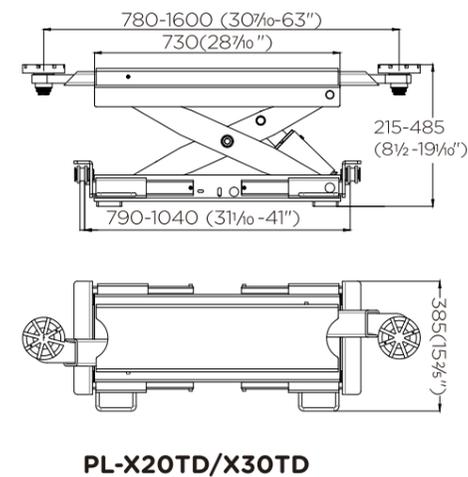

TECHNICAL DATA 技术参数

MODEL 型号	PL-X20TD/X20TS/X20TQ	PL-X30TD/X30TS/X30TQ
Capacity 举升重量	2.0 Ton	3.0 Ton
Lifting height 举升高度	485mm(19 ¹ / ₁₆ ")	485mm(19 ¹ / ₁₆ ")
Min height 平台高度	215mm(8 ¹ / ₂ ")	215mm(8 ¹ / ₂ ")
Platform length 平台长度	730mm(28 ⁷ / ₁₆ ")	730mm(28 ⁷ / ₁₆ ")
Telescopic arm stroke 伸缩臂行程	780-1600mm(30 ⁷ / ₁₆ -63")	780-1600mm(30 ⁷ / ₁₆ -63")

FEATURES 特点



1. Telescopic arm stroke length: Max.1600mm
伸缩臂行程长度: 最大1600mm,能满足不同轴距、不同支点车辆使用。
2. Adjustable lifting tray height: 30-65mm
可调节升降托盘高度: 30-65mm,高、低底盘车辆通用。
3. Suitable for four post or scissor lifts
可以与四柱举升机、平板剪式举升机配套使用
4. Hydraulic and mechanical safety claw locks involved
配有液压锁和机械安全爪锁
5. Standard equipped with a handle, easy to slide the jack along the guide rail
配有把手,方便小车在导轨内来回移动

PL-M01/M02/M04

Motorcycle Lift

摩托车举升机



PL-M01

0.3 |



Standard Pneumatic Wheel Clamp (small)
标配气动轮夹 (小)

PL-M02/M04

0.5
0.75 |



Standard Pneumatic Wheel Clamp (big)
标配气动轮夹 (大)



Pneumatic Lock Release
气动解锁



Electromagnetic Lowering
电磁下降

SAFETY FEATURES 安全特点



Height limit switch
高度限位开关



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护

STANDARD 标准配置



Foot-switch for the pneumatic wheel clamp
气动轮夹脚踏



Magnet controller, convenient for storing
控制盒带磁铁, 便于收纳



Ramp Assembly
翻转式上车板



Control box
控制盒子



OPTIONAL 可选配置





Optional(big) Automatic Wheel Clamp
选配 (大) 自动轮夹

DIMENSION 尺寸参数

PL-M01

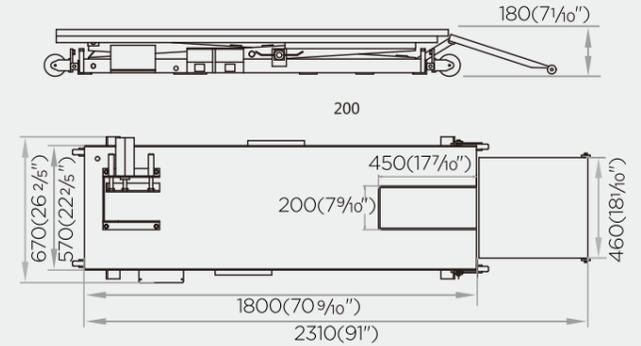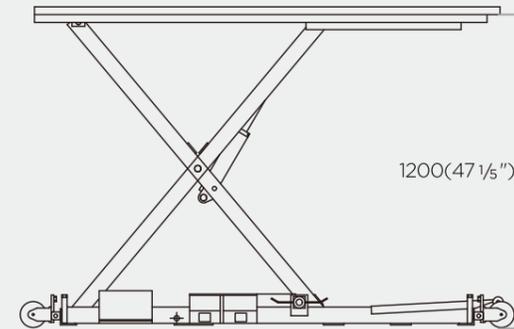

PL-M02/M04

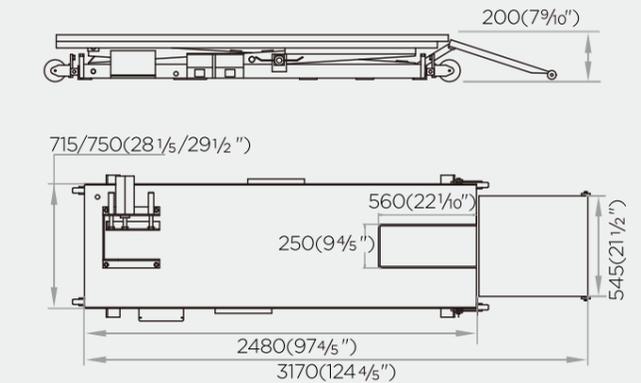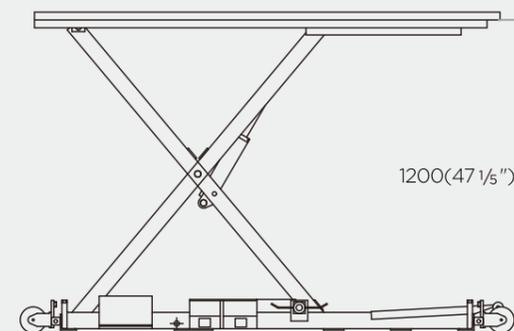

TECHNICAL DATA 技术参数

MODEL 型号	PL-M01	PL-M02/M04
Capacity 举升重量	0.3 Ton	0.5 / 0.75 Ton
Lifting height 举升高度	1200mm(47 1/5'')	1300mm(51'')
Min height 平台高度	180mm(7 1/10'')	200mm(7 9/10'')
Platform length 平台长度	1800mm(70 9/10'')	2480mm(97 4/5'')
Power supply 电源功率	110V/220V/230V/240V 1ph 0.75kw	110V/220V/230V/240V 1ph 0.75 kw

PL-M03/M09

Electric Motorcycle Lift

电动摩托车举升机



Manual Lock Release
手动解锁

Electromagnetic Lowering
电磁下降

SAFETY FEATURES 安全特点



Height limit switch
高度限位开关



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护



Safety lock
安全锁

STANDARD 标准配置



Extension loading ramp, easy loading & no touching the exhaust pipe
加长上车板,便于上车,不会碰到排气管



Magnet controller, convenient for storing
控制盒带磁铁,便于收纳



Drawer-type platform
拖放式上车板




Tools groove for storing small parts, time saving and convenient
工具槽,方便维修机器时放小螺丝小零件




Standard(big) Automatic Wheel Clamp
标配(大)自动轮夹

OPTIONAL 可选配置



Side panel with loading board
扩展台

DIMENSION 尺寸参数

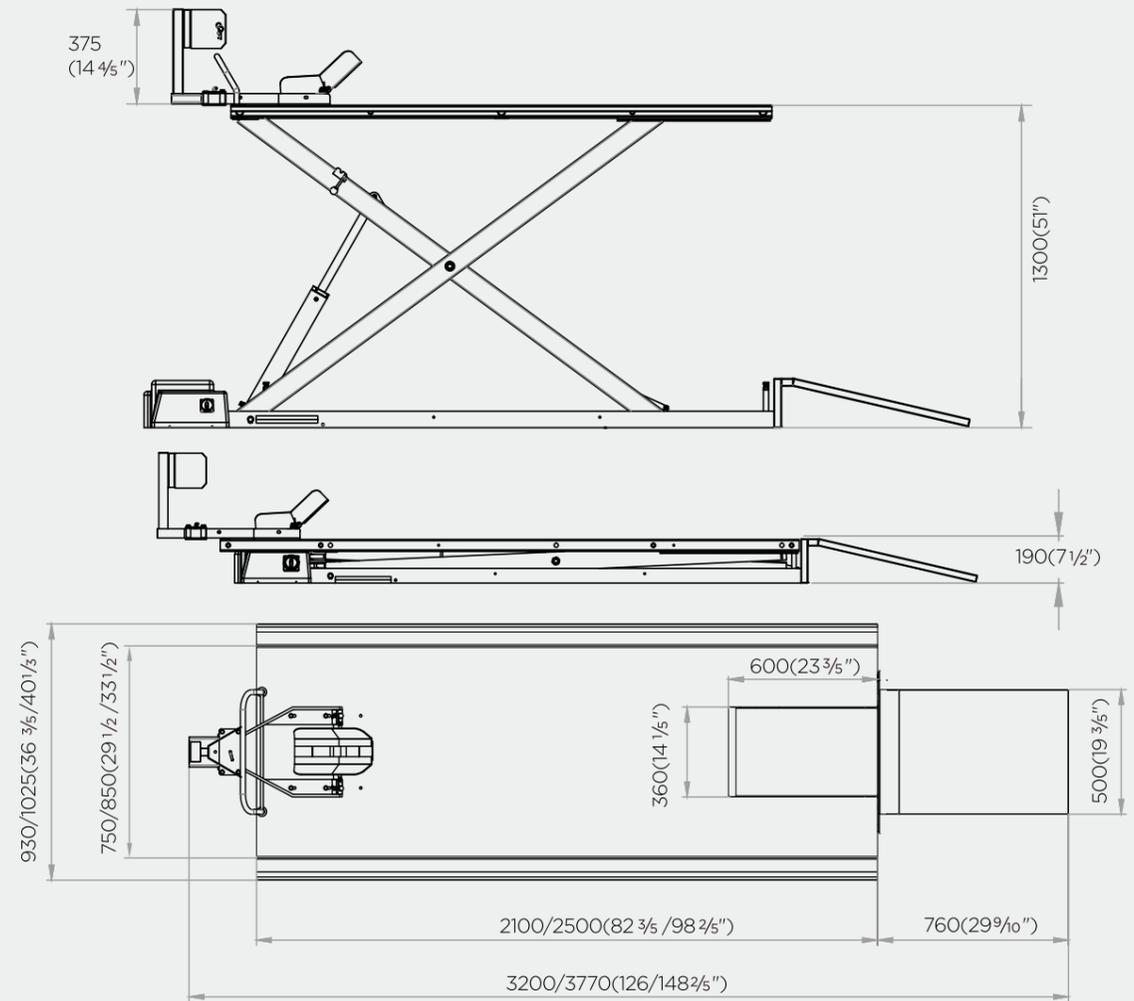

PL-M03/PL-M09


TECHNICAL DATA 技术参数

MODEL 型号	PL-M03	PL-M09
Capacity 举升重量	0.5 Ton	0.7 Ton
Lifting height 举升高度	1300mm(51")	1300mm(51")
Min height 平台高度	190mm(7 1/2")	190mm(7 1/2")
Platform length 平台长度	2100mm(82 3/5")	2500mm(98 2/5")
Power supply 电源功率	110V/220V/230V/240V 1ph 0.75kw	110V/220V/230V/240V 1ph 1.1 kw

PL-M08/M10

Ultra-thin Motorcycle Lift

超薄式摩托车举升机

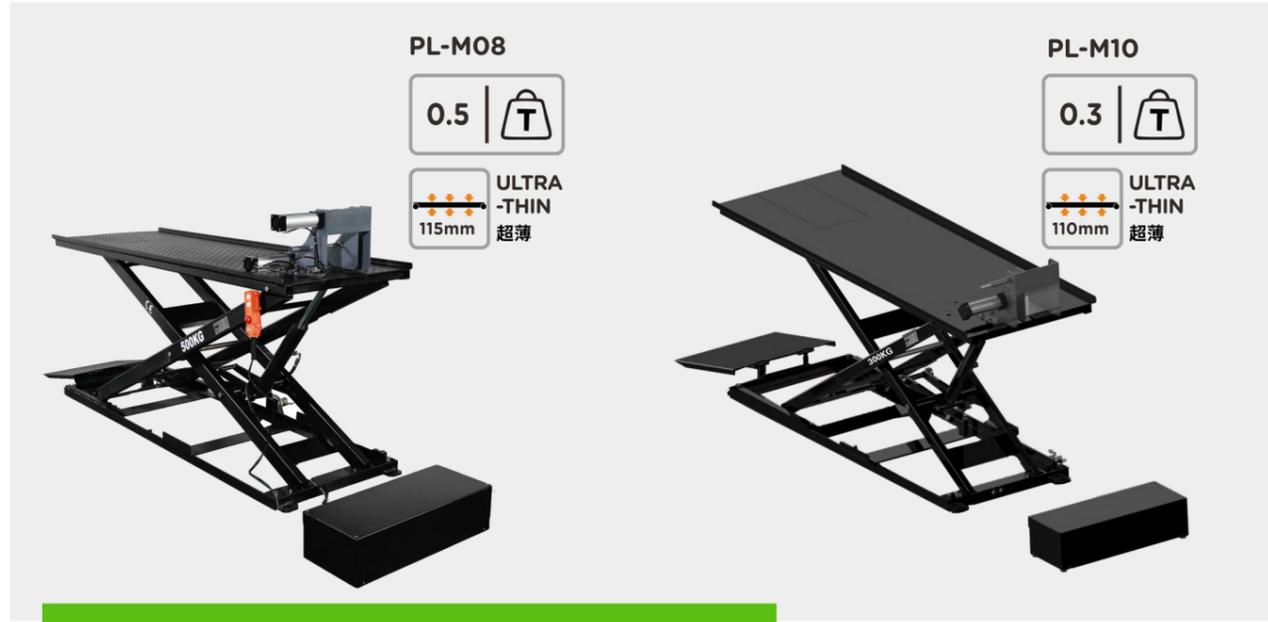

Electric Lock Release
电动解锁



Electromagnetic Lowering
电磁下降

SAFETY FEATURES 安全特点



Height limit switch
高度限位开关



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护


STANDARD 标准配置



Foot-switch for the pneumatic wheel clamp
气动轮夹脚踏



Magnet controller, convenient for storing
控制盒带磁铁, 便于收纳




Ramp Assembly
翻转式上车板



Integrated power unit
综合动力单元




Pneumatic Wheel Clamp (big)
标配气动轮夹 (大)



Pneumatic Wheel Clamp (small)
标配气动轮夹 (小)

DIMENSION 尺寸参数

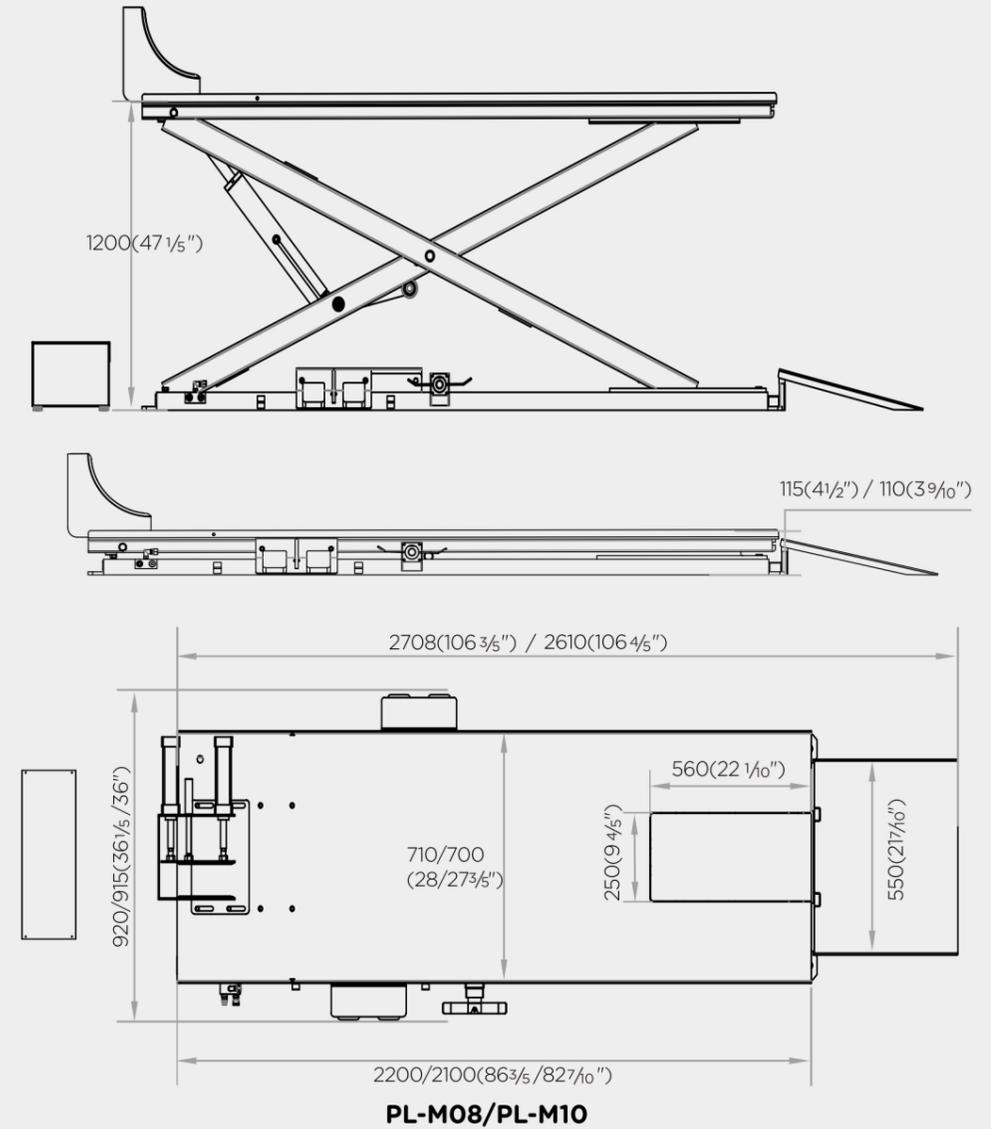

TECHNICAL DATA 技术参数

MODEL 型号	PL-M08	PL-M10
Capacity 举升重量	0.5 Ton	0.3 Ton
Lifting height 举升高度	1200mm(47 1/8 ")	1200mm(47 1/8 ")
Min height 平台高度	115mm(4 1/2 ")	110mm(4 3/16 ")
Platform length 平台长度	2200mm(86 3/5 ")	2100mm(82 7/16 ")
Power supply 电源功率	110V/220V/230V/240V 1ph 0.75kw	110V/220V/230V/240V 1ph 1.1 kw

PL-FS35/FS35D/FS40 PL-FS45/FS50/FS55

Four Post Vehicle Lift For Wheel Alignment

四轮定位四柱举升机



(CE: ONLY FOR PL-FS35/FS40/FS45/FS55)



3.5
4.0
4.5
5.0
5.5

Single Manual Lock Release
单边手动解锁

For wheel alignment
四轮定位

Optional Pneumatic Lock Release
选配气动解锁

Rolling jack (OPTIONAL)

二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation
方便客户自行安装



Manual Control
手动小车



Pneumatic Control
气动小车

FS35 FS35D FS40 FS45 --PL-X20TS/X20TQ

FS50 FS55 --PL-X30TS/X30TQ

FS35 FS35D FS40 FS45 推荐PL-X20TS/X20TQ,

FS50 FS55 推荐PL-X30TS/X30TQ

OPTIONAL

可选配置



Position-adjustable turntable
(选配) 转角盘, 位置可调



Drive-by-wire button
(选配) 线控按钮



Power unit cover + Cable carrier
(选配) 动力单元罩子+油管保护坦克链


SAFETY FEATURES 安全特点




Big Pulley for steel rope
大钢丝滚轮



Height limit switch
高度限位开关



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Abrasion resistant slip plates for 4 wheel alignment
四轮定位耐磨侧滑配置





Equipped with main insurance and rope break insurance on each column
每个立柱设有主保险和断绳保险

DIMENSION 尺寸参数

PL-FS35/FS35D/FS40

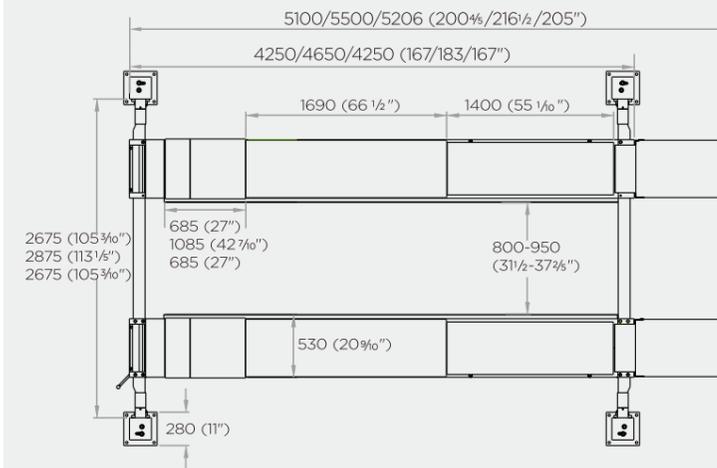

PL-FS45/FS50/FS55

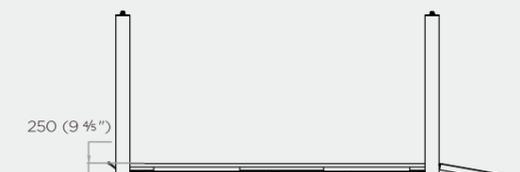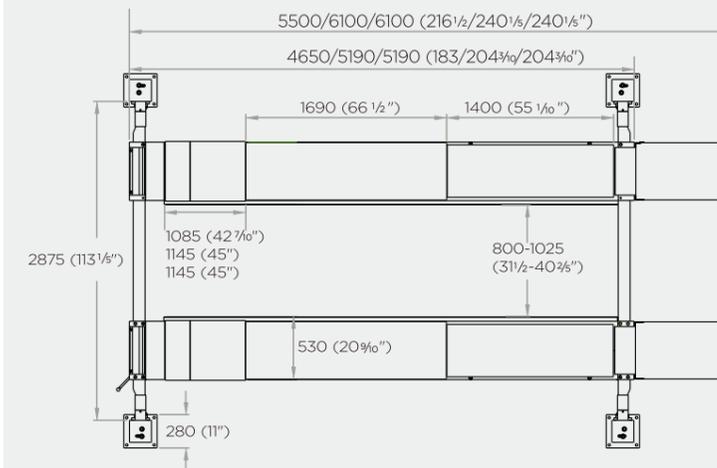

TECHNICAL DATA 技术参数

MODEL 型号	PL-FS35/FS35D/FS40	PL-FS45/FS50/FS55
Capacity 举升重量	3.5 / 3.5 / 4.0 Ton	4.5 / 5.0 / 5.5 Ton
Lifting height 举升高度	1750mm(69")	1750mm(69")
Min height 平台高度	225/225/250mm(8 9/16 / 8 9/16 / 9 4/8 ")	250mm(9 4/8 ")
Platform length 平台长度	4250/4650/4650mm(167/183/183")	5190mm(204")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

PL-F35/F40/F45 PL-F50/F55

Four Post Vehicle Lift

平板四柱举升机



(CE: ONLY FOR PL-F35/F40/F45/F55)



3.5
4.0
4.5
5.0
5.5

- Single Manual Lock Release**
单边手动解锁
- Optional Pneumatic Lock Release**
选配气动解锁

Rolling jack (OPTIONAL)

二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation
方便客户自行安装



Manual Control
手动小车



Pneumatic Control
气动小车



Electric Control
电动小车

F35 F40 F45 --PL-X20TD/X20TS/X20TQ
F50 F55 --PL-X30TD/X30TS/X30TQ
F35 F40 F45 推荐PL-X20TD/X20TS/X20TQ
F50 F55 推荐PL-X30TD/X30TS/X30TQ

OPTIONAL

可选配置




Drive-by-wire button
(选配) 线控按钮




Power unit cover +
Cable carrier
(选配) 动力单元罩子+
油管保护坦克链

DIMENSION 尺寸参数

PL-F35/F40/F45

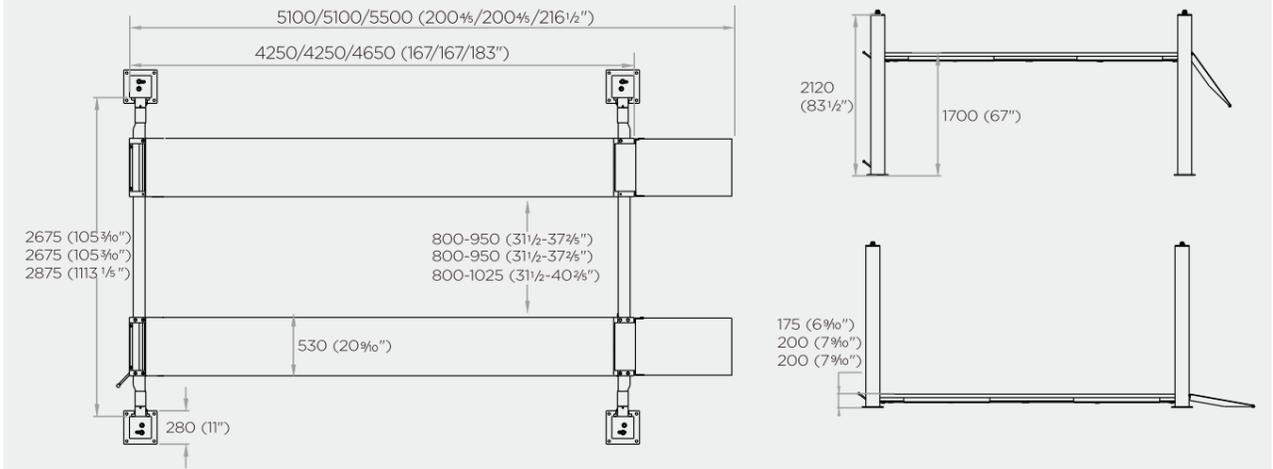

PL-F50/F55

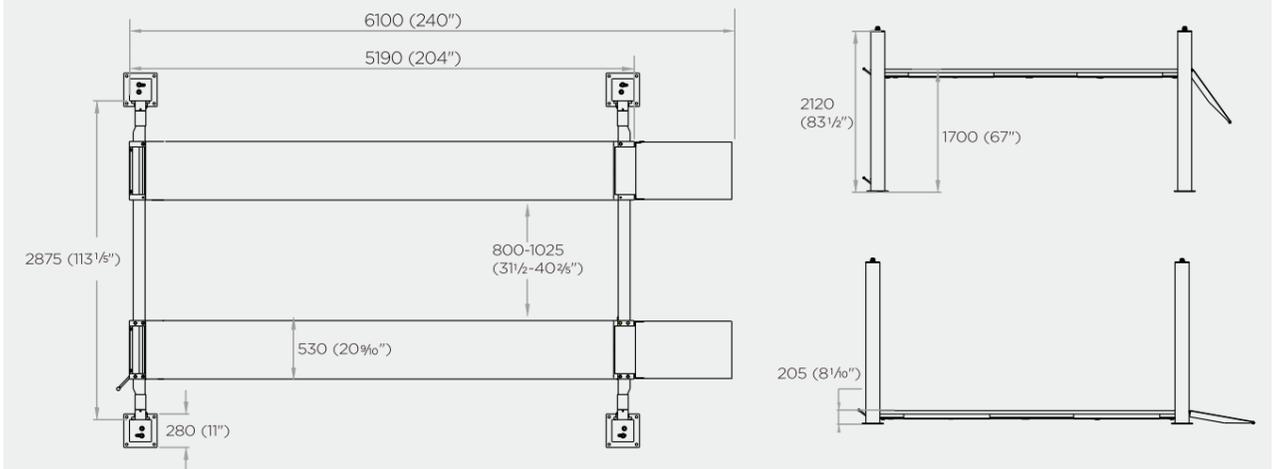


SAFETY FEATURES 安全特点




Big Pulley for
steel rope
大钢丝滚轮



Height limit switch
高度限位开关



Safety valve for
anti-explosion of
hydraulic system
安全阀加强安全保护



Equipped with main
insurance and rope
break insurance on
each column
每个立柱设有主保险和
断绳保险

TECHNICAL DATA 技术参数

MODEL 型号	PL-F35/F40/F45	PL-F50/F55
Capacity 举升重量	3.5 / 4.0 / 4.5 Ton	5.0 / 5.5 Ton
Lifting height 举升高度	1700mm(67")	1700mm(67")
Min height 平台高度	175/200/200mm(6 9/16/7 9/16/7 9/16")	205mm(9 4/5")
Platform length 平台长度	4250/4250/4650mm (167/167/183")	5190mm (204")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

